



INSTALLATION INSTRUCTIONS

Accessory

**HALF NOSE MASK
P/N 08P35-S5D-100H**

Application

**2004-2005 CIVIC
2- AND 4-DOOR**

Publications No.

All 27870


Issue Date

AUG 2004


Keep this information in the glove box for future reference.

PARTS LIST


Mask
(hood section)

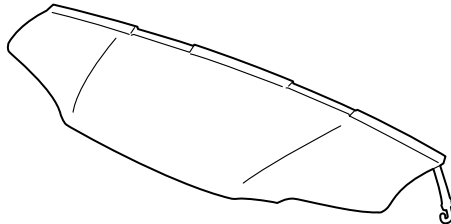

Right side mask
(fender section)



Left side mask
(fender section)



2 Snap-screws



2 Washers



2 Fenderwell nuts



TOOLS REQUIRED

Stubby Phillips screwdriver

Flat-tip screwdriver


INSTALLATION

NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Make sure the hood and nose of the vehicle have been waxed with a high-quality paste wax.
- Make sure you install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.


Installing the Hood Section

1. Open the hood. Fit the corners of the mask around the hood by pressing out the wrinkles and gently pulling the nose mask toward you. Adjust the mask so that it fits smoothly over the edges. Attach the five "S" hooks to the hood.

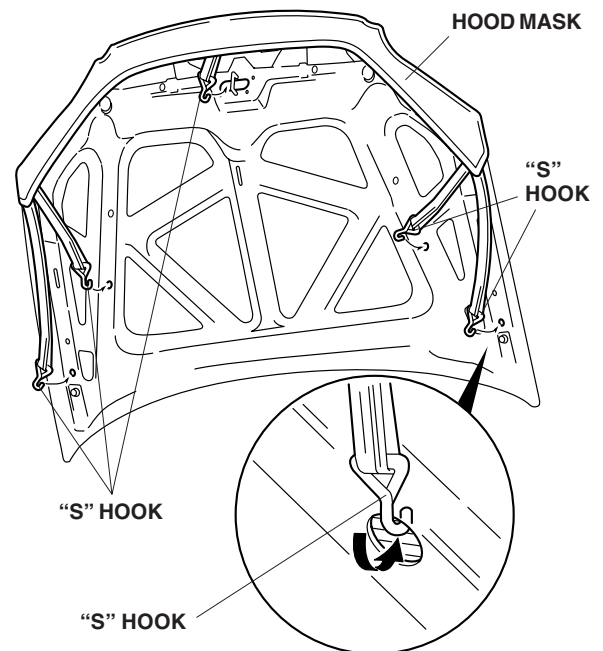


Installing the Fender Section

- Turn the steering wheel all the way clockwise.
- Pry out the plastic pin, and remove the expansion clip that fastens the inner fender; remove and retain the clip, then clean the area around the hole.

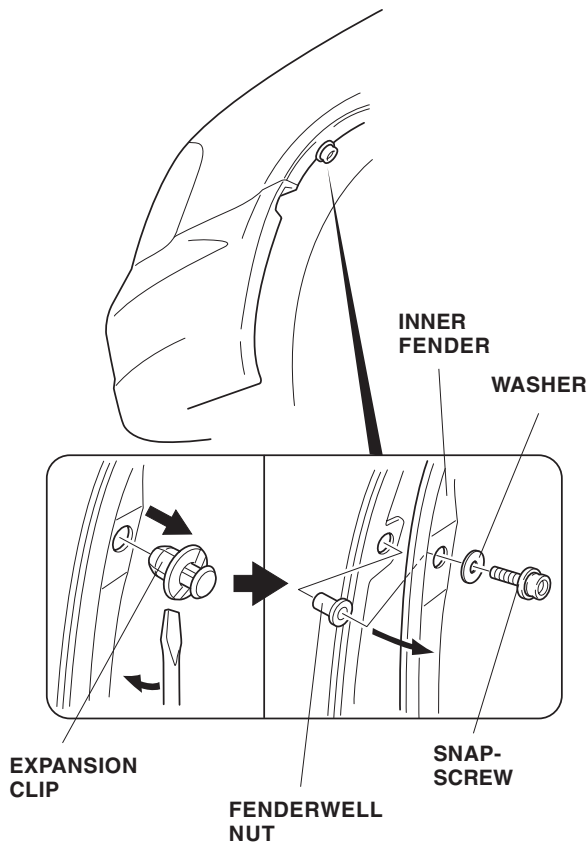

- Pull the inner fender away, and press one fenderwell nut (supplied) into the hole in the fender flange.
- With its washer in place, securely tighten one snap-screw into the fenderwell nut.
- Turn the steering wheel all the way counterclockwise, and repeat steps 3 through 5 on the right side.

- Slip the pocket of the mask's fender section onto the front corner of the fender, then attach the plastic hook to the top inside edge of the fender. Fit the mask across the fender, and attach the mask to the other side in the same way.

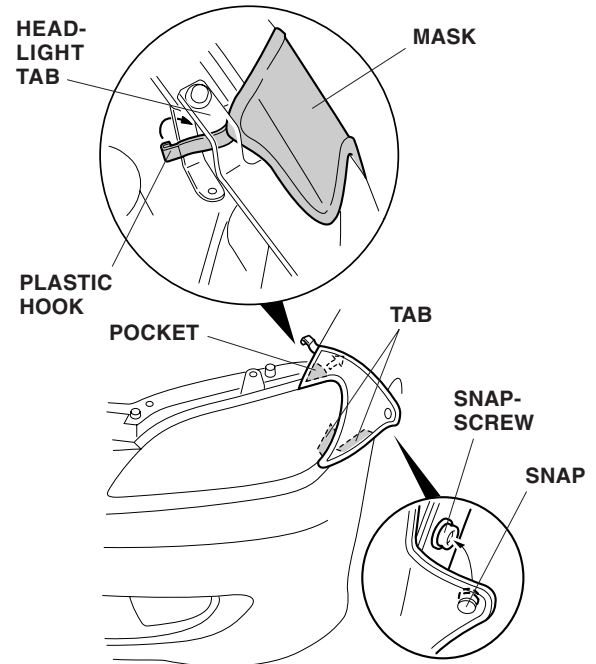

- Insert one tab between the headlight and the front bumper, and insert one tab between the fender and the front bumper.
- Pull the mask back toward the wheelwell, smooth out any wrinkles, and then snap the mask onto the snap-screw. Repeat on the other side.
- Put these instructions and expansion clips (removed in steps 3) in the glove box.

CLEANING THE NOSE MASK

Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang it to dry out of direct sunlight. Make sure the mask is completely dry before you reinstall it.