



# INSTALLATION INSTRUCTIONS

Accessory

REAR SPLASH GUARDS  
P/N 08P09-S9V-100

Application

2003-2005 PILOT

Publications No.


All 28068

Issue Date


SEP 2004

## PARTS LIST

Left rear splash guard



Right rear splash guard



4 Self-tapping screws  
(2 not used)



2 Clip nuts



## TOOLS REQUIRED


Stubby Phillips screwdriver

Phillips screwdriver


## INSTALLATION

NOTE: These installation instructions show the left rear splash guard being installed; the same procedure applies to installing the right rear splash guard.

1. Remove and retain the two self-tapping screws from the rear bumper and the inner fender.

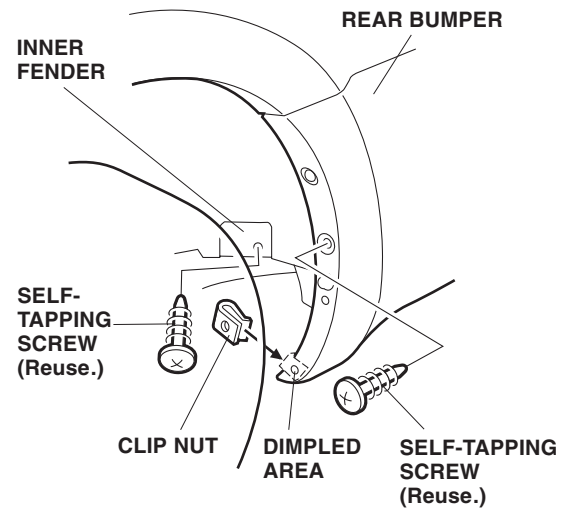

2. Slide the clip nut over the dimpled area of the rear bumper.
3. Position the left rear splash guard on the inner fender and rear bumper, and install three self-tapping screws. Reuse the two screws you removed, and use one screw from the kit.

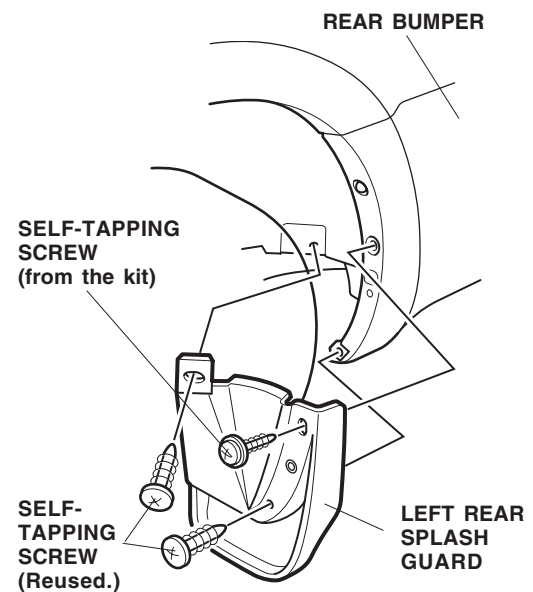

4. Repeat steps 1 through 3 to install the right splash guard.