



## INSTALLATION INSTRUCTIONS

### Accessory

FRONT GRILLE  
P/N 08F21-T2F-100

### Application

2017 ACCORD  
4-DOOR

### Publications No.


VERSION 1

### Issue Date

JUN 2016

## PARTS LIST

Front grille



## TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Masking tape


Blanket

10 mm Open end wrench

*The following tool is available through the Honda Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search". Or, call 888-424-6857.*

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

### Illustration of the Front Grille on the Vehicle

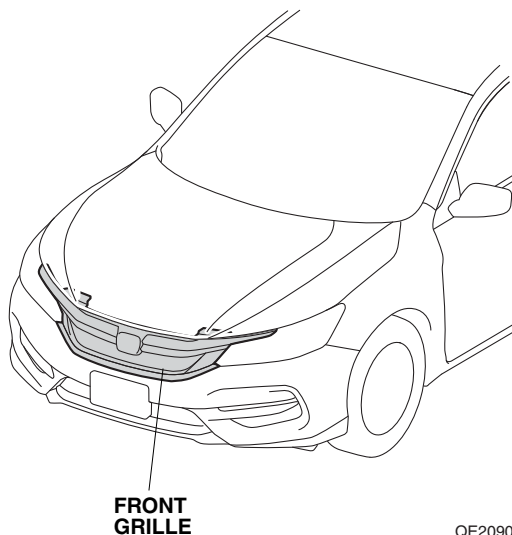

FRONT  
GRILLE

QE20901AG

## INSTALLATION

**Customer Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

**NOTE:** Be careful not to damage the paint finish.

1. Disconnect the negative cable from the battery.
2. Attach masking tape to the front bumper, headlights and front fenders as shown.

RIGHT  
HEADLIGHT

LEFT  
HEADLIGHT


FRONT  
BUMPER

FRONT  
FENDER

MASKING  
TAPE


QE13001AA

3. Remove the front grille cover.

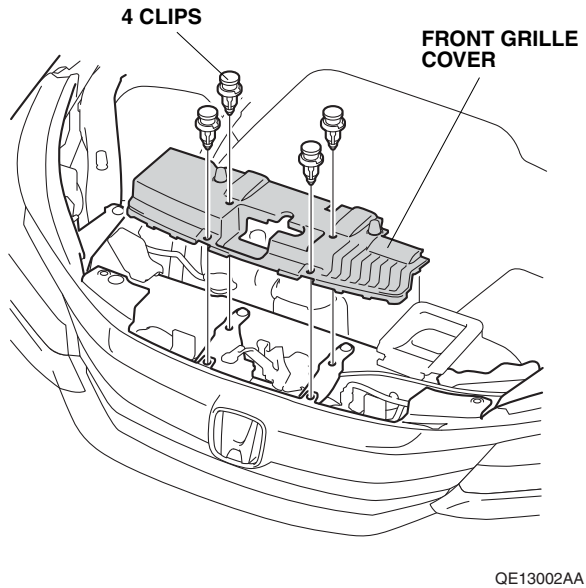


4. Remove the front bumper.


- Remove the four self-tapping screws, twelve clips.

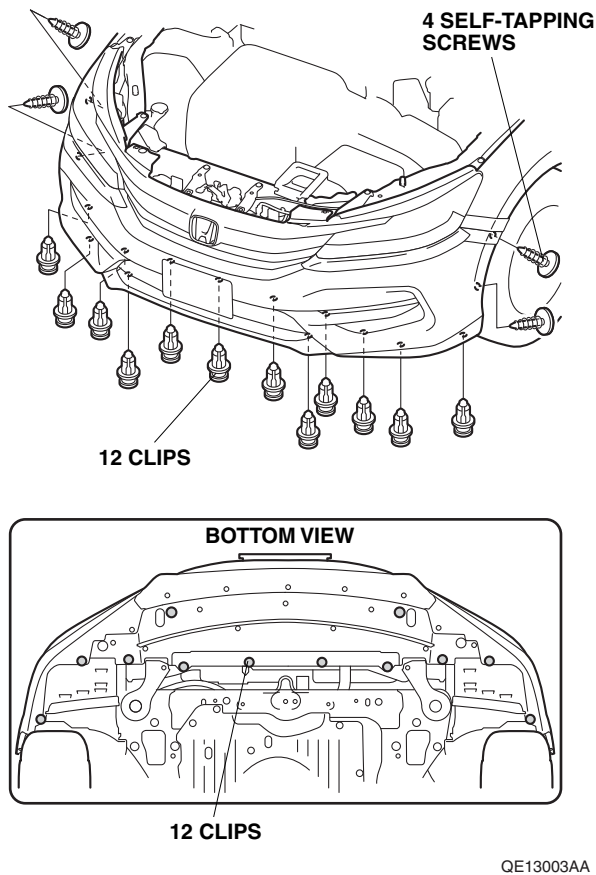


- Release the four retaining tabs on each side.

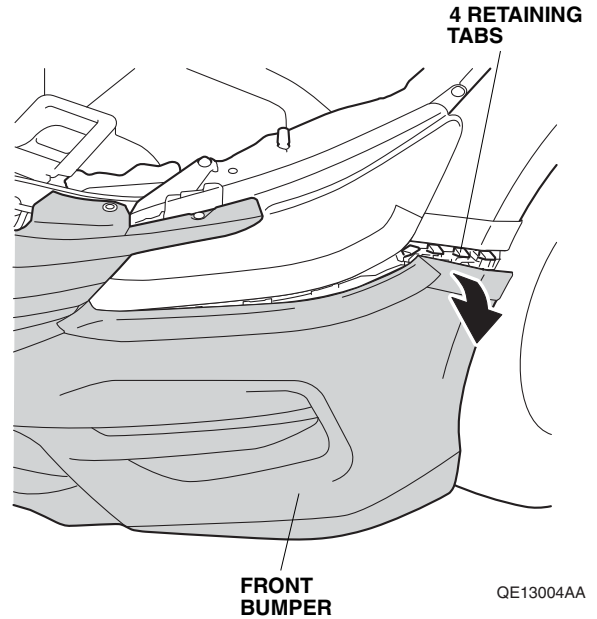


- Release the four retaining tabs on each side.

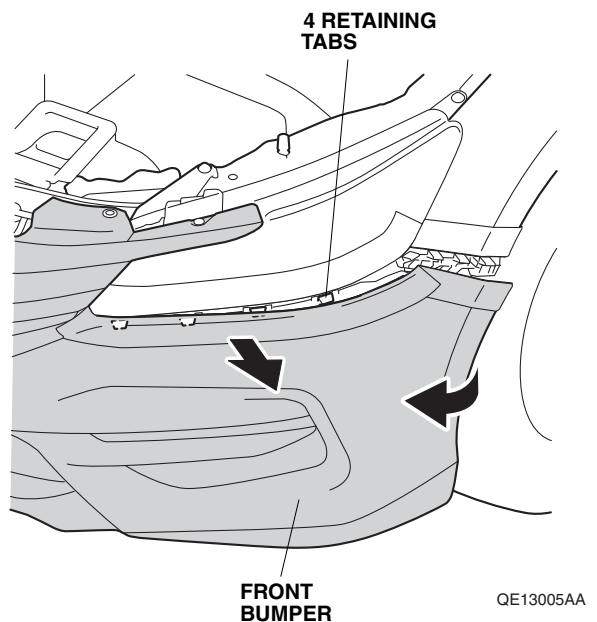


- Remove the two clips and two short clips.
- With the help of an assistant, remove the front bumper.
- Place the front bumper on a blanket.

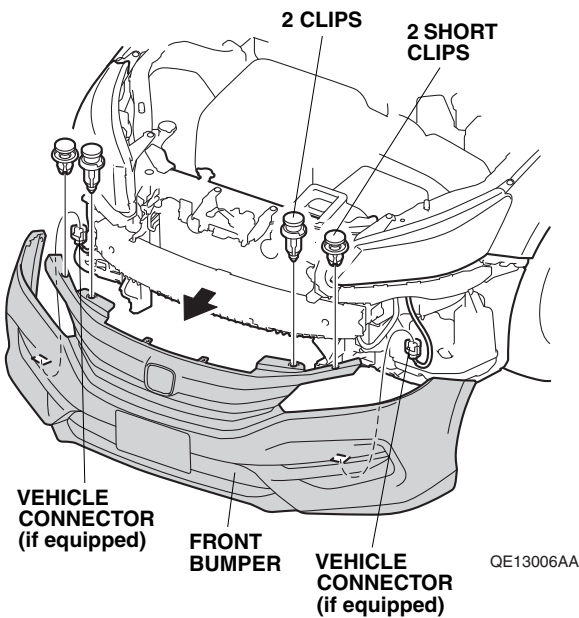


5. Remove the vehicle front grille.

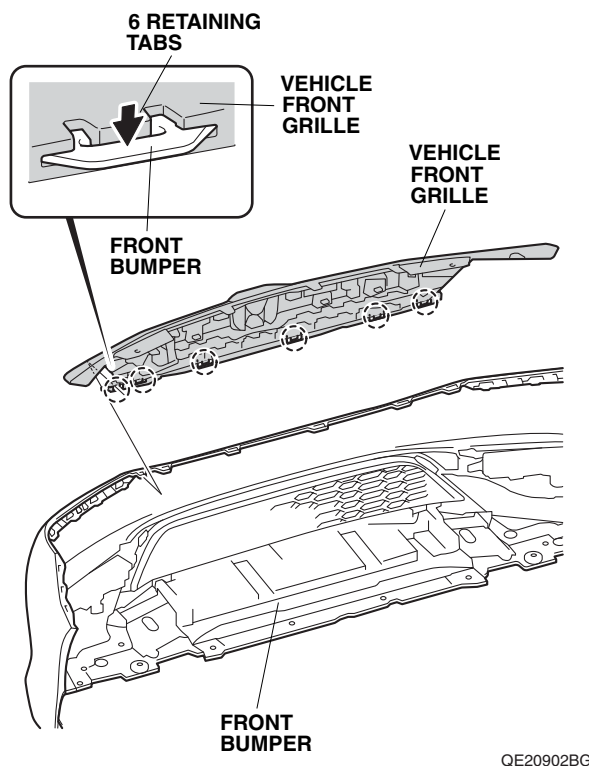


6. Remove the front grille duct.

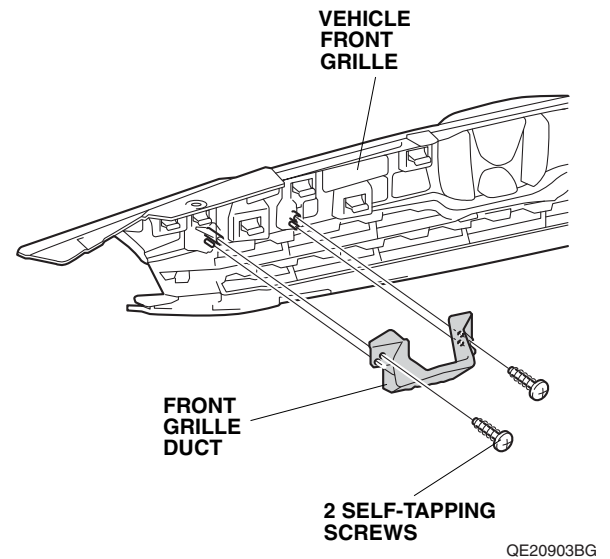

7. Install the front grille duct to the front grille with the two self-tapping screws removed in step 6.

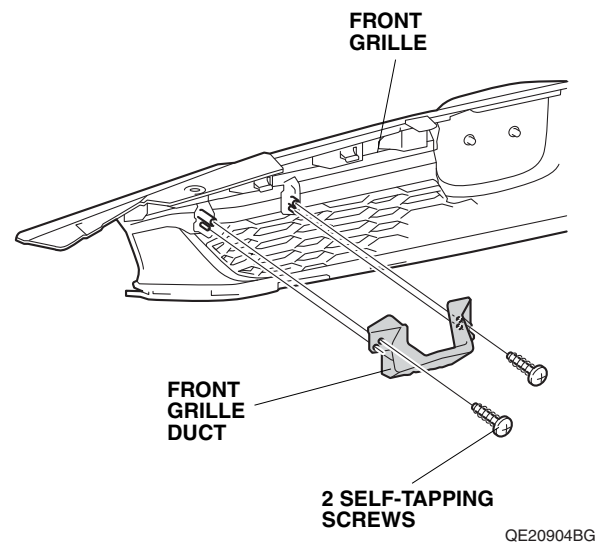

8. Install the front grille on the front bumper with the six retaining tabs.

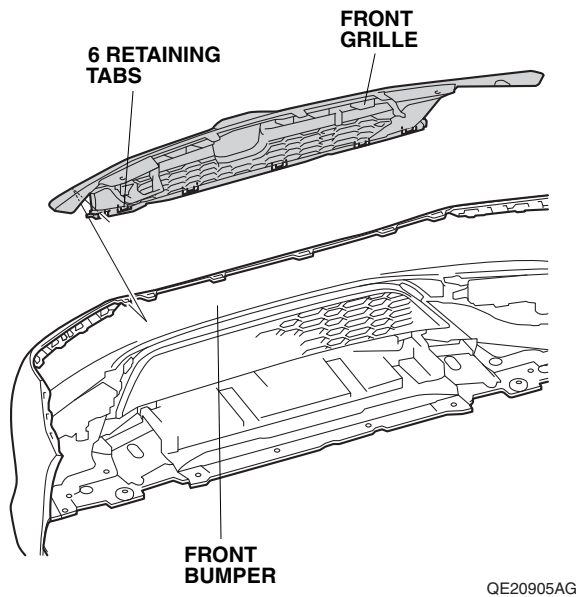

10. Check that all wire harnesses are routed properly and all connectors are plugged in.
11. Install all removed parts.
12. Connect the negative cable to the battery.
13. Press and hold the audio unit power button for two seconds to restore the audio and navi; (if equipped) system functions.
14. Set the clock (vehicles without navigation).

9. With the help of an assistant, install the front bumper.

