



HONDA INSTALLATION INSTRUCTIONS

Accessory
REAR BUMPER
METAL PANEL
P/N 08P01-TVA-100

Application
2018 ACCORD

Publications No.
VERSION 1
Issue Date
OCT 2017

PARTS LIST

Rear bumper metal panel



Alcohol wipe



TOOLS AND SUPPLIES REQUIRED

Masking tape

Felt-tip pen

Ruler

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

Rubber Roller (T/N MHLE54D)

Illustration of the Rear Bumper Metal Panel on the Vehicle



REAR BUMPER
METAL PANEL

QFD2301AA

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:


- Do not damage the body paint finish.
- This kit should be installed only if the ambient air temperature is 15°C (60°F) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Make sure the customer is aware of this.

Installing the Rear Bumper Metal Panel

1. Open the trunk lid. Attach masking tape to the rear bumper, and mark it using a felt-tip pen as shown.

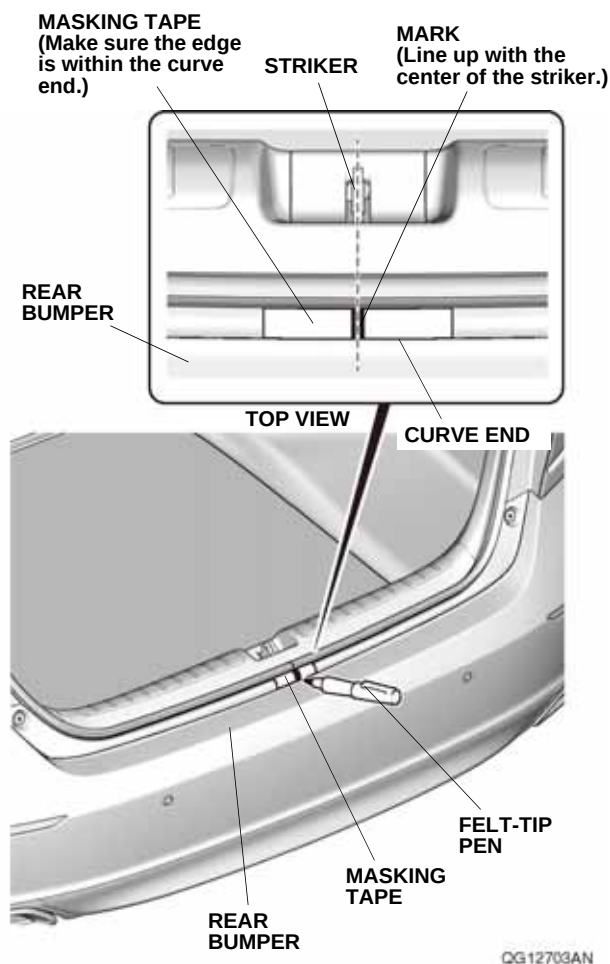


2. Line up the mark on the sticker with the mark on the masking tape. Then, attach masking tape at both ends as shown.

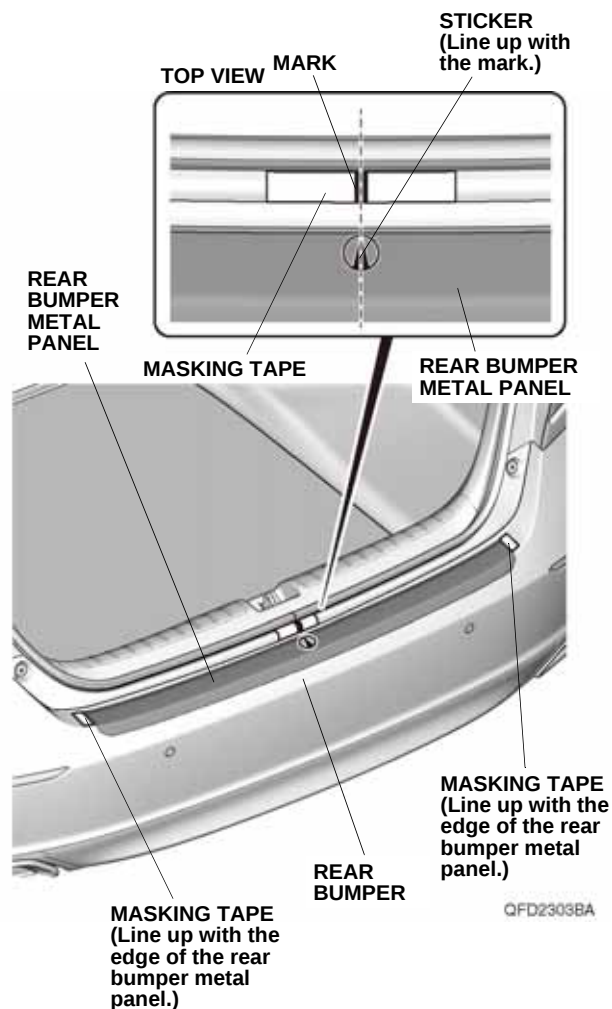


3. Remove the rear bumper metal panel from the rear bumper.


- Using the alcohol wipe, thoroughly clean the rear bumper where the rear bumper metal panel will attach.

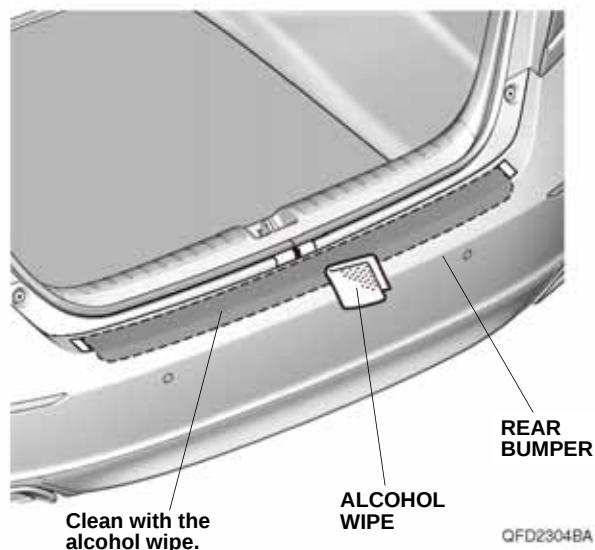


- Peel back the adhesive backings, and tape them to the front surface of the rear bumper metal panel with masking tape. Remove the remaining adhesive backings.

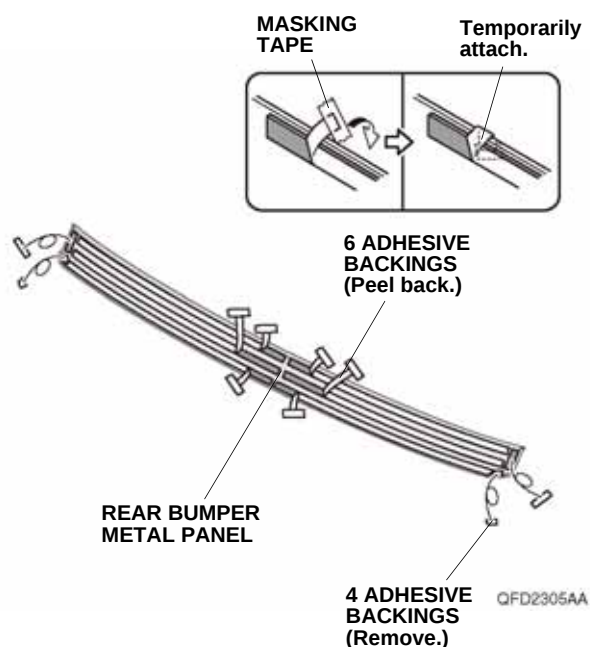


- Attach the rear bumper metal panel to the rear bumper by lining it up with the masking tape as shown.

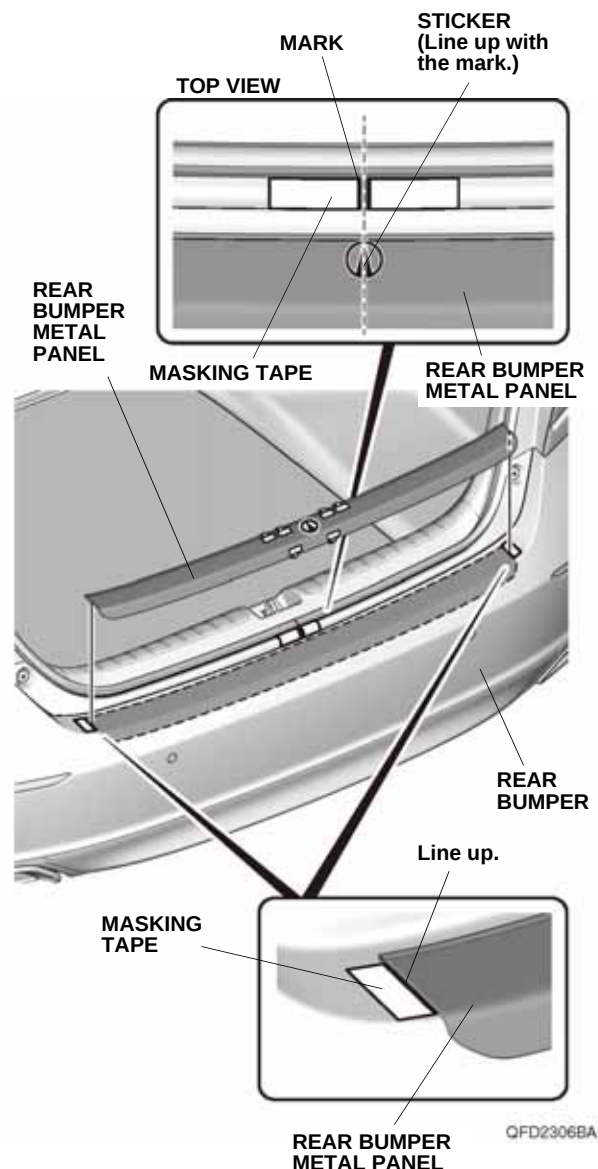

7. While applying light pressure to the rear bumper metal panel, carefully remove the taped adhesive backings as shown.

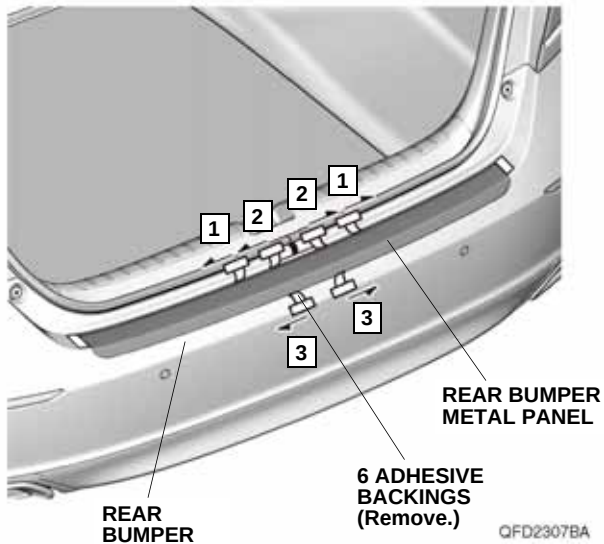

8. Using a rubber roller, apply firm pressure against the rear bumper metal panel and roll from one end to the other.
NOTE: Apply firm pressure especially at the ends.

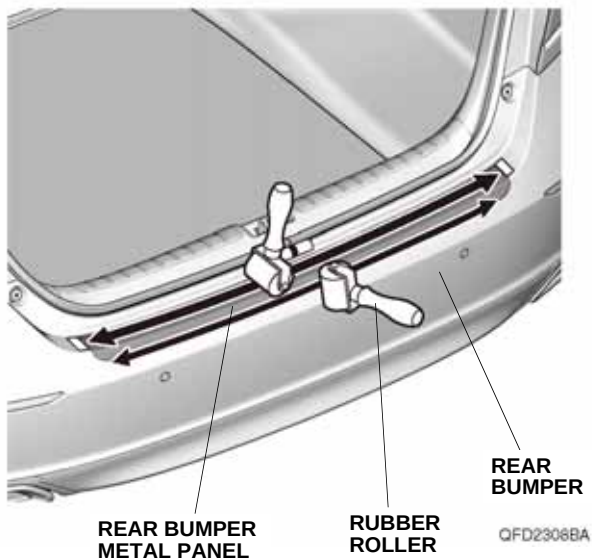

9. Remove masking tape and the sticker on the rear bumper metal panel.