



HONDA INSTALLATION INSTRUCTIONS

Accessory
REAR SEAT COVERS


Application
201) CIVIC
4-DOOR

Publications No.
VERSION 1
Issue Date
SEPT 2014


PARTS LIST

**Seat Cover Kit
(60/40 Split Fold-Down Rear Seat-Back)
P/N 08P32-TR0-100**


Seat-back covers




Left seat side bolster cover




Right seat side bolster cover



Armrest cover




Seat cushion cover




Seat Cover Kit (Fold-Down Rear Seat-Back) P/N 08P32-TR0-100A


Seat-back covers




Left seat side bolster cover



Right seat side bolster cover




Seat cushion cover




Seat Cover Kit (Fixed Rear Seat-Back) P/N 08P32-TR0-100B

Seat-back covers



Seat cushion cover




TOOLS AND SUPPLIES REQUIRED


Utility knife

Illustration of the Rear Seat Covers in the Vehicle


60/40 Split Fold-Down Rear Seat-Back

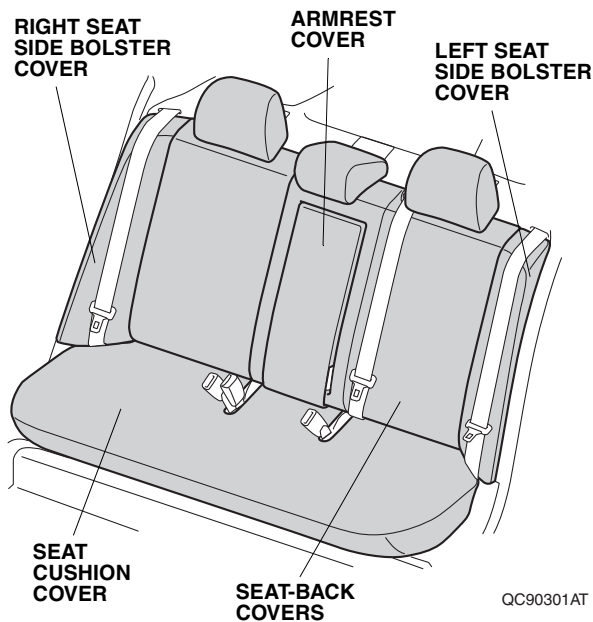

Fold-Down Rear Seat-Back

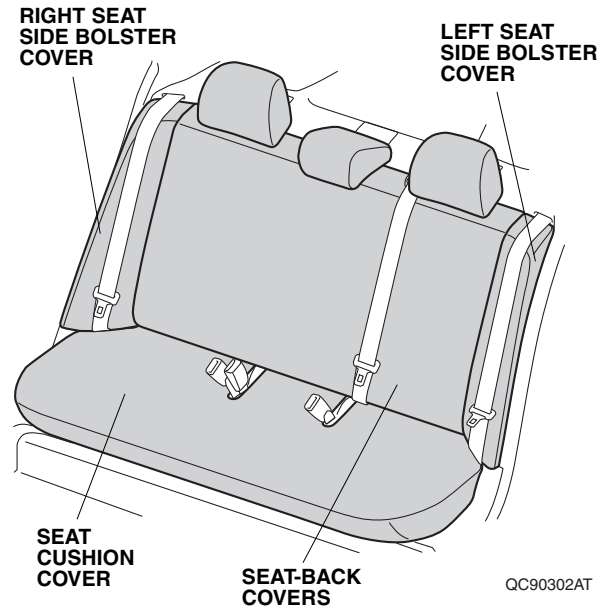


Fixed Rear Seat-Back

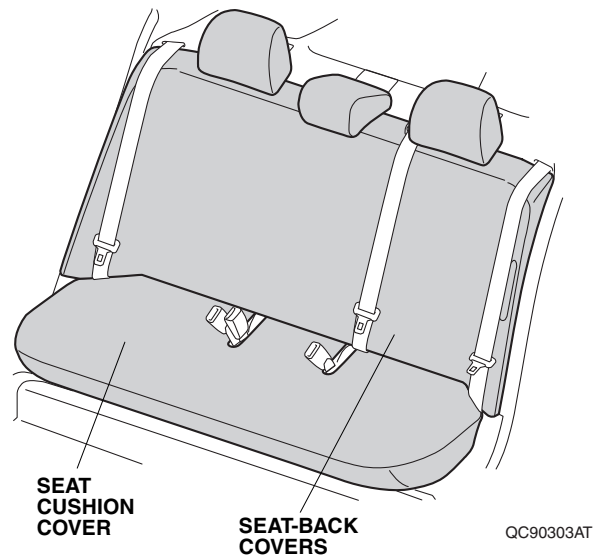

INSTALLATION

Installing the Headrest Covers

1. While pressing on each headrest guide knob, remove the three headrests by pulling them upward.

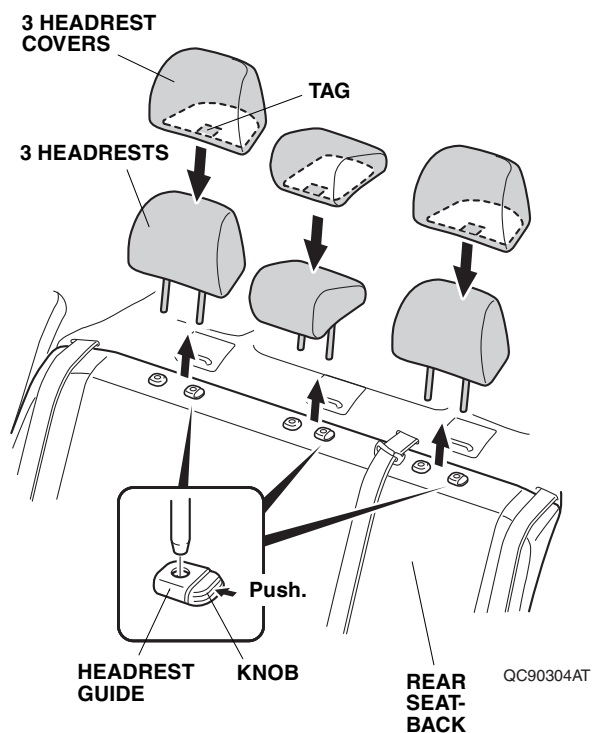


2. Fit three headrest covers over the headrests.

Installing the Seat-Back Covers

- If the vehicle is equipped with a fixed rear seat-back, go to step 16; otherwise, continue with step 3.


With 60/40 Split Fold-Down Rear Seat-Back and Fold-Down Rear Seat-Back

3. Pull out the center seat belt from the seat belt guide.

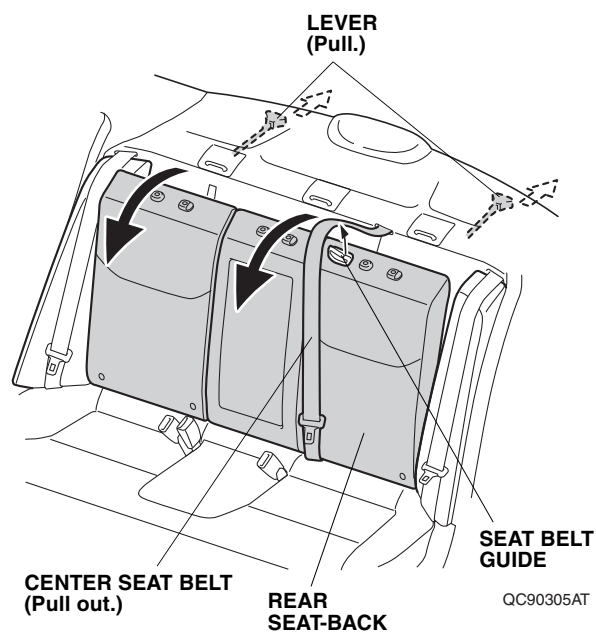

4. Open the trunk. Pull the lever, and fold the rear seat-back forward.

5. Fit the left seat side bolster cover onto the left seat side bolster through the left seat belt. Insert the tabs to the left seat side bolster. Secure the fasteners to the left seat side bolster.

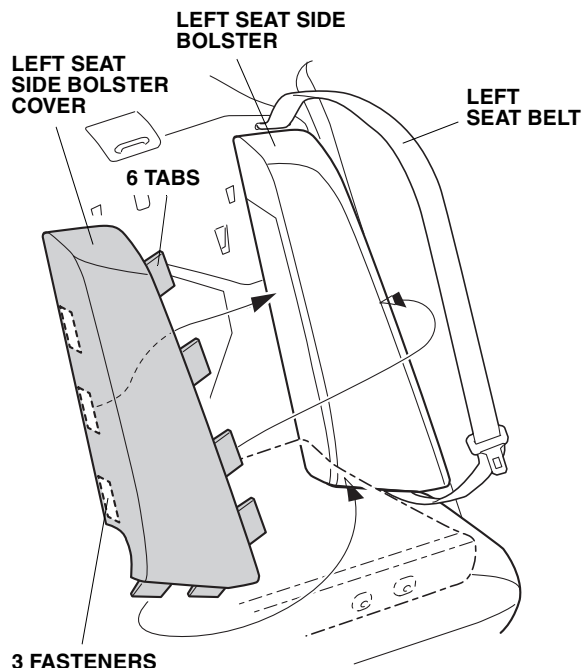


QC90306AT

6. Repeat step 5 to install the right seat side bolster cover on the right seat side bolster.

- If the vehicle is equipped with a 60/40 split fold-down rear seat-back, continue with step 7; otherwise, go to step 14.


With 60/40 Split Fold-Down Rear Seat-Back

7. Fit the left seat-back cover onto the left rear seat-back through the center seat belt. Insert the left seat-back cover under each headrest guide.

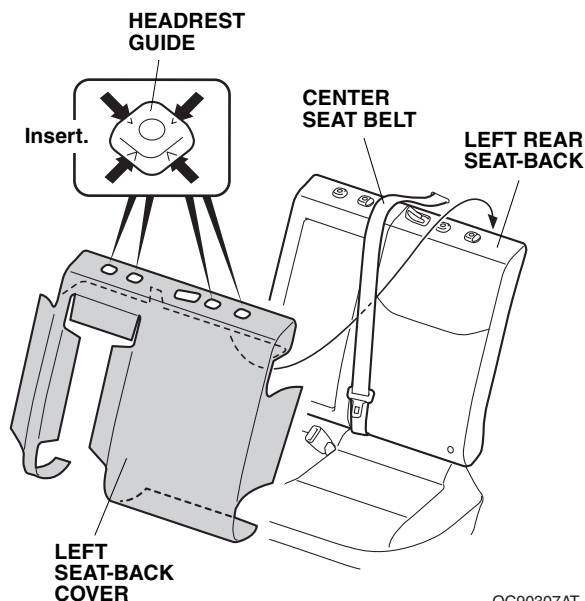


QC90307AT

8. Pull down the armrest, secure the fasteners to the left rear seat-back.

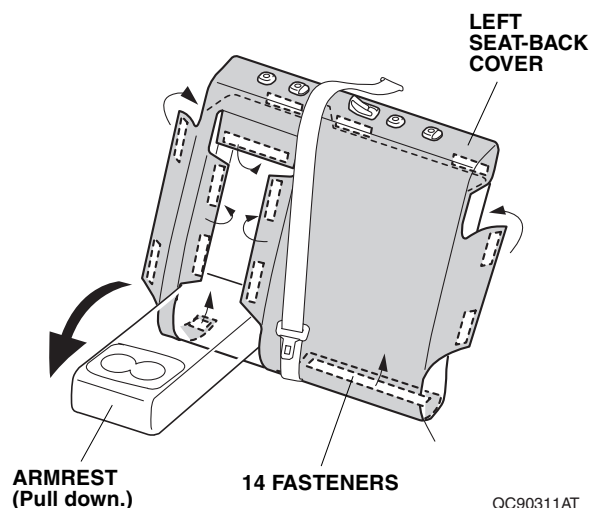


QC90311AT


9. Fit the right seat-back cover onto the right rear seat-back. Insert the right seat-back cover under each headrest guide.

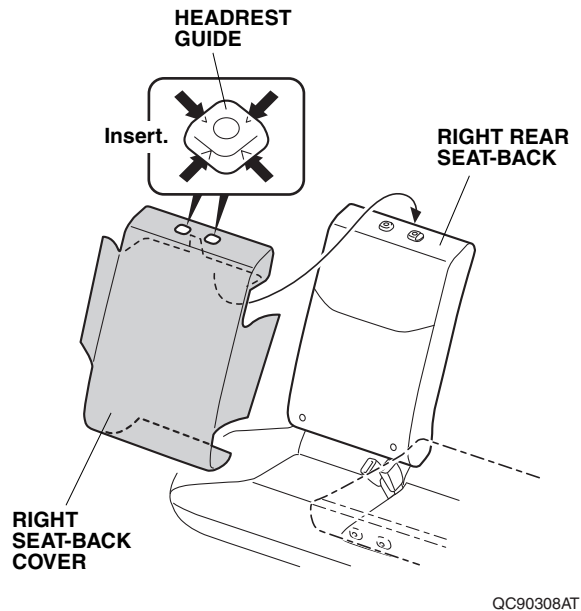


10. Secure the fasteners to the right rear seat-back.

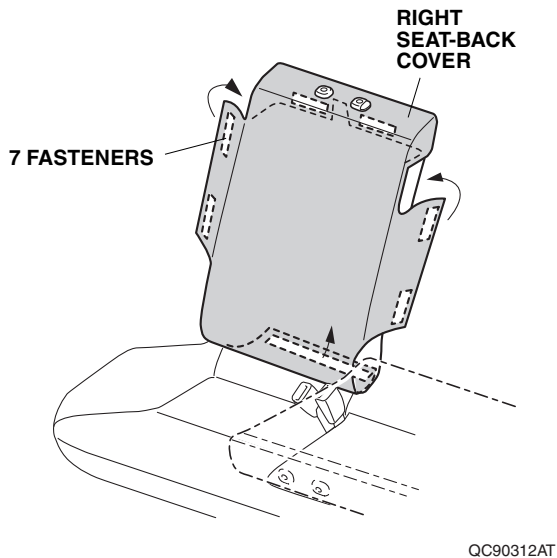

11. Install the armrest cover to the armrest.

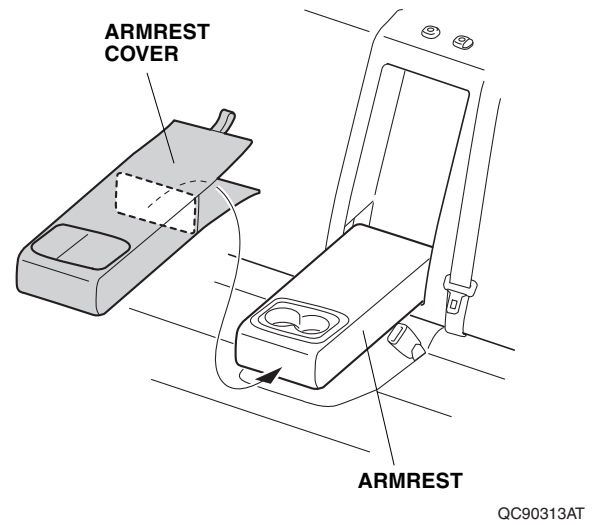


12. Raise the armrest. Pull out the armrest cover between the armrest and left rear seat-back, and secure the fasteners on the armrest cover as shown.

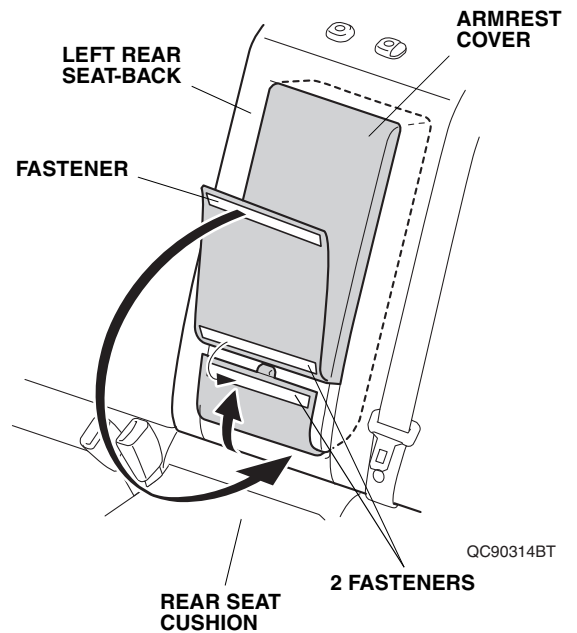


13. Secure the fastener to the left rear seat-back. Go to step 19.

With Fold-Down Rear Seat-Back

14. Fit the seat-back cover onto the rear seat-back through the center seat belt. Insert the seat-back cover under each headrest guide.

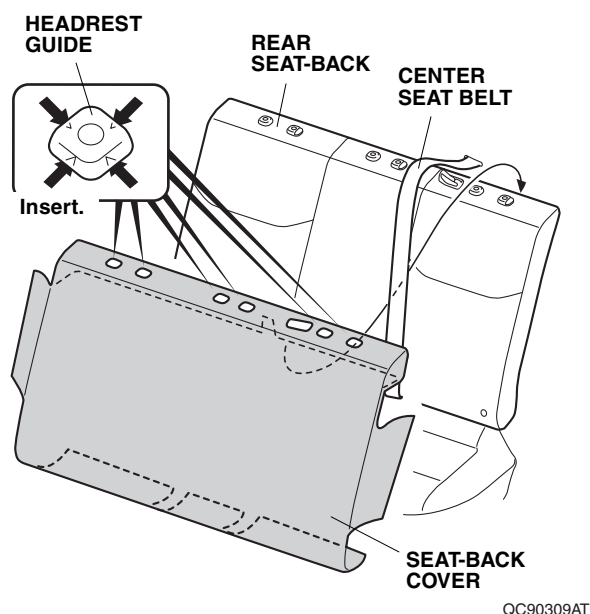


15. Secure the fasteners to the rear seat-back. Go to step 19.

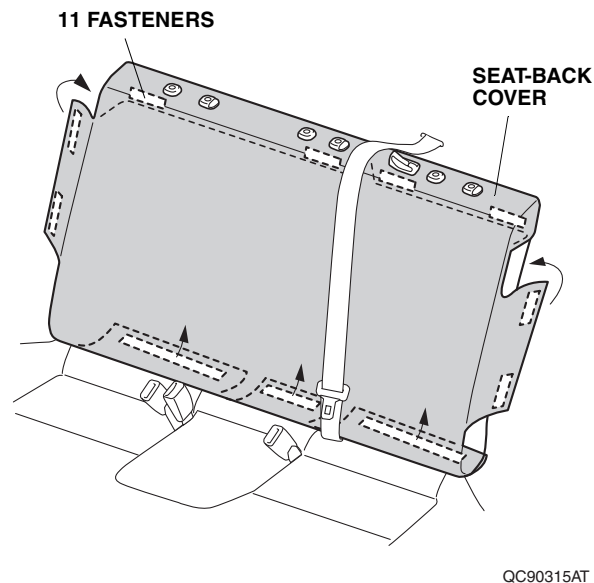


With Fixed Rear Seat-Back

16. If the vehicle is hybrid, remove the piece of the seat-back cover that covers the duct:


- Carefully cut out the overcast stitching with a utility knife. Remove the stitching and the duct cover.

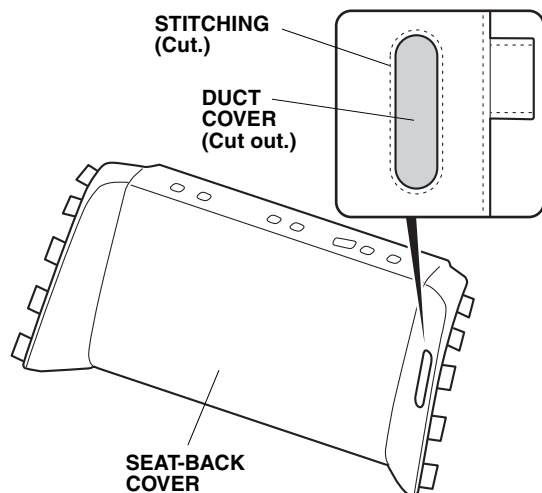

17. Pull out the center seat belt from the seat belt guide. Fit the seat-back cover onto the rear seat-back through the seat belts. Insert the seat-back cover under each headrest guide.

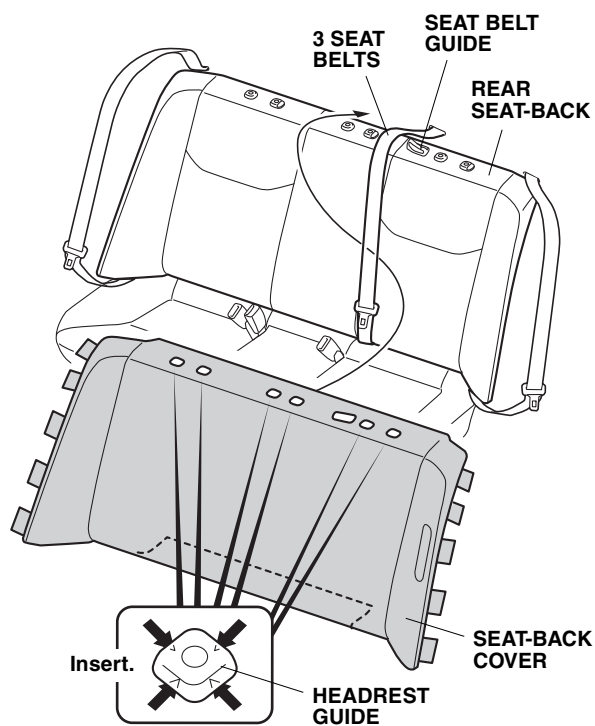


18. Insert the tabs to the rear seat-back. Secure the fasteners to the rear seat-back.

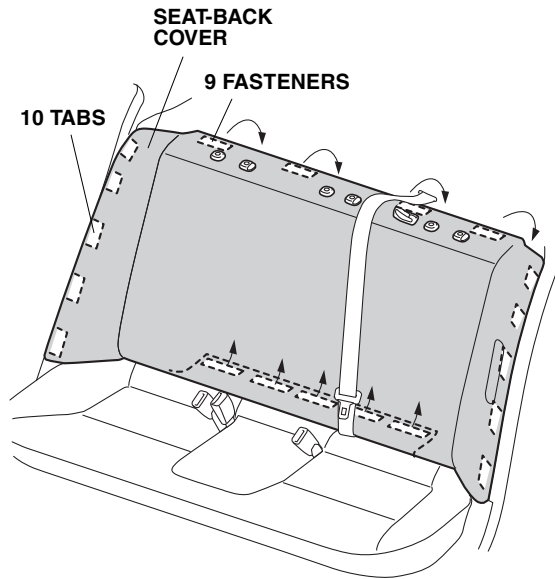

QC90316AT


Installing the Seat Cushion Cover

19. Fit the seat cushion cover onto the rear seat cushion. Attach each hook to the rear door sill trim.

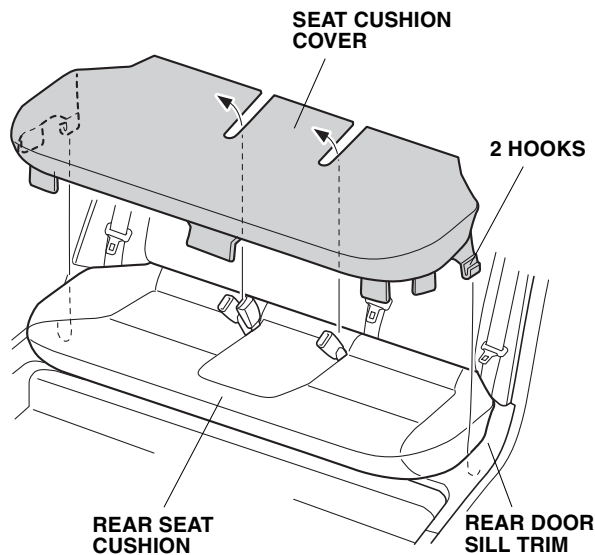

QC90317AT

20. Insert the tabs to the rear seat cushion. Secure the fasteners to the rear seat cushion under the seat anchors.

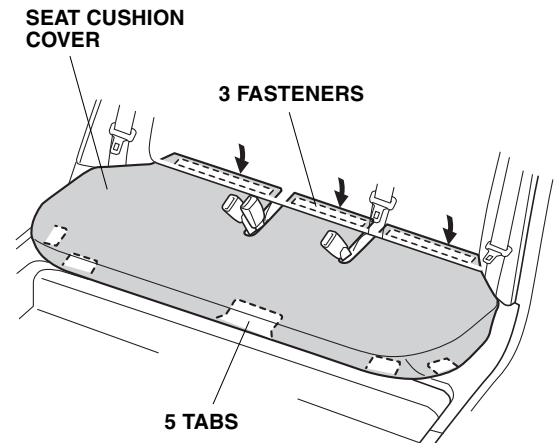

QC90318AT

21. Secure the center seat belt to the seat belt guide.
22. Reinstall the headrests.