INSTALLATION INSTRUCTIONS

SIDE UNDER SPOILERS P/N 08F04-TBA-100 2017 CIVIC 4-DOOR

Application

Publications No.
VERSION 1

Issue Date

SEP 2016

PARTS LIST


Left spoiler



Right spoiler



22 Seals



TOOL AND SUPPLIES REQUIRED


Phillips screwdriver

Stubby Phillips screwdriver

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

Plastic Trim Tool (T/N SILTRIMTL10)

Illustration of the Side Under Spoilers on the Vehicle



QE32435BH

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:

- These instructions show the left spoiler being installed.
 The same procedure applies to installing the right spoiler.
- Be careful not to damage the body paint finish.

Installing the Spoilers


1. Turn the steering wheel fully counterclockwise.




QE32420BH

5.


- Remove the three self-tapping screws from the left front inner fender.
- 3. Remove the two self-tapping screws from the left rear inner fender.



4. Remove the four clips from the left side sill trim.




Open the left front and rear doors.




QE32423AH

Remove the left side sill trim.


7. Close the left front and rear doors.




- 8. Remove the 11 clips from vehicle panel.
- 9. Remove and replace all 11 clip seals.




10. Remove three spring nuts from the left side sill trim.

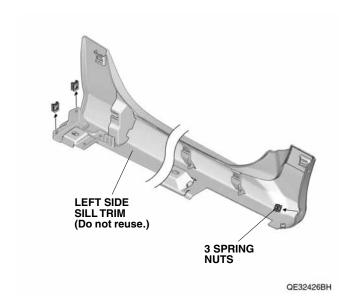


11. Install the three spring nuts on the side under spoiler as shown.

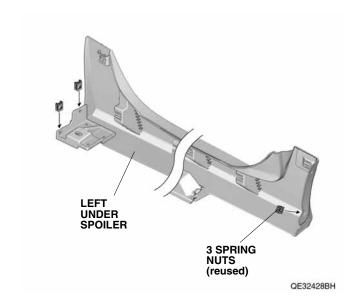


12. Install 11 clips on the left spoiler.




13. Install the left spoiler on the vehicle panel.



14. Attach the left spoiler to the vehicle panel with four clips.



15. Secure the front of the left spoiler with two self-tapping screws.



16. Secure the back of the left spoiler with two self-tapping screws.



17. Turn the steering wheel fully clockwise and repeat steps 2 through 16 on the right side of the vehicle.