INSTALLATION INSTRUCTIONS

REAR SEAT COVER P/N 08P32-T0A-100

2014 CR-V

Publications No.
All 50023

Issue Date
JULY 2013

Put this information in the glove box with the vehicle owner's manual.

#### **PARTS LIST**

Left rear seat cover



Right rear seat cover




Armrest cover



#### **INSTALLATION**

Installing the Headrest Cover


 While pressing on the headrest guide knob, remove the center headrest by pulling it upward.

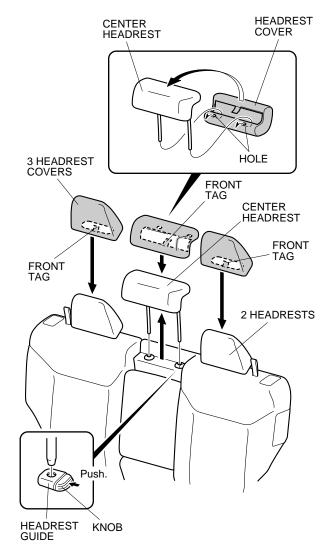


Fit the three headrest covers over the headrests.

Installing the Left Rear Seat Cover


3. Pull the lever, and fold the left rear seat cushion forward.

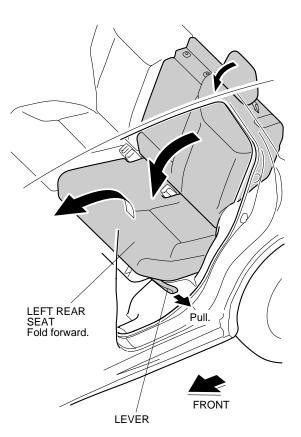


4. Raise the left rear seat back and headrest. Fold down the armrest.

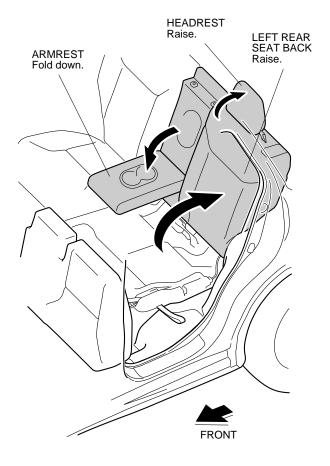

 Install the left rear seat back cover over the left rear seat back. Insert the left rear seat back cover under the headrest guide, and insert the tab into the left rear seat back. Secure the fasteners to the left rear seat back.

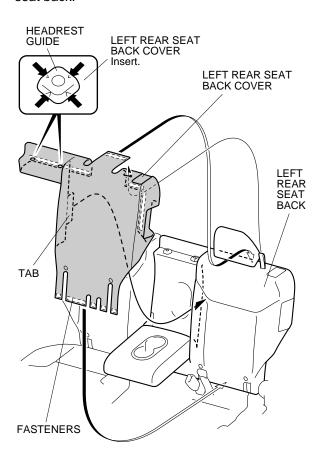


6. Install the left rear seat cushion cover over the left rear seat cushion. Secure the fasteners to the left rear seat cushion.

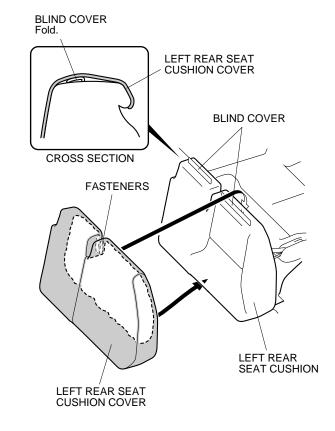


#### Installing the Armrest Cover

7. Install the armrest cover over the armrest. Insert the armrest cover under the beverage holder.




8. Raise the armrest. Pull the armrest cover between the armrest and left rear seat back, and secure the fasteners on the armrest cover as shown.




9. Secure the fastener to the bottom of the left rear seat back. Return the left rear seat cushion to its original position. Reinstall the center headrest.

Installing the Right Rear Seat Cover


10. Pull the lever, and fold the right rear seat cushion forward.

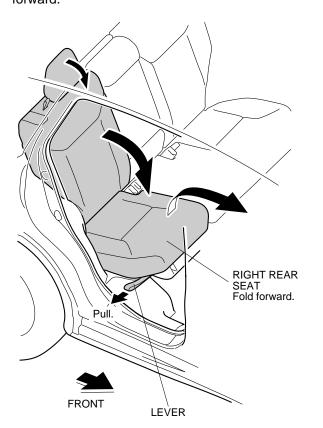


11. Raise the right rear seat back and headrest.

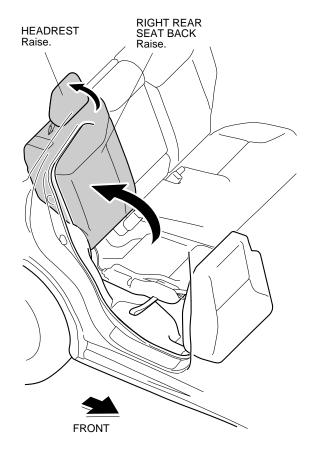

12. Install the right rear seat back cover over the right rear seat back. Secure the fasteners to the right rear seat back.

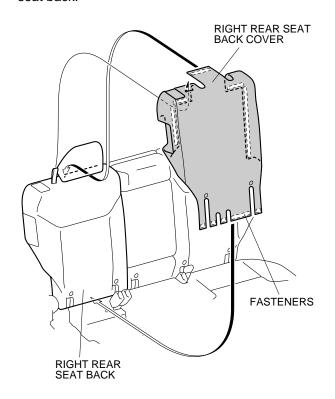

13. Install the right rear seat cushion cover over the right rear seat cushion.

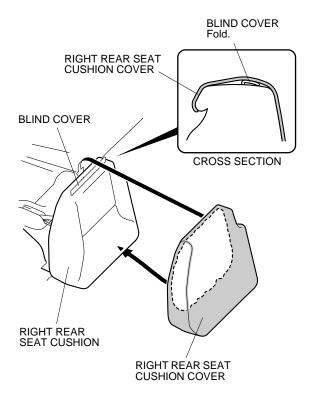

14. Return the right rear seat cushion to its original position.