




# INSTALLATION INSTRUCTIONS

Accessory	Application	Publications No.
SELECT KNOB	2007 FIT (A/T)	All 31714
		Issue Date
		MAR 2006

## PARTS LIST

Select knob

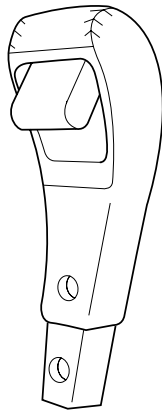


## TOOL REQUIRED


Phillips screwdriver

## INSTALLATION

1. Remove the two screws. Remove the select knob by pulling it upward while pulling up on the select switch in the direction shown.

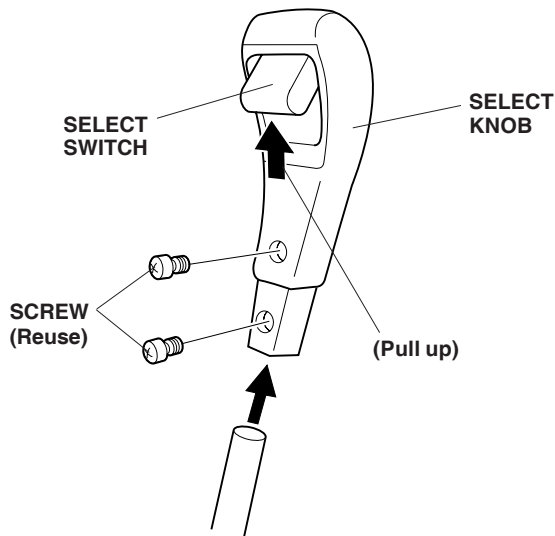

2. Get the new select knob from the kit and slide it onto the select rod while pulling up on the select switch in the direction shown.

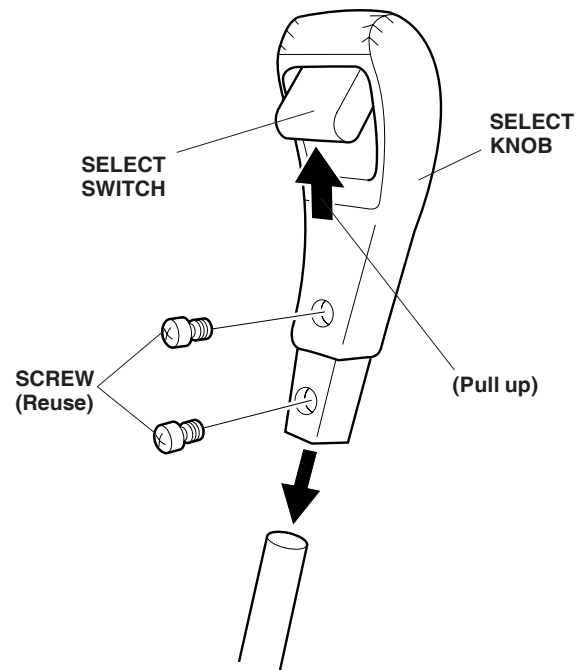

3. Reinstall the two screws.