



INSTALLATION INSTRUCTIONS


Accessory	Application	Publications No.
AUTOMATIC DAY/NIGHT MIRROR	2010 ODYSSEY	All 41817
		Issue Date
		JUNE 2009

PARTS LIST

Automatic Day/Night Mirror Kit
P/N 08V03-S9A-100B




Automatic Day/Night Mirror Attachment Kit
P/N 08V03-SHJ-101

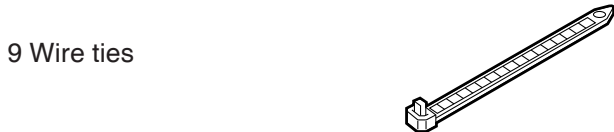

TOOLS AND SUPPLIES REQUIRED

- Phillips screwdriver
- Flat-tip screwdriver
- 8 mm Socket
- Ratchet
- T20 Torx bit
- Isopropyl alcohol
- Shop towel
- Clip remover

Illustration of the Day/Night Mirror Installed on the Vehicle

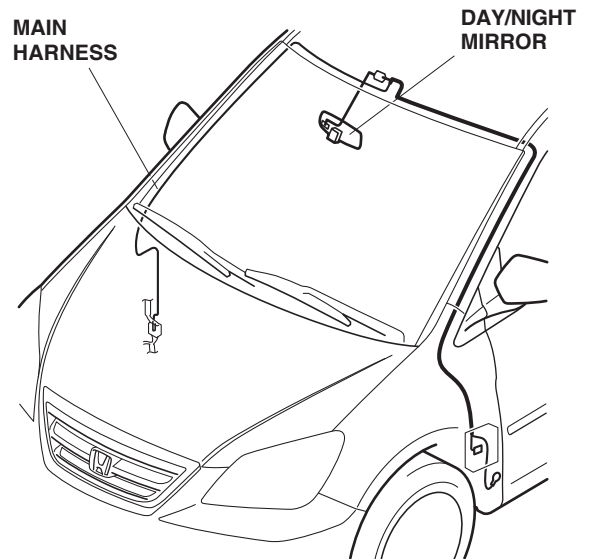


INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

1. Make sure you have the anti-theft code for the radio, then write down the radio station presets.
2. Disconnect the negative cable from the battery.

- Remove the mirror by lifting it up out of the mirror base.

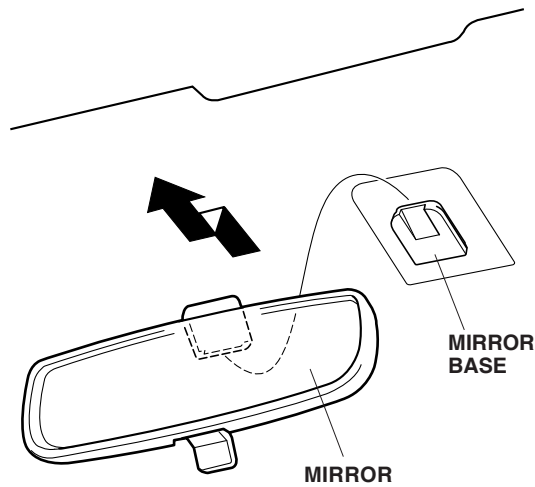


- Remove the right and left map light lenses (four tabs for each lens).
- Remove the two 5 mm bolts and two ground bolts, and pull out the roof console.

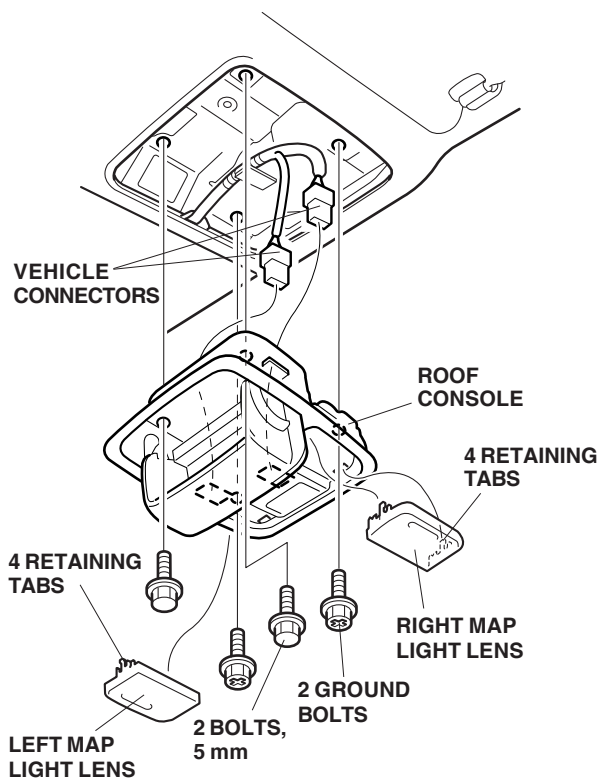


- Disconnect the two vehicle connectors, and remove the roof console.

- Remove the two retaining tabs, and remove the cover from the left sunvisor.

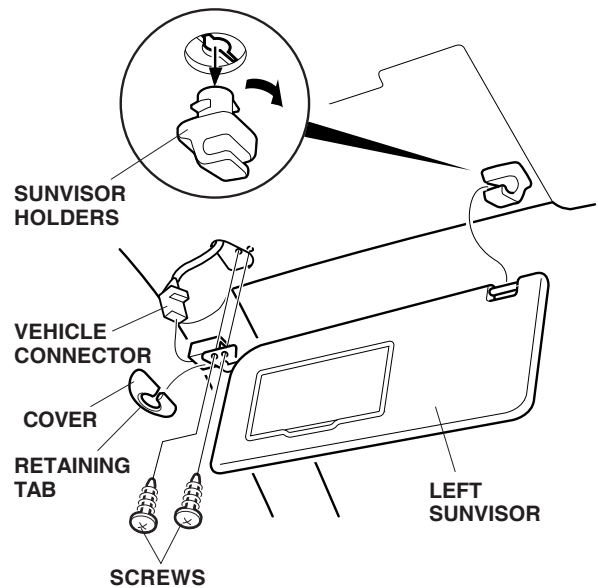

- Remove the two screws, pull out the left sunvisor, disconnect the vehicle connector, and remove the sunvisor.
- Repeat steps 7 and 8 to remove the right sunvisor.
- Remove the right and left sunvisor holders.
- Remove the door seal from around the left A pillar trim. Release the side curtain air bag clip and remove the left A pillar trim (two clips).

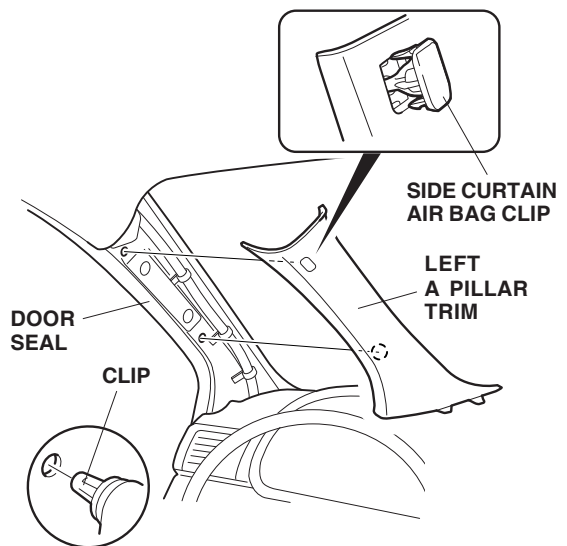

- Remove the right front A pillar trim the same way.

