



HONDA INSTALLATION INSTRUCTIONS

Accessory
DOOR MIRROR COVERS
P/N08R06-TG7-100

Application
2019 PASSPORT

Publications No.
VERSION 2
Issue Date
MAY 2019

PARTS LIST

Left door mirror cover



Right door mirror cover



TOOLS AND SUPPLIES REQUIRED

10 mm Open end wrench

Needle nose pliers

Ratchet

T15 TORX bit

Tape

Shop towel

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

Trim Tool Set (T/N SOJATP2014)

Illustration of the Door Mirror Covers on the Vehicle

RIGHT DOOR
MIRROR COVER



QE31406AG



INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE: Be careful not to damage the vehicle.


1. Disconnect the negative cable:
 - Wrap a shop towel around the hood latch.

HOOD LATCH
(Wrap with a shop towel.)

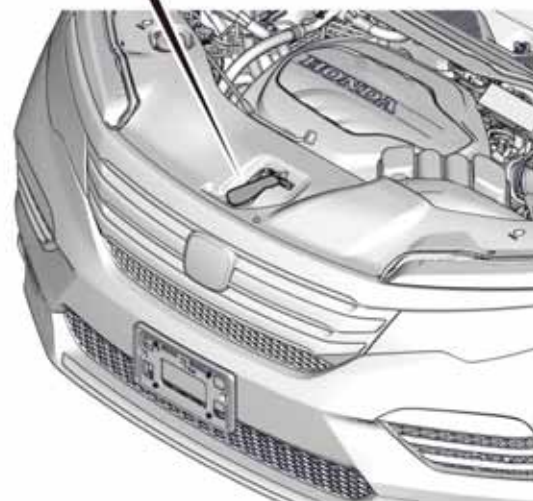


QDN1301AA


- Remove the front bulkhead cover.

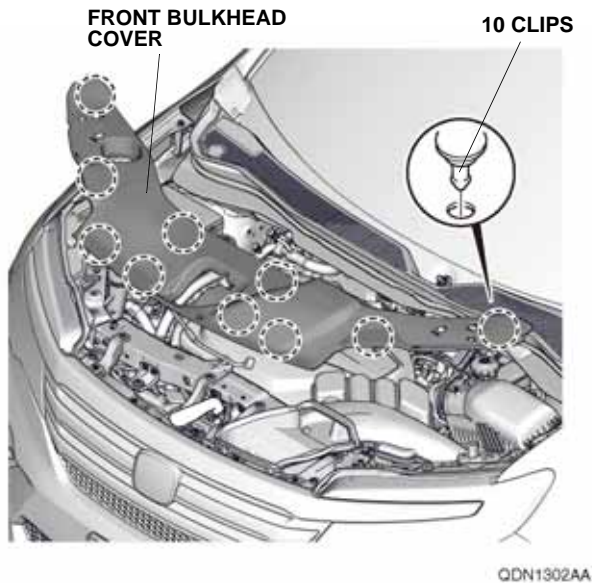


- Remove the intake air tube.
- Disconnect the negative cable from the battery.

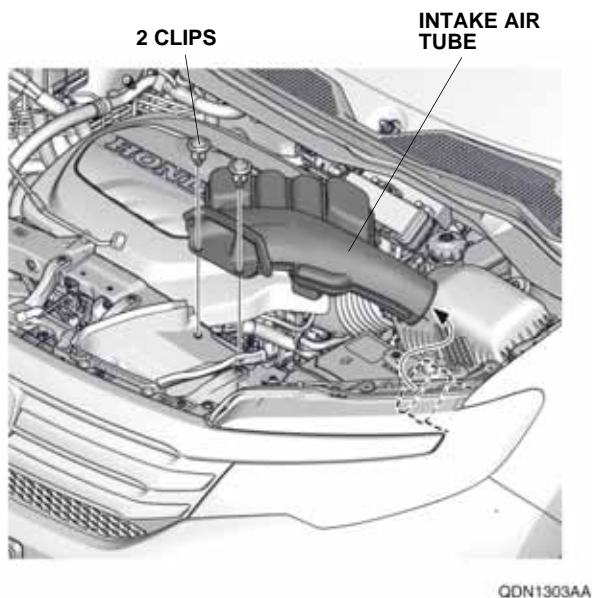


- Insert the shop towel between the mirror holder and the door mirror visor to protect the vehicle as shown.

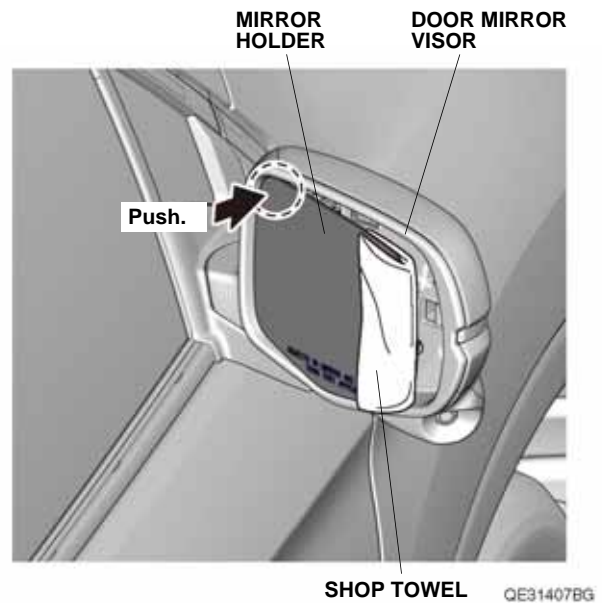


- Remove the mirror holder, and unplug the vehicle connectors.

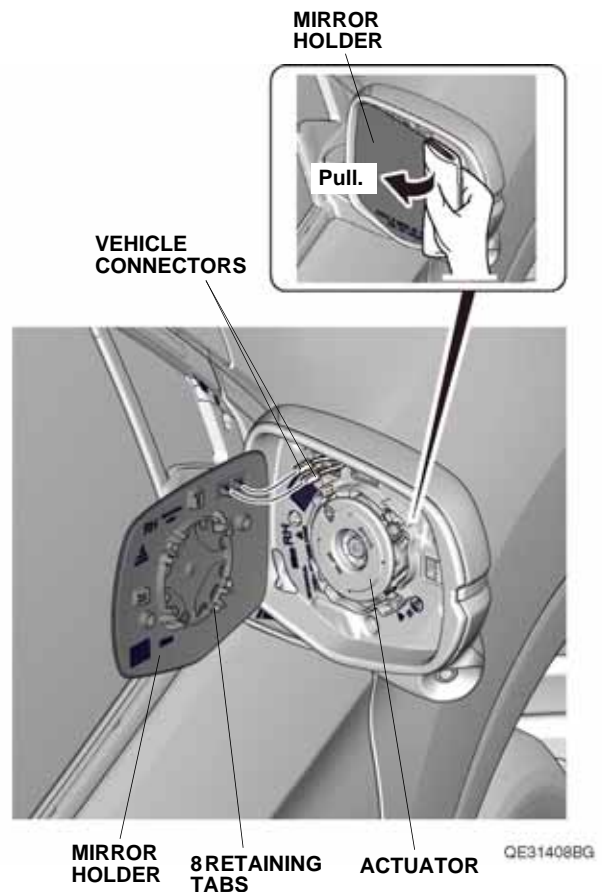


4. Remove the door mirror visor.

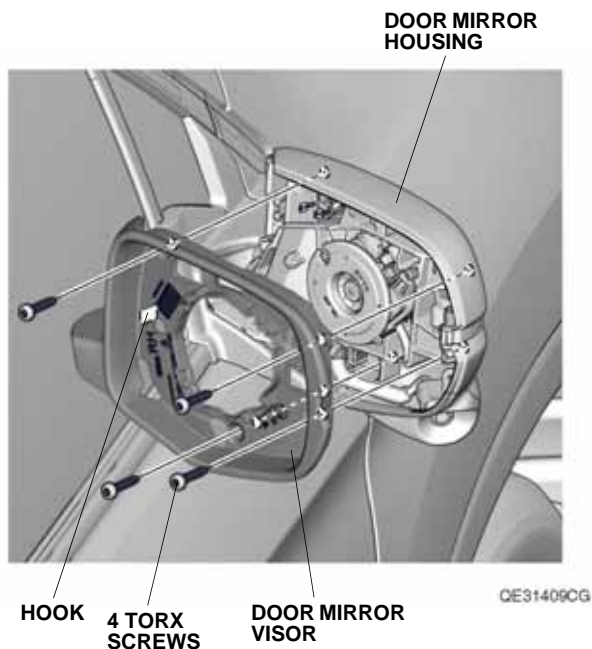


5. Using needle nose pliers wrapped with tape, remove the door mirror housing, and unplug the vehicle connectors.

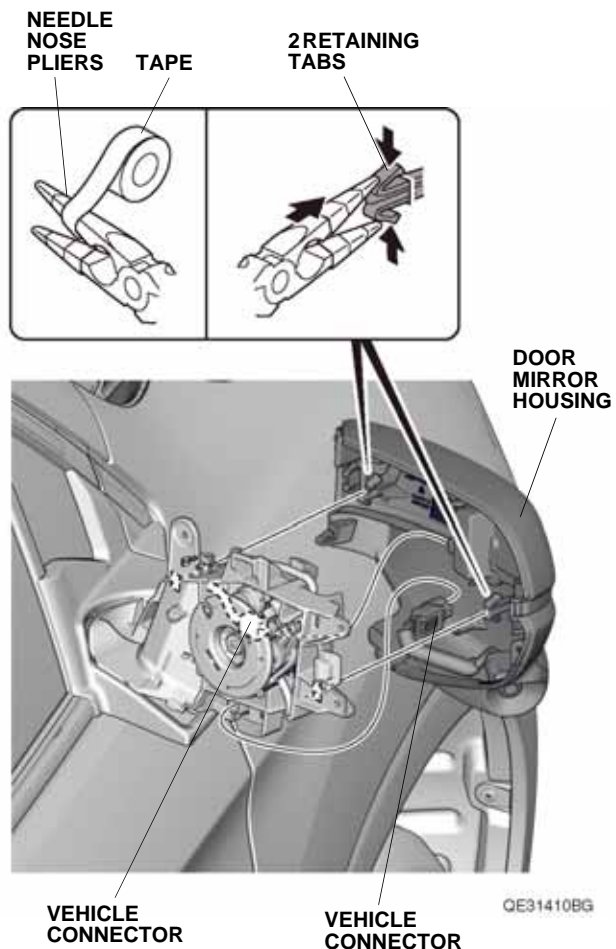


6. Remove one TORX screw from the turn signal light.

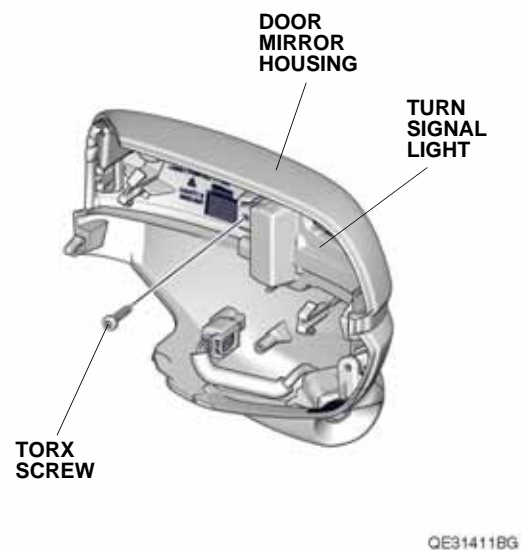


7. Using needle nose pliers, remove the door mirror upper housing.

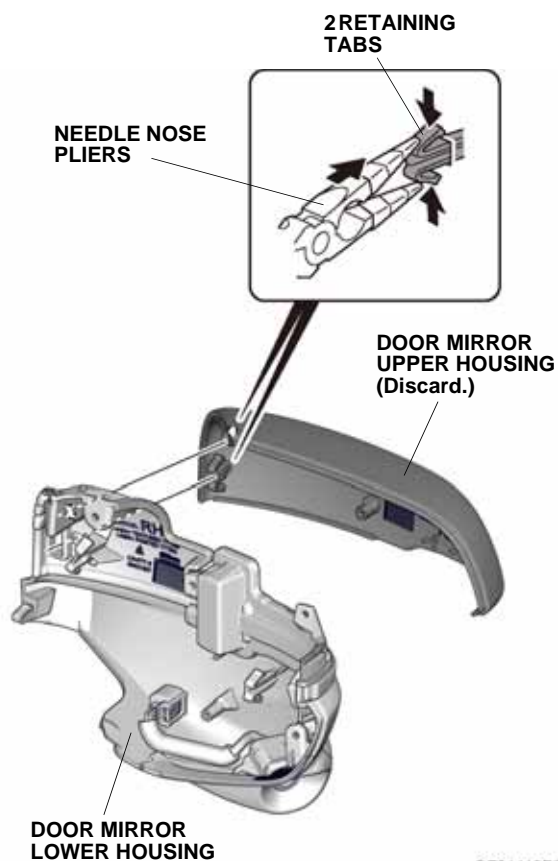


8. Install the right door mirror cover to the door mirror lower housing.

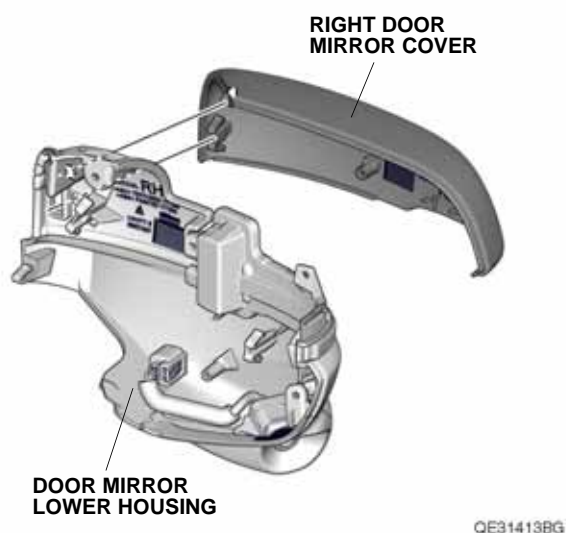

9. Secure the right door mirror cover with one TORX screw removed in step 6.

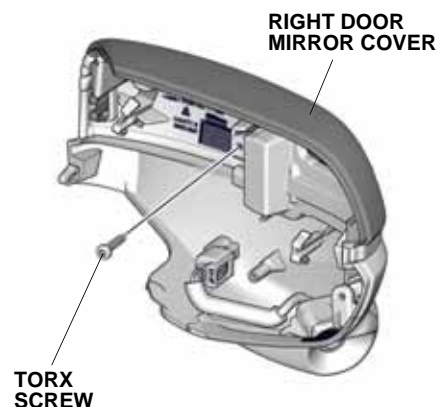


10. Plug the vehicle connectors.

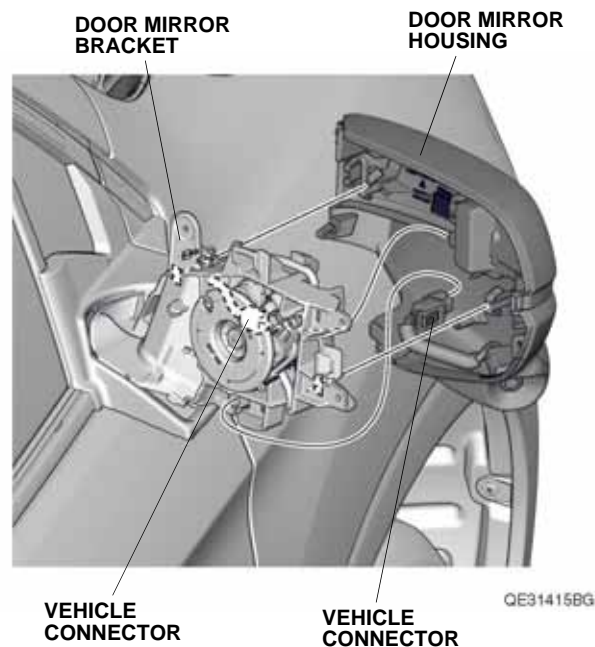


11. Install the door mirror housing to the door mirror bracket.

12. Install the door mirror visor with four TORX screws removed in step 4 and one hook.

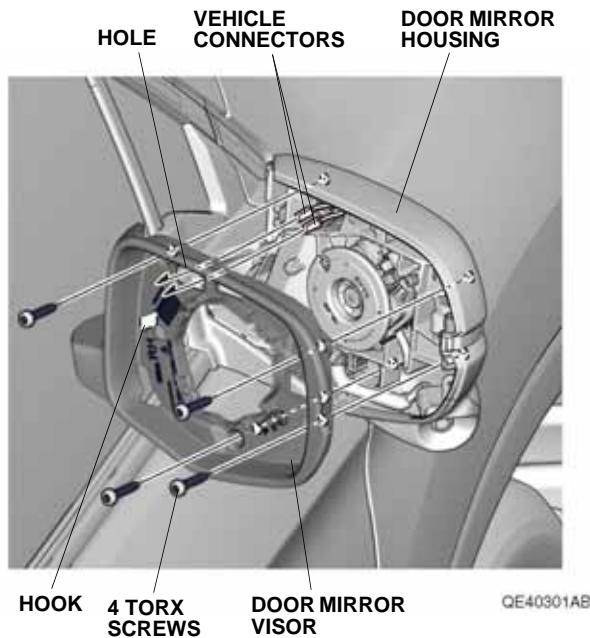


13. Plug the vehicle connectors to the mirror holder.

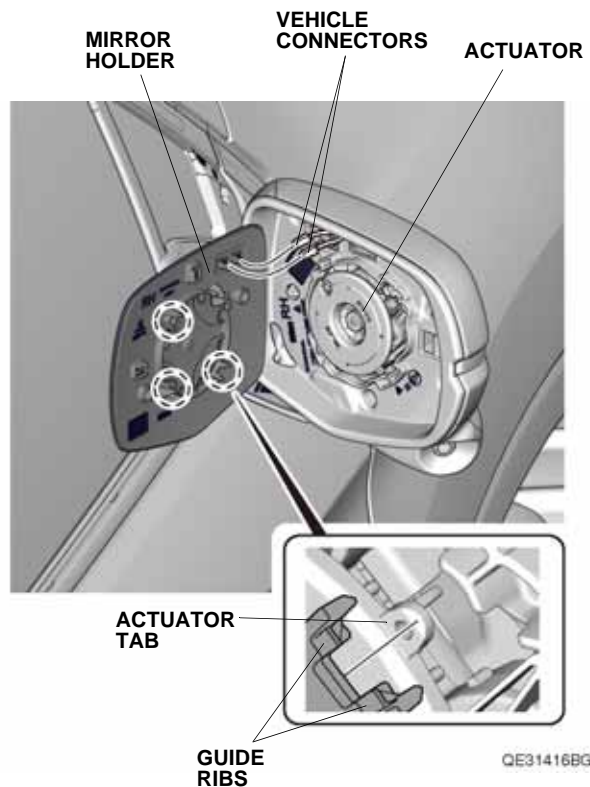

14. Line up the guide ribs on the mirror holder so they line up on each side of the actuator tabs. Install the mirror holder to the actuator.

15. Move the mirror holder in all directions to check if it is installed securely.

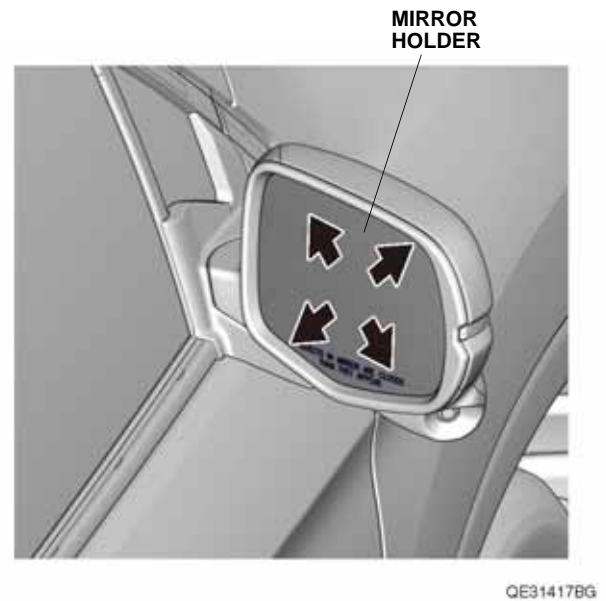

16. Repeat steps 2 through 15 to install the left door mirror cover on the left side of vehicle.
17. Connect the negative cable to the battery.
18. Install the front bulkhead cover and the intake air tube.
19. Press and hold the radio power button for 2 seconds to restore the radio and navi (if equipped) system functions.
20. Set the clock on vehicle without navigation.
21. If necessary, restore the systems back to normal operation as described in the service information.