



## INSTALLATION INSTRUCTIONS

### Accessory

FULL NOSE MASK  
P/N 08P35-SZA-100A

### Application

2012 PILOT

### Publications No.

All 46383

### Issue Date


AUG 2011

Put this information in the glove box with the vehicle owner's manual.


**NOTE:** The full nose mask cannot be installed on vehicle equipped with a hood air deflector or fender trims.

### PARTS LIST


Mask  
(hood section)



Mask  
(bumper section)



Storage bag




### TOOLS AND SUPPLIES REQUIRED

Utility knife

Scissors

### Illustration of the Full Nose Mask Installed on the Vehicle

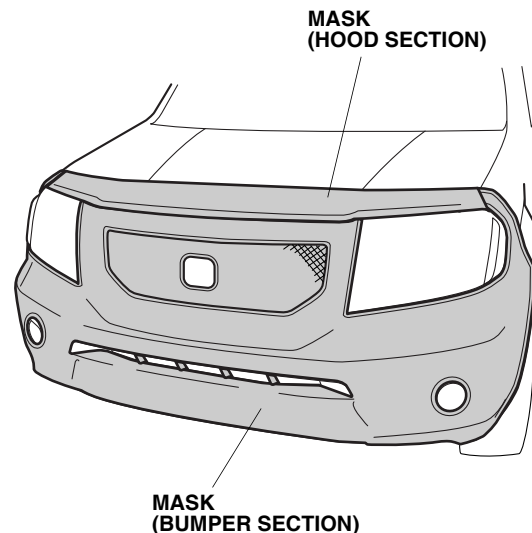

### INSTALLATION

**Customer Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."


### NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Make sure the hood and nose of the vehicle have been waxed with a high-quality paste wax.
- Make sure to install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull to the side of the road, stop the vehicle, and secure or remove the mask.

## Displaying the Front License Plate


If your state law requires the display of both license plates, cut out the piece of the bumper section that covers the front license plate:

- Face the inside of the mask toward you.
- Carefully cut out the license plate section with scissors at the top seam, and remove the overcast stitching.

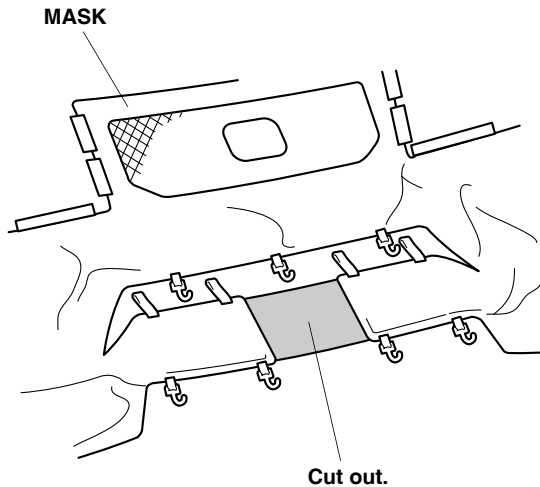

## Installing with the Front Corner Sensors


If the vehicle is equipped with the front corner sensors, cut out the front corner sensors position on the right and left bumper sections using a utility knife.

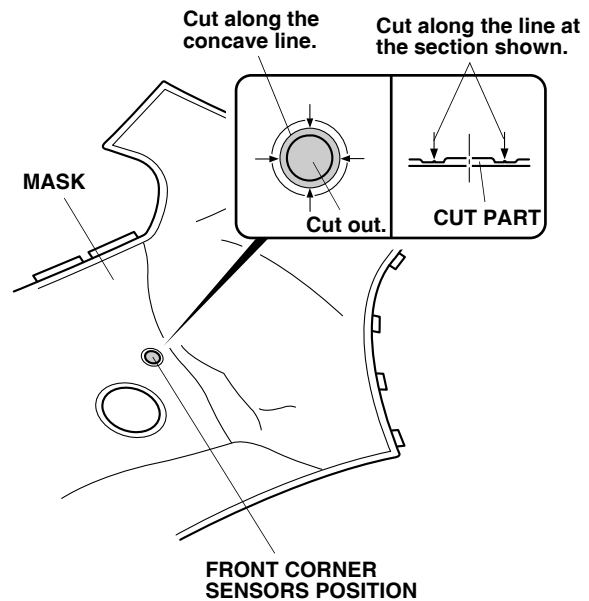

## Installing with the Fog Lights


If the vehicle is equipped with the fog lights, cut out the piece of the bumper section that covers the fog lights:

- Face the inside of the mask toward you.
- Carefully cut out the right and left fog light section of the mask with scissors at the top seam, and remove the overcast stitching.

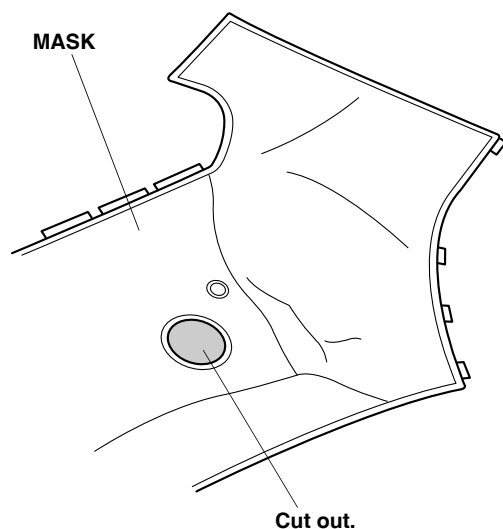


## Installing the Hood Section

1. Open the hood. Fit the corners of the mask around the hood. Adjust the mask so that it fits smoothly over the edges. Attach the hooks to the hood. Remove / install the hooks by inserting your finger into the belt of each hook.

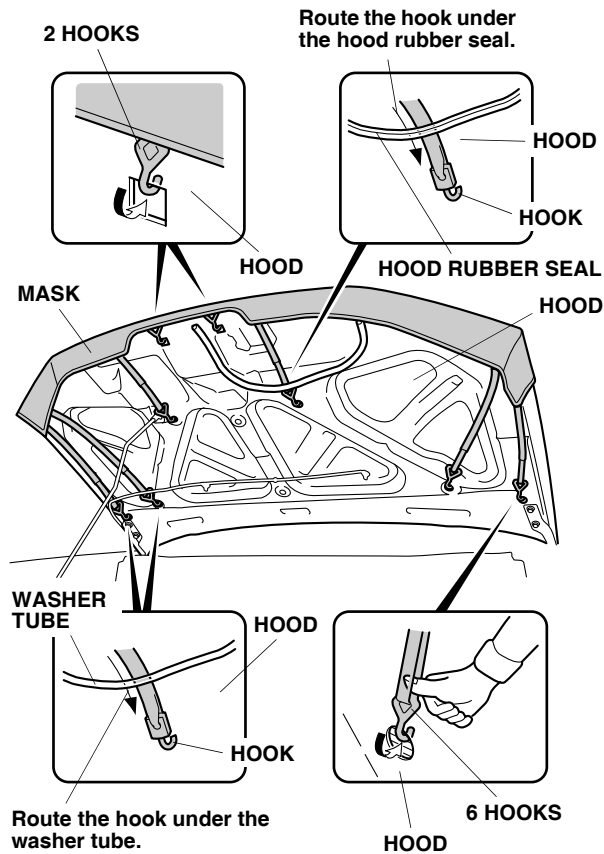


## Installing the Bumper Section


2. Slip the pocket of mask onto the front corner of the left front fender.

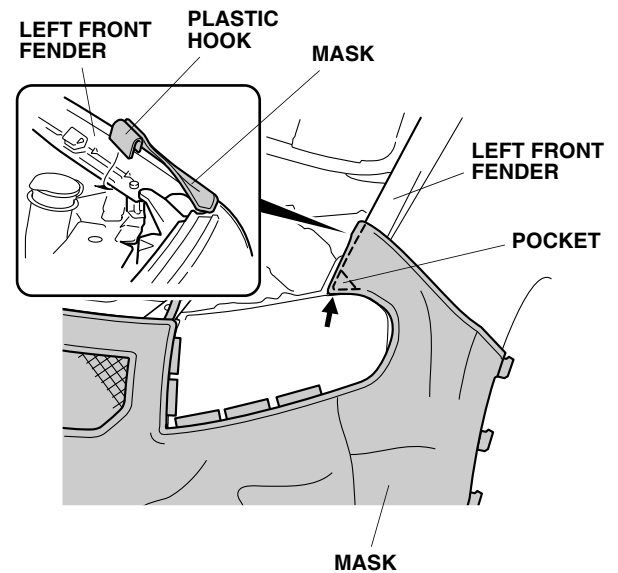


3. Attach the plastic hook from the mask to the left front fender. Repeat steps 2 and 3 on the right side.
4. On each side, attach the four plastic hooks to the fenderwell.

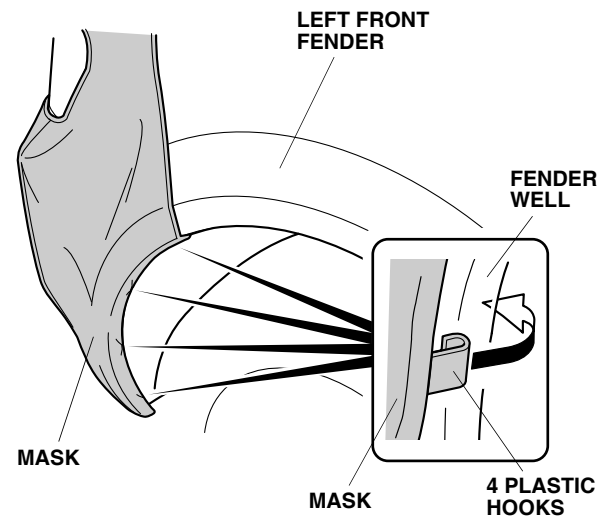


5. Insert the three tabs between the left headlight and the front bumper. Repeat on the right side.

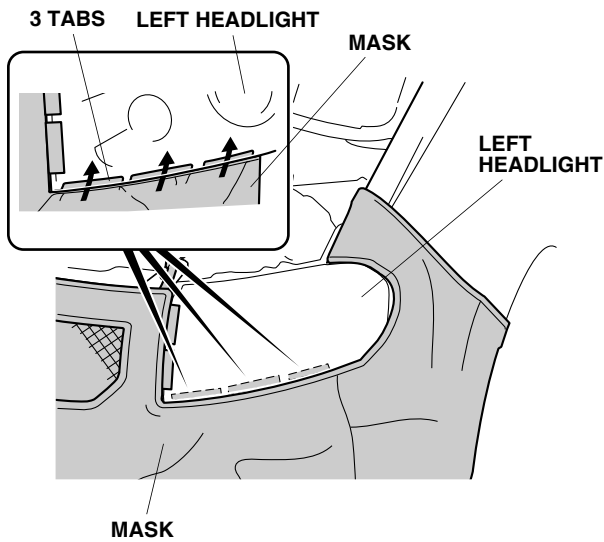


6. Attach the four hooks to the vehicle frame, front bulkhead cover, and front grille as shown.

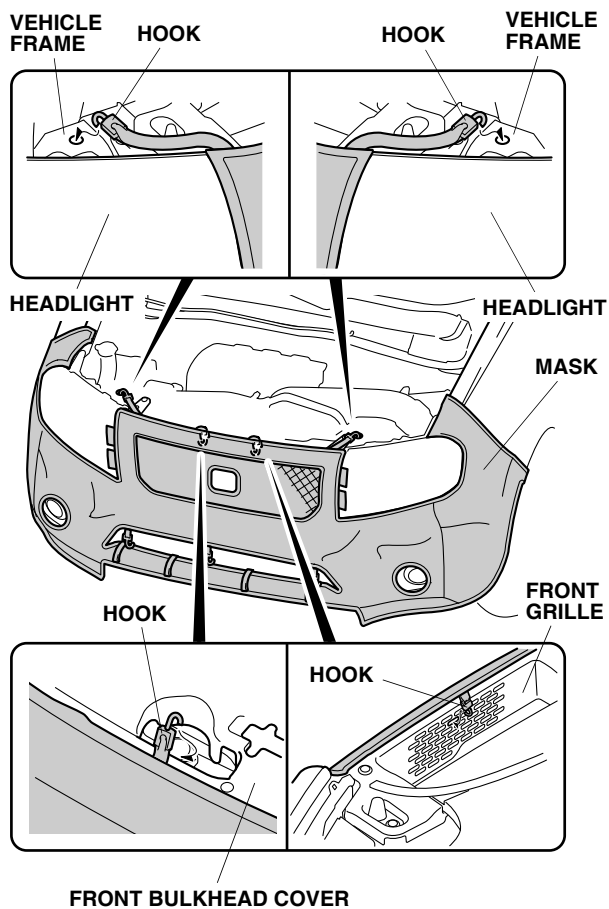


7. On each side, insert the two tabs between the front grille and the headlight.

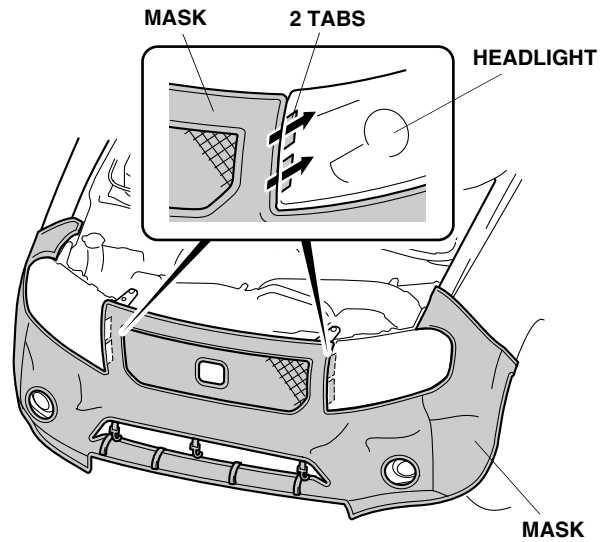


8. Attach the three hooks to the bottom inside edge of the front bumper as shown.

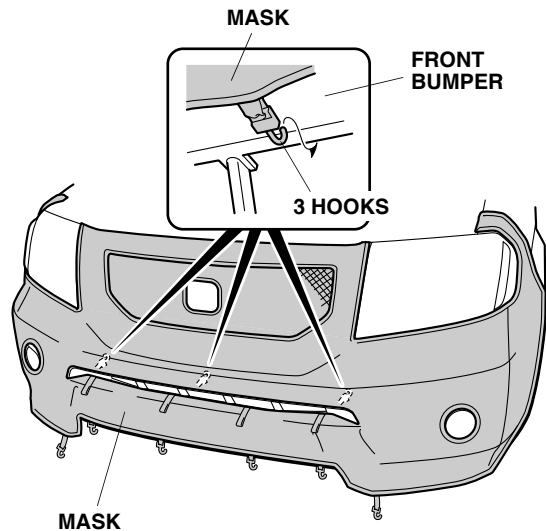

9. Route the four upper straps at the lower grille area into the front bumper, and attach the loops on the four upper straps to the hooks on the bottom of the mask.

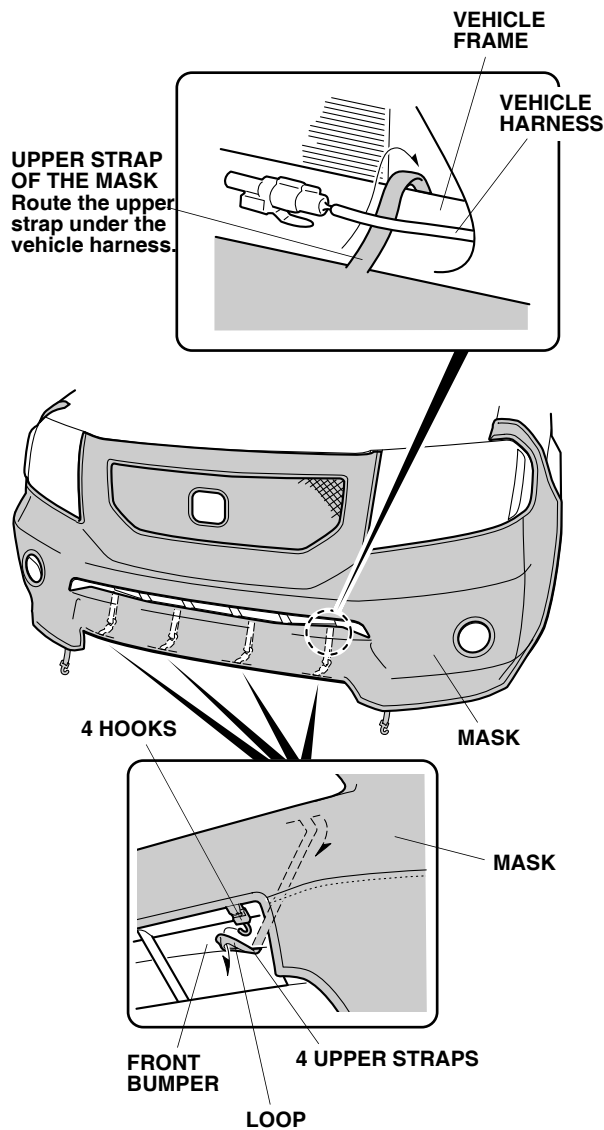

10. Attach the two plastic hooks to the bottom inside edge of the front bumper as shown.

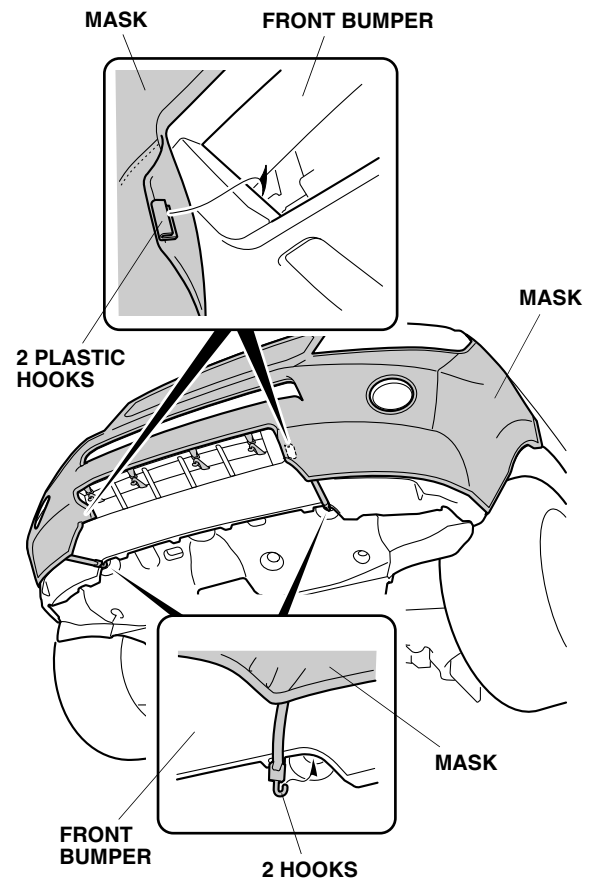

11. Attach the two hooks to the bottom edge of the front bumper as shown.

## CLEANING THE NOSE MASK

Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang it to dry out of direct sunlight. Make sure the mask is completely dry before you reinstall it.