www.collegehillshonda.com

INSTALLATION INSTRUCTIONS

CARGO COVER P/N 08U45-TG7-100

Accessory

Application

VERSION 1 2016 PILOT

Issue Date **JUN 2015**

Publications No.

PARTS LIST


Cargo cover



TOOLS AND SUPPLIES REQUIRED

Small flat-tip screwdriver

Illustration of the Cargo Cover in the Vehicle



INSTALLATION


NOTE: Be careful not to damage the body.

Pull each strap, and fold down the left and right third row seats.




www.collegehillshonda.com


 Using a small flat-tip screwdriver, remove the cover from the left and right rear side trim panels by releasing the retaining tabs. Save the covers in cargo compartment or glove box so they can be reinstalled when the cargo cover is removed.

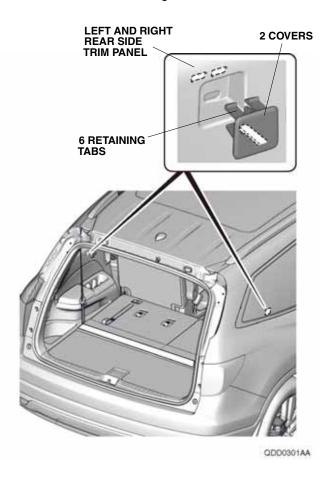

3. Install the cargo cover into the recess in the right rear side trim panel, then compress the cargo cover, and install it in the left rear side trim panel.




4. Attach each hook of the cargo cover to the headrestraint stay.

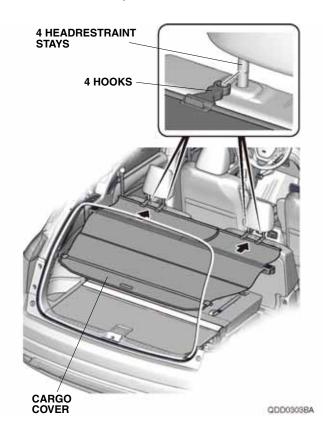

www.collegehillshonda.com

5. Attach each hook of the cargo cover to the left and right catches.

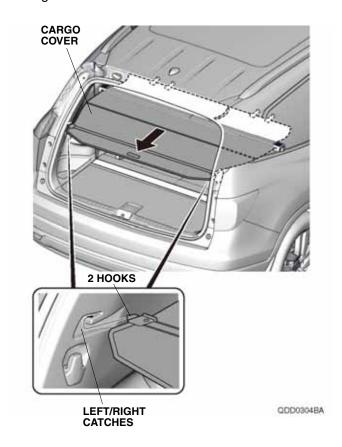

CLEANING THE CARGO COVER

Use a sponge or cloth and a solution of mild liquid dishwashing soap and water, then wipe dry with a clean cloth or sponge.