



HONDA INSTALLATION INSTRUCTIONS

Accessory
CROSS BARS
P/N 08L04-TG7-100

Application
2018 PILOT

Publications No.
VERSION 1
Issue Date
NOV 2018

PARTS LIST

Front cross bar (long)



Rear cross bar (short)



8 Bolts




TOOLS AND SUPPLIES REQUIRED

Ratchet

Torque wrench

T-30 TORX bit

Illustration of the Cross Bars on the Vehicle

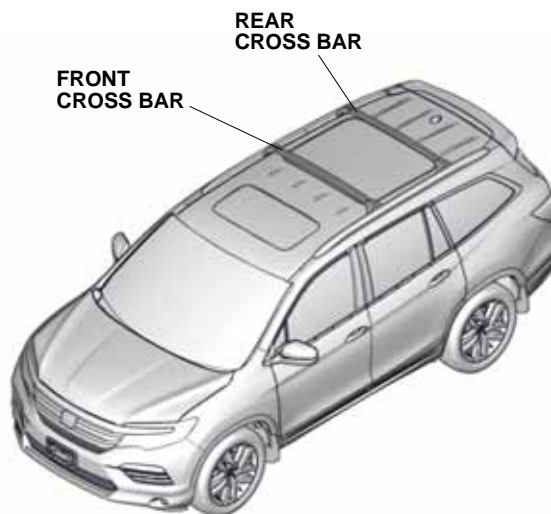


QDN1705AC

INSTALLATION


NOTE:

- The weight of the cargo must not exceed the maximum weight capacity of 75 kg (165 lbs).
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the cross bars.


1. Remove the four plastic screws from the left roof rail and the four plastic screws from the right roof rail.

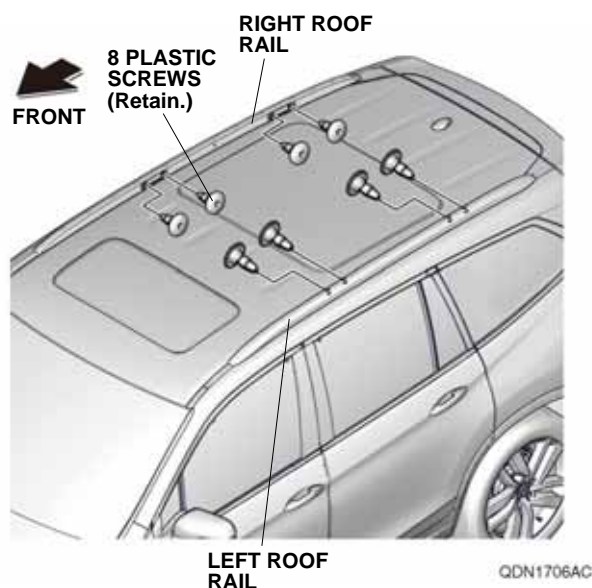

2. Install the front cross bar to the left roof rail and right roof rail with four bolts. Torque the bolts to 10 N·m (7.4 lb·ft).

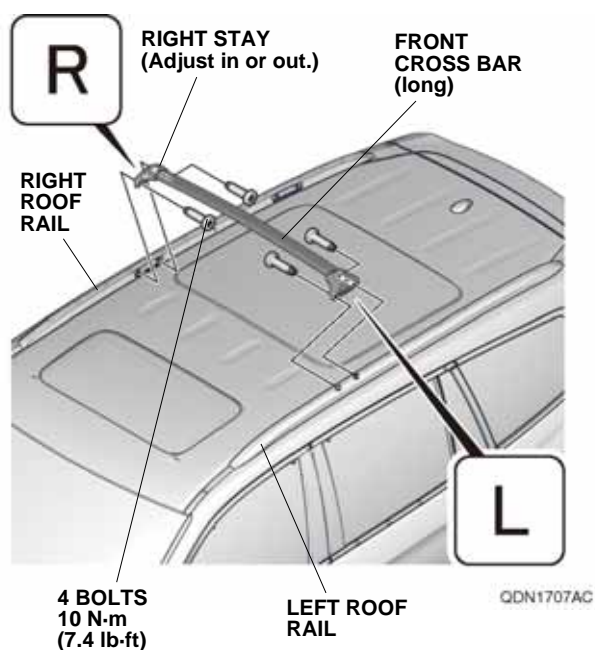

3. Install the rear cross bar to the left roof rail and right roof rail with four bolts. Torque the bolts to 10 N·m (7.4 lb·ft).

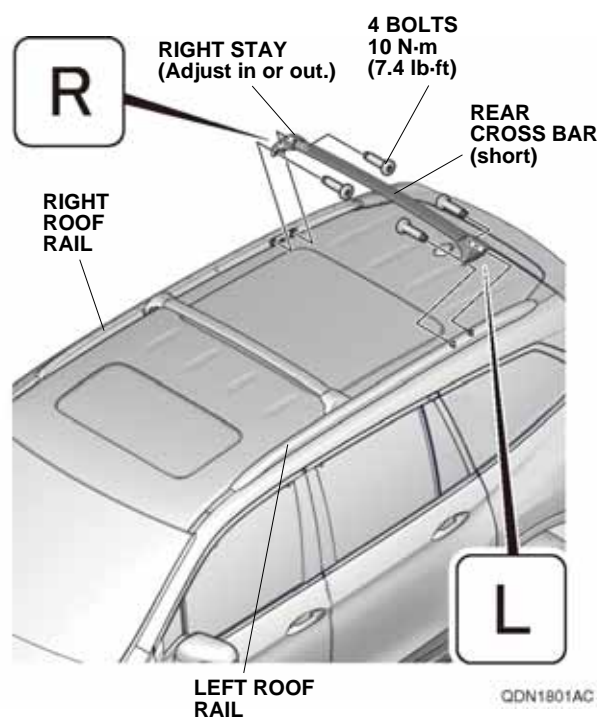

USE AND CARE

- Check the cross bar mounting bolts frequently, and retighten if necessary.
- Distribute the weight of the cargo evenly, and do not exceed the maximum weight capacity of 75 kg (165 lbs).