



HONDA INSTALLATION INSTRUCTIONS

Accessory
BLACK EMBLEM

Application
**2021 CIVIC
4 DOOR**

Publications No.
VERSION 1
Issue Date
SEP 2020

PARTS LIST

Front and Rear Emblem + Car Name Kit
P/N 08F20-TBA-100


Front H emblem



Rear H emblem




CIVIC emblem



4 Push nuts



3 Alcohol wipes




SPORT Emblem Kit
P/N 08F20-TBA-100C

SPORT emblem



Alcohol wipe



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Flat-tip screwdriver

10 mm Open end wrench

6 mm, 8 mm, and 10 mm Sockets

Ratchet

Torque wrench

Diagonal cutters

Masking tape

Blanket


Shop towel

String


The following tools are available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)
- Push Pin Pliers (T/N 07AAC-001A101)

Illustration of the Black Emblems Installed on the Vehicle

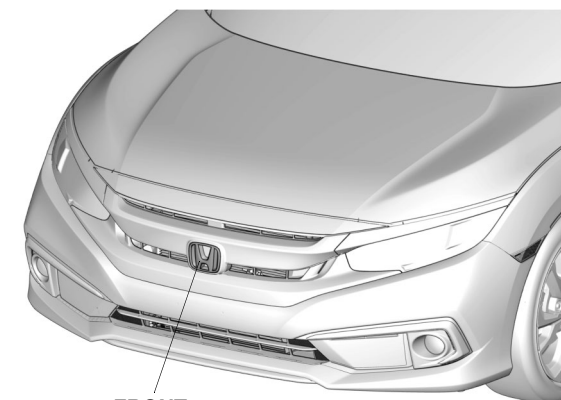

FRONT
H EMBLEM

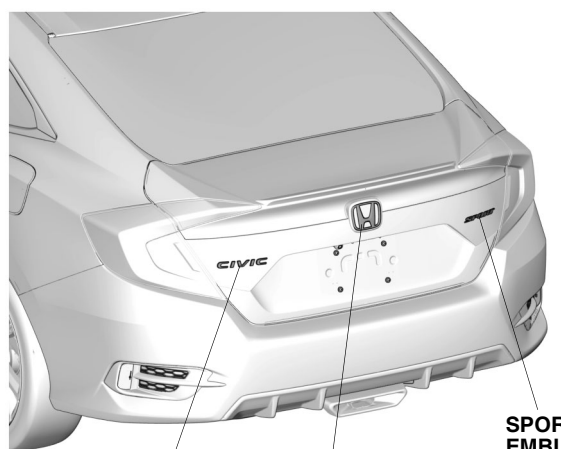

CIVIC
EMBLEM

REAR
H EMBLEM

SPORT
EMBLEM

QJD0201AT

INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:




- Be careful not to damage the body paint finish.
- This kit should be installed only if the ambient air temperature is 60°F (15°C) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Make sure the your customer is aware of this.

1. Disconnect the negative cable from the battery.

2. Remove the front bumper:

- Attach masking tape to the areas shown on each side.
- Wrap a shop towel around the hood latch.

HOOD LATCH
(Wrap with a shop towel.)

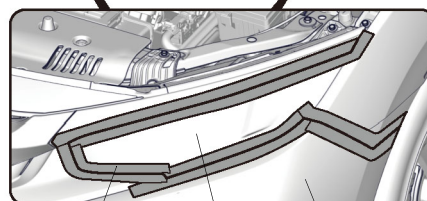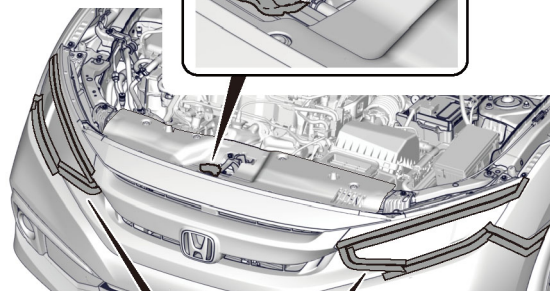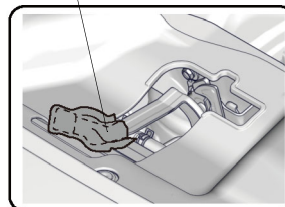


MASKING
TAPE

HEADLIGHT

FRONT
BUMPER

QH30201AR

- Remove the front bulkhead cover.

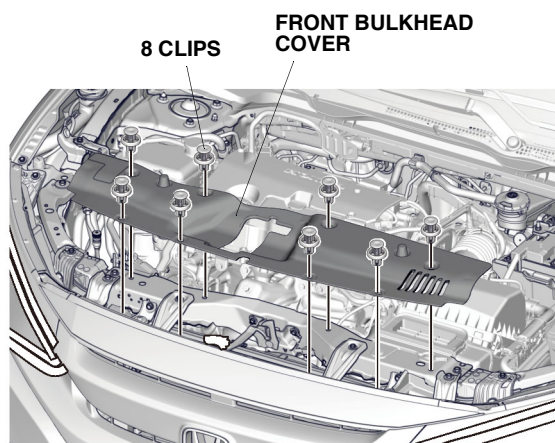


8 CLIPS

FRONT BULKHEAD
COVER

QH30202AR


- Remove the hood seal.

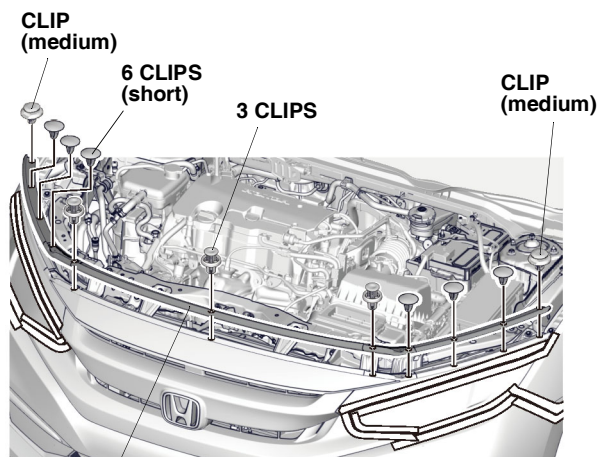

HOOD SEAL

QH30203AR


- Remove four self-tapping screws, two bolts, two hex bolts, and seven clips.

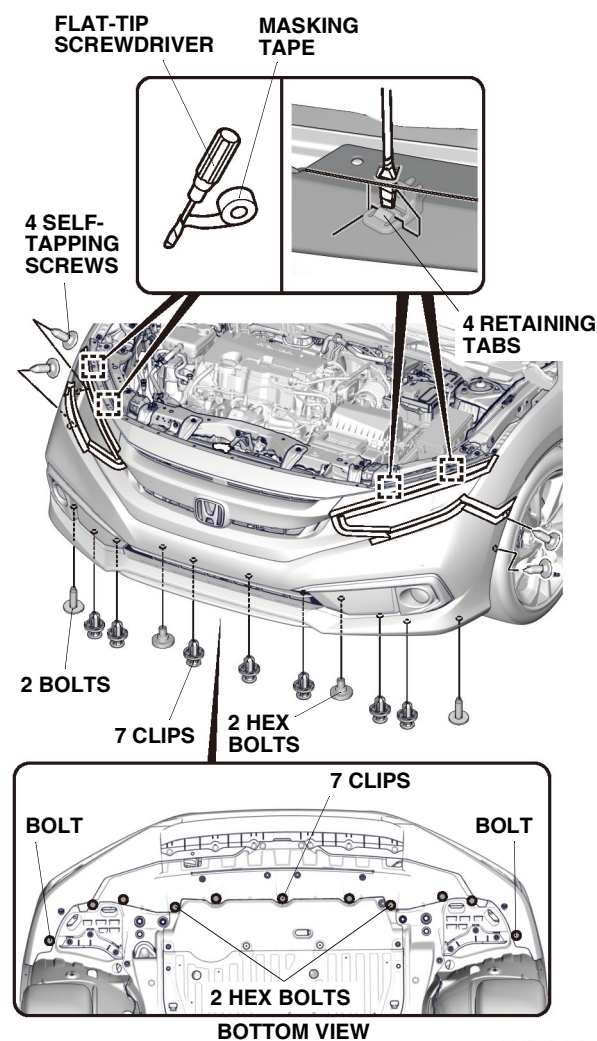

BOTTOM VIEW


QH30204AR

- With the help of an assistant, release seven retaining tabs on each side.
NOTE: Remove the retaining tabs in the direction and order shown.

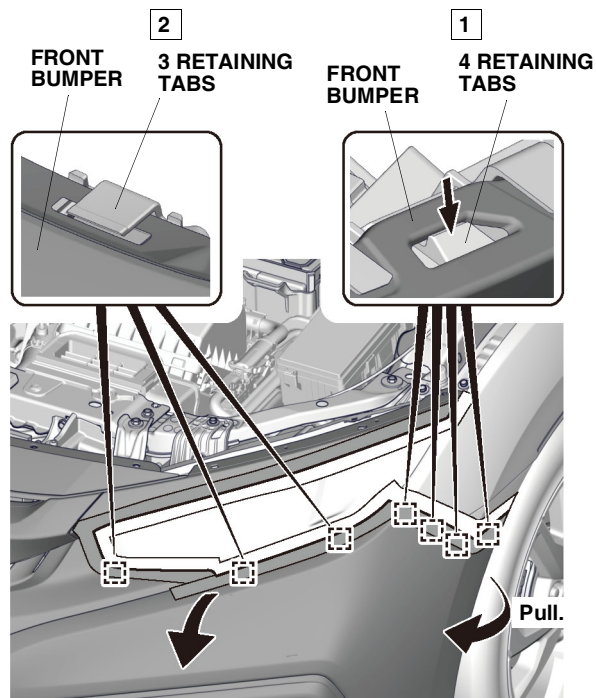


QH30205AR

- With the help of an assistant, remove the front bumper. Place the front bumper on a blanket to prevent damage.

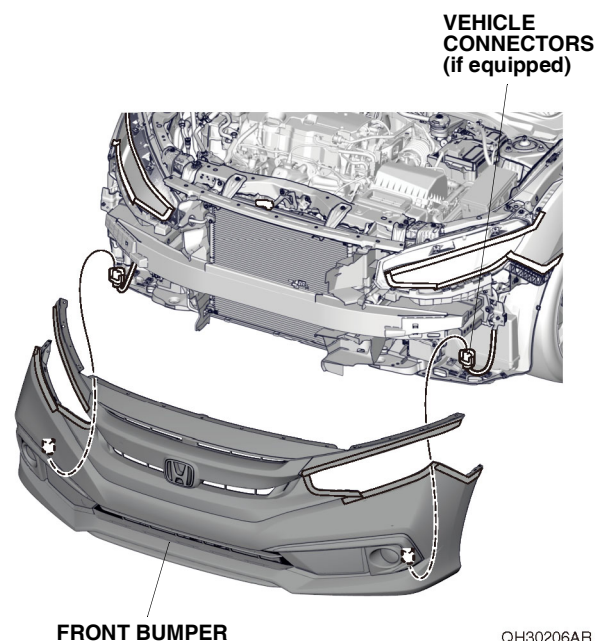


QH30206AR


3. Open the trunk lid. Remove the trunk lid trim panel.

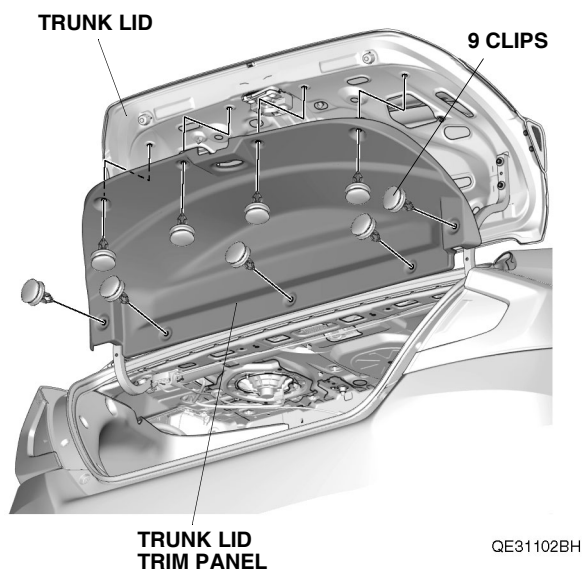

4. Remove the bolt from the trunk lid.

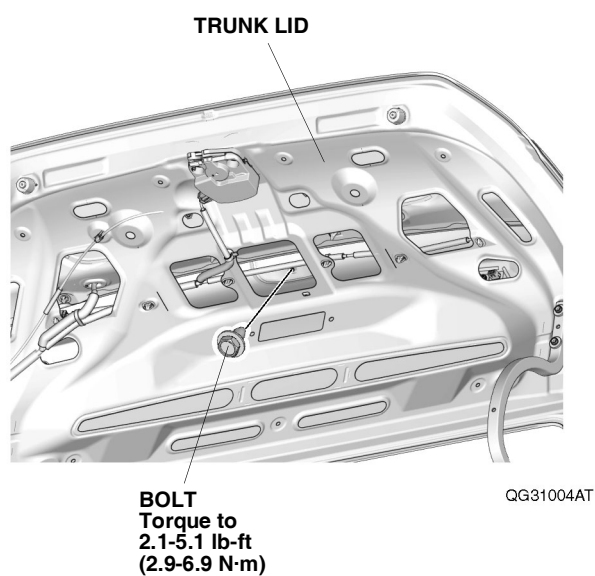


5. Release the clips and remove the rear license plate trim from the trunk lid.

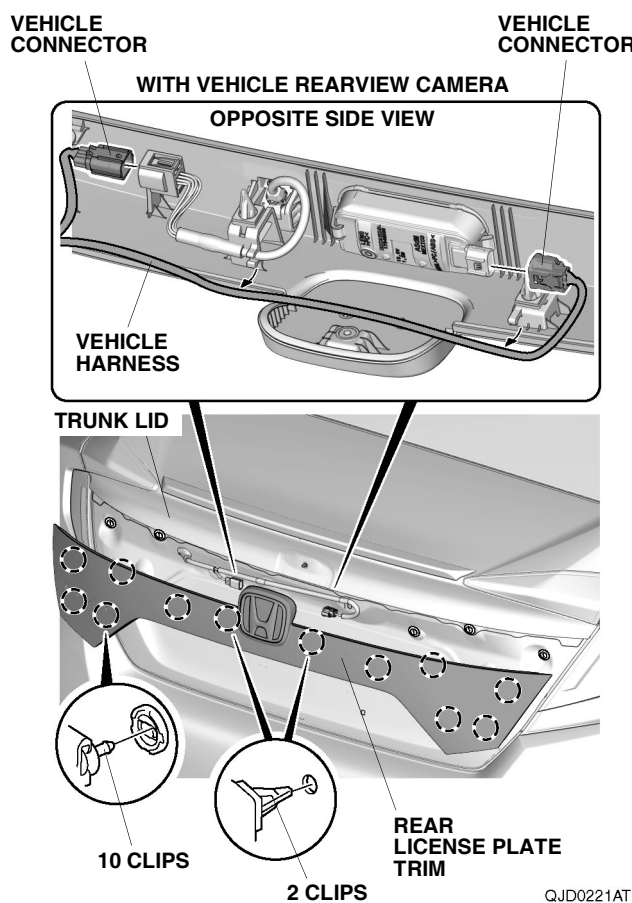


Installing the Black Emblems

6. Remove the front license plate base from the front bumper.

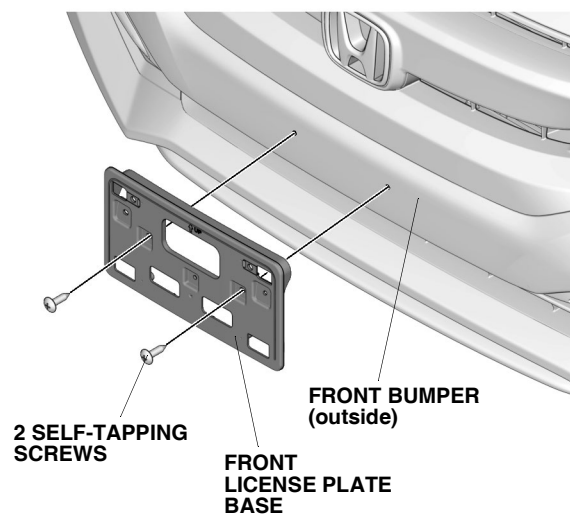


7. Remove the front grille from the front bumper.


Front Grille Type 1

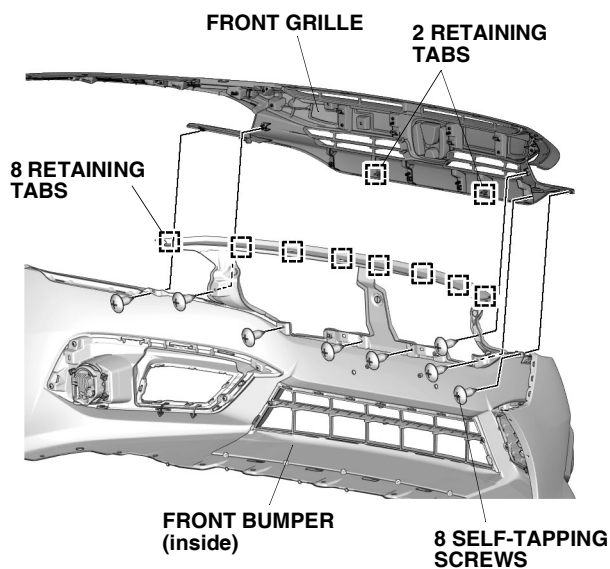


Front Grille Type 2

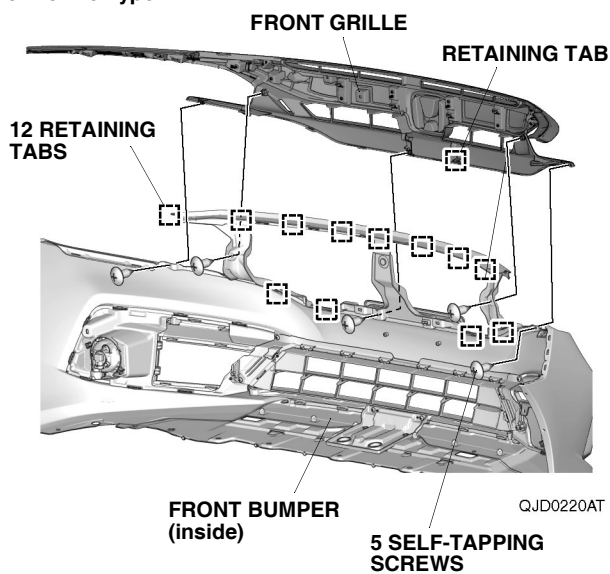

8. Remove the front H emblem from the front grille.

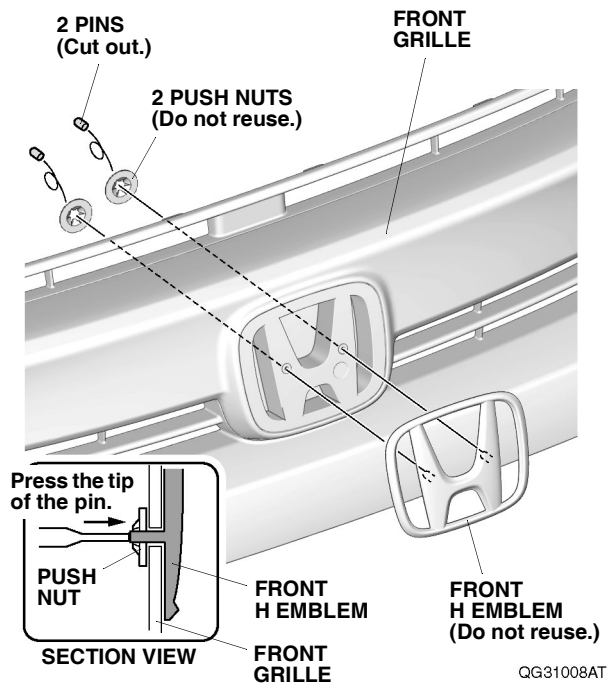


9. Using an alcohol wipe, thoroughly clean the front grille where the front H emblem will attach.

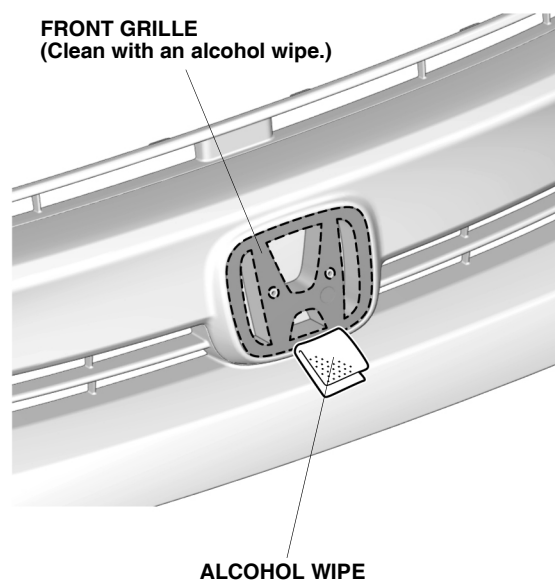


10. Remove the adhesive backings from the front H emblem. Install the front H emblem to the front grille as shown.

NOTE: Check the orientation of the push nuts.

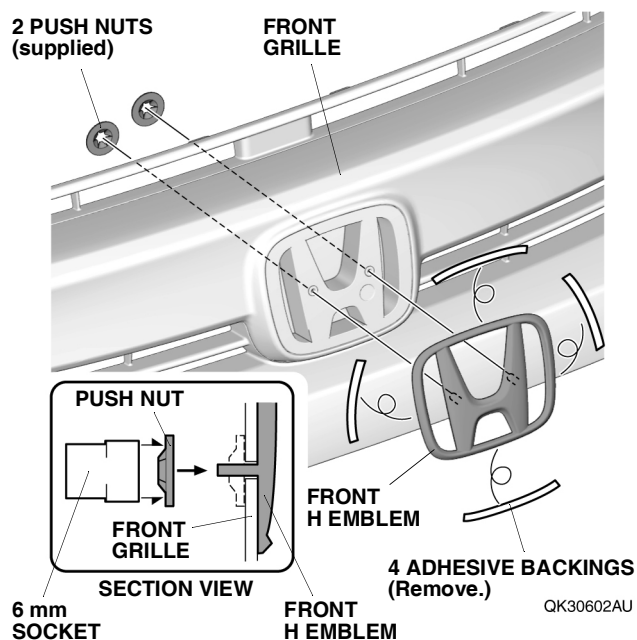

11. Using the palm of your hand, firmly press the front H emblem against the front grille.


12. Using a piece of string, remove the rear H emblem by cutting along the outer edges as shown. NOTE: Do not damage the rear license plate trim when removing the rear H emblem with the string.

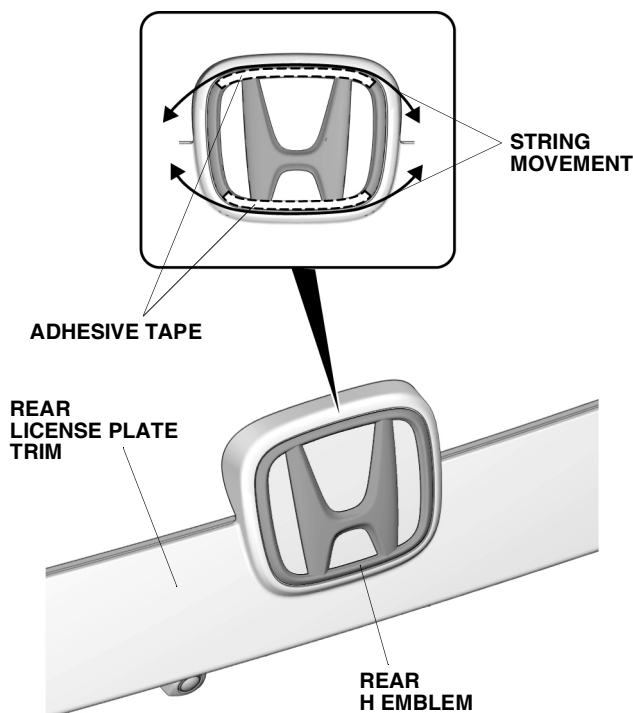


QK30604AU

13. Remove the rear H emblem from the rear license plate trim.

NOTE: Make sure to thoroughly remove the adhesive tape from the rear license plate trim.

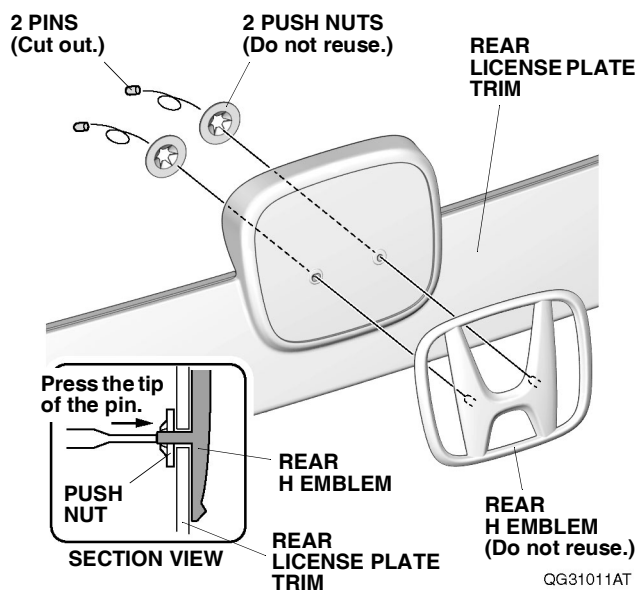


14. Using an alcohol wipe, thoroughly clean the rear license plate trim where the rear H emblem will attach.

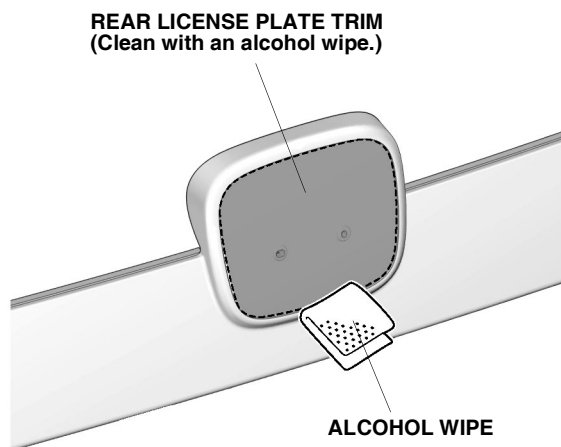

QJD0203AT


15. Remove the adhesive backings from the rear H emblem. Install the rear H emblem to the rear license plate trim as shown.
NOTE: Check the orientation of the push nuts.

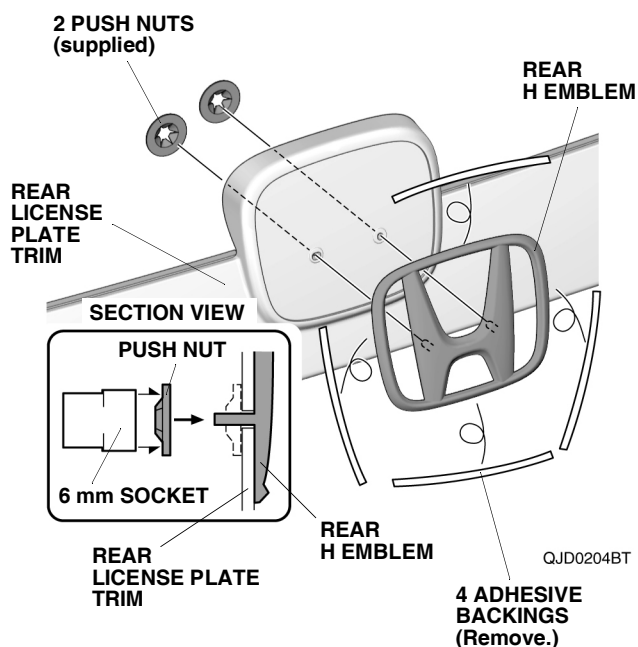

QJD0204BT


16. Using the palm of your hand, firmly press the rear H emblem against the rear license plate trim.

17. Remove the position film from the CIVIC emblem, then remove the CIVIC emblem from the guide form.

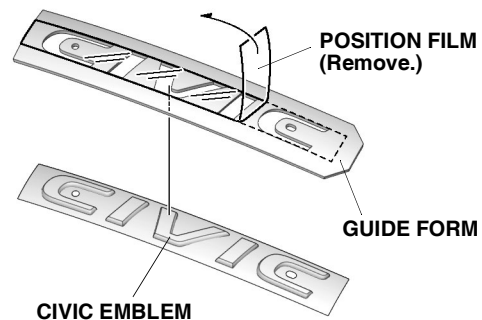


QJD0216AT

18. Install the guide form to the CIVIC emblem on the rear license plate trim.

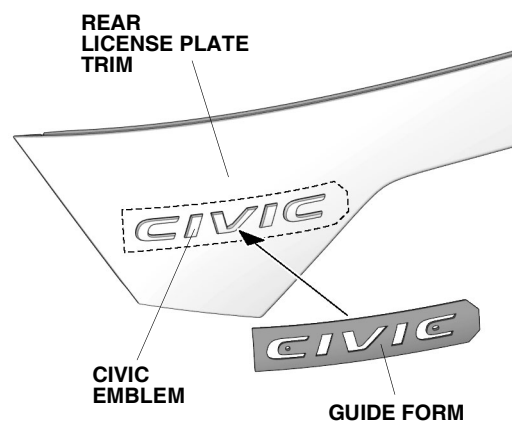


QG31014AT

19. Attach masking tape along the guide form as shown.

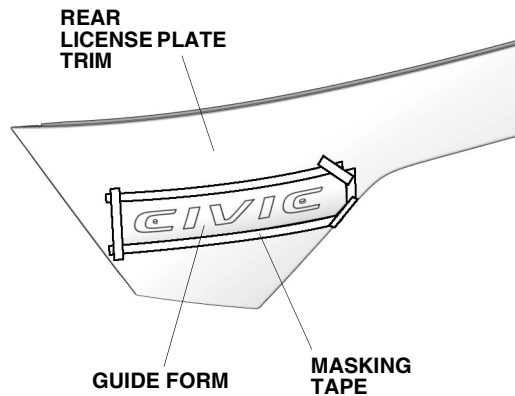

QJD0215AT

20. Remove the guide form from the rear license plate trim.

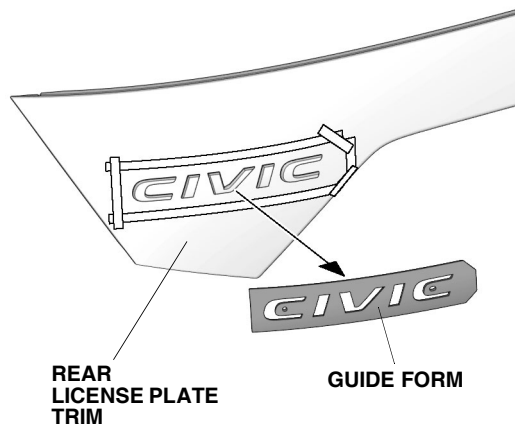


QG31016AT

21. Using a piece of string, remove the CIVIC emblem by cutting along the outer edges as shown.


NOTE:

- Do not damage the rear license plate trim when removing the CIVIC emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the rear license plate trim.

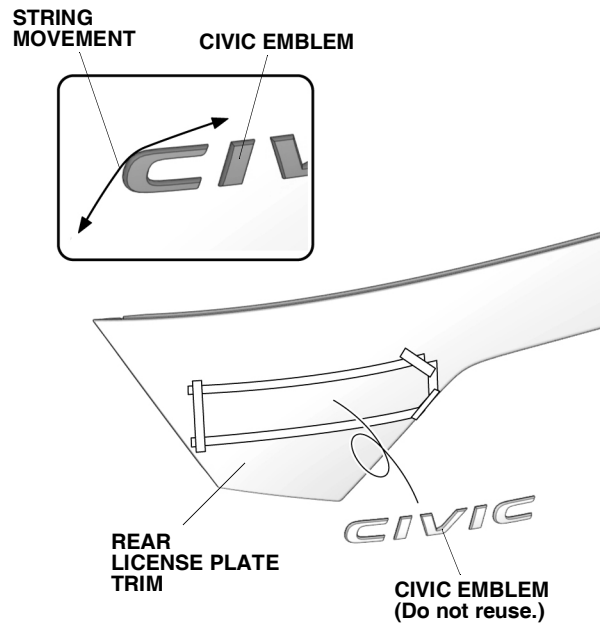


QK30603AU

22. Install the CIVIC emblem in the guide form, and temporarily secure it with masking tape.

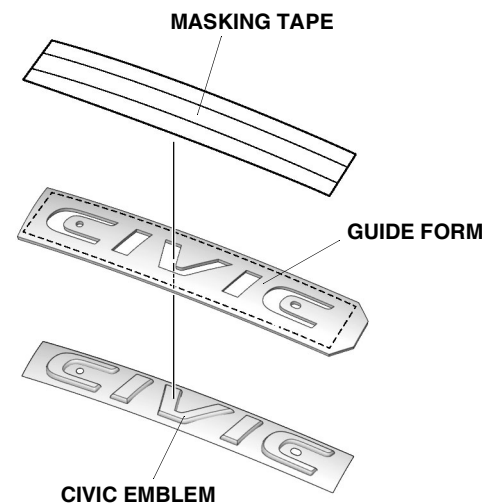


QJD0217AT


23. Using an alcohol wipe, thoroughly clean the rear license plate trim where the CIVIC emblem will attach.

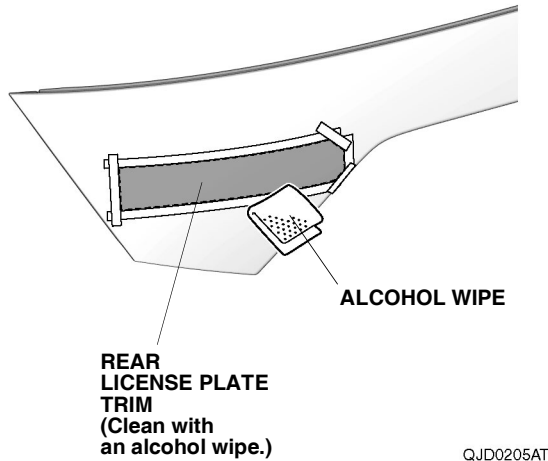

24. Remove the adhesive backing from the CIVIC emblem. Line up the guide form with masking tape, and attach the CIVIC emblem to the rear license plate trim.

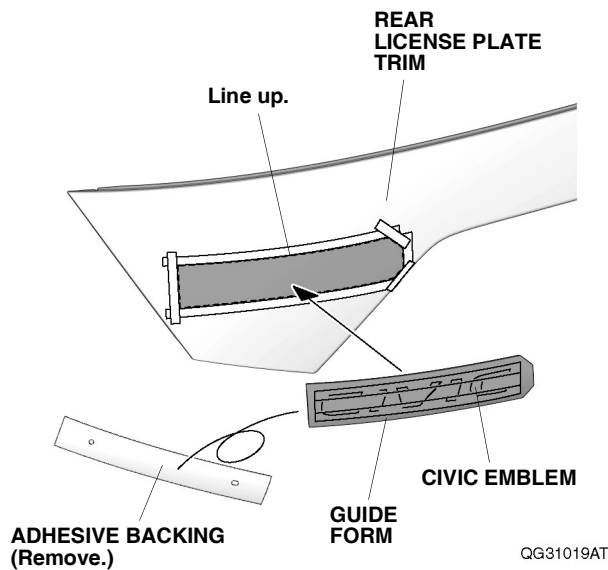


25. Remove the guide form and using the palm of your hand, firmly press the CIVIC emblem against the rear license plate trim.

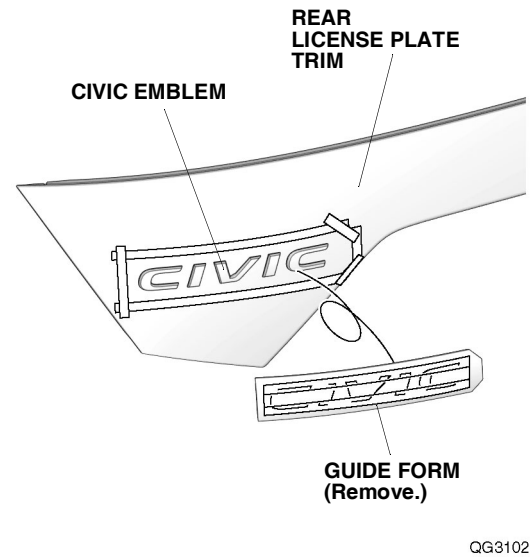


26. Remove the masking tape from the rear license plate trim.

If the vehicle is equipped with the SPORT emblem, continue with step 27; otherwise, go to step 37.

27. Remove the position film from the SPORT emblem, then remove the SPORT emblem from the guide form.

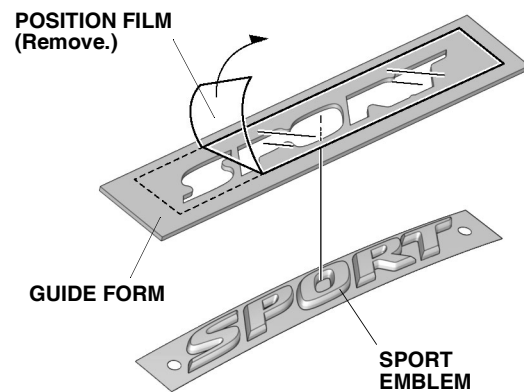


28. Install the guide form to the SPORT emblem on the rear license plate trim.

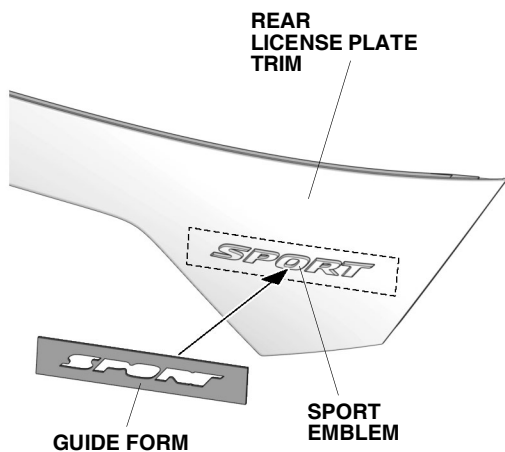


QJD0207AT

29. Attach masking tape along the guide form as shown.

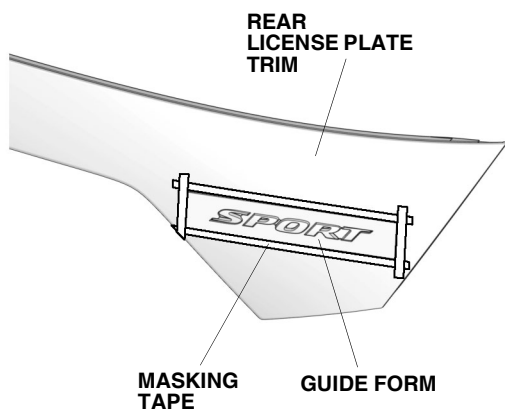

QJD0208AT

30. Remove the guide form from the rear license plate trim.

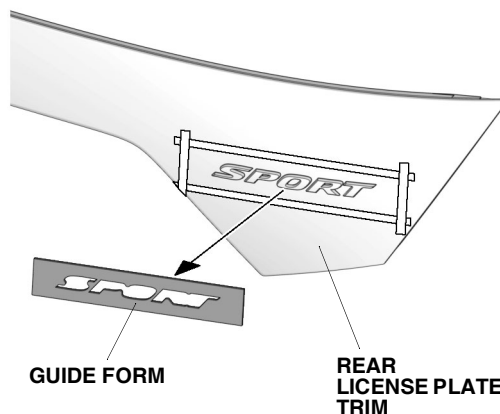


QJD0209AT

31. Using a piece of string, remove the SPORT emblem by cutting along the outer edges as shown.


NOTE:

- Do not damage the rear license plate trim when removing the SPORT emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the rear license plate trim.

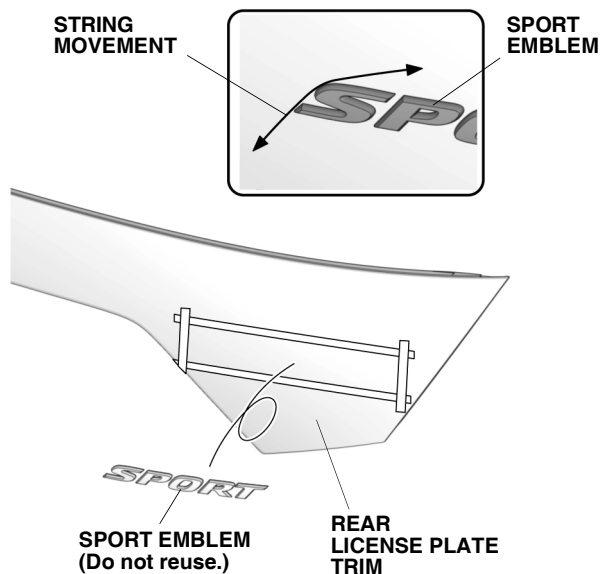


QJD0210BT


32. Install the SPORT emblem in the guide form, and temporarily secure it with masking tape.

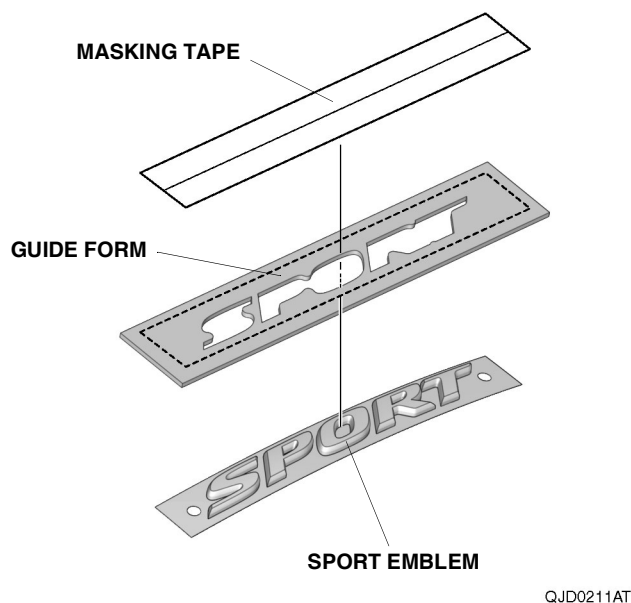


33. Using an alcohol wipe, thoroughly clean the rear license plate trim where the SPORT emblem will attach.

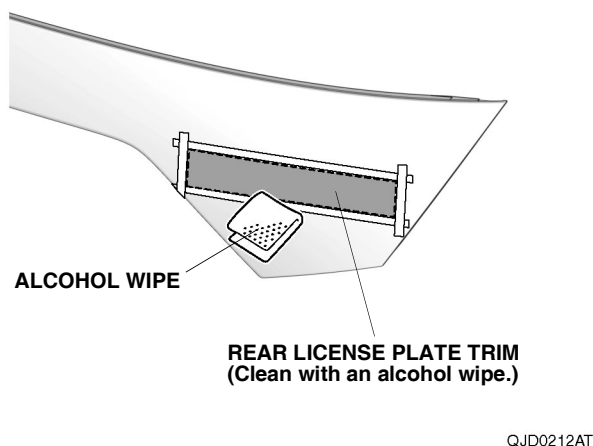

34. Remove the adhesive backing from the SPORT emblem. Line up the guide form with masking tape, and attach the SPORT emblem to the rear license plate trim.

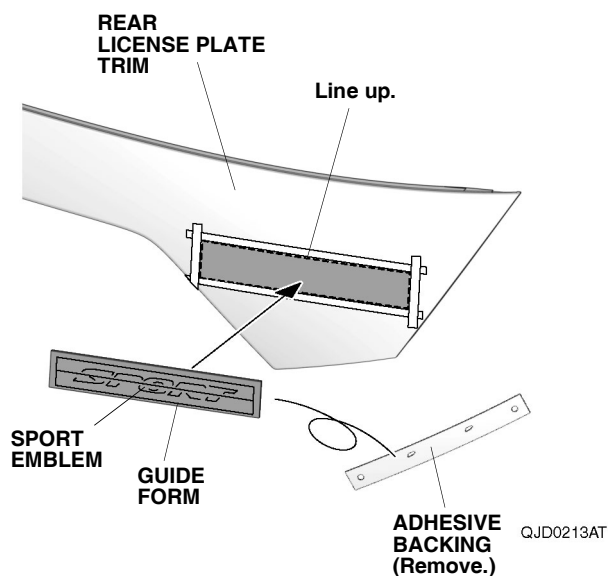

35. Remove the guide form and using the palm of your hand, firmly press the SPORT emblem against the rear license plate trim.

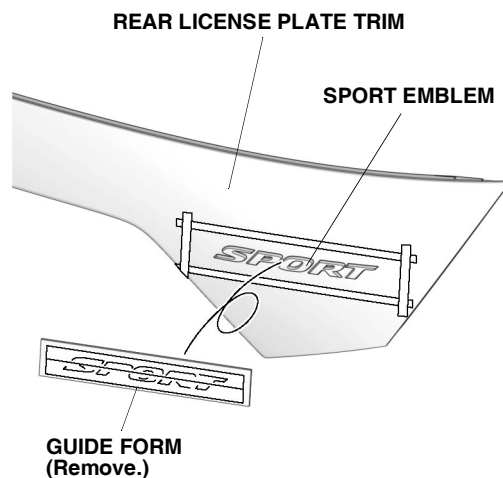

36. Remove the masking tape from the rear license plate trim.

37. Check that all wire harnesses are routed properly and all connectors are plugged in.
38. Install all removed parts.
39. Connect the negative cable to the battery.
40. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
41. Set the clock on vehicles without navigation.
42. If necessary, restore the systems back to normal operation as described in the service information.