




INSTALLATION INSTRUCTIONS

Accessory
DOOR VISORS

Application
2022 CIVIC

Publications No.
All
Issue Date
JUN 2021

GENERAL VIEW

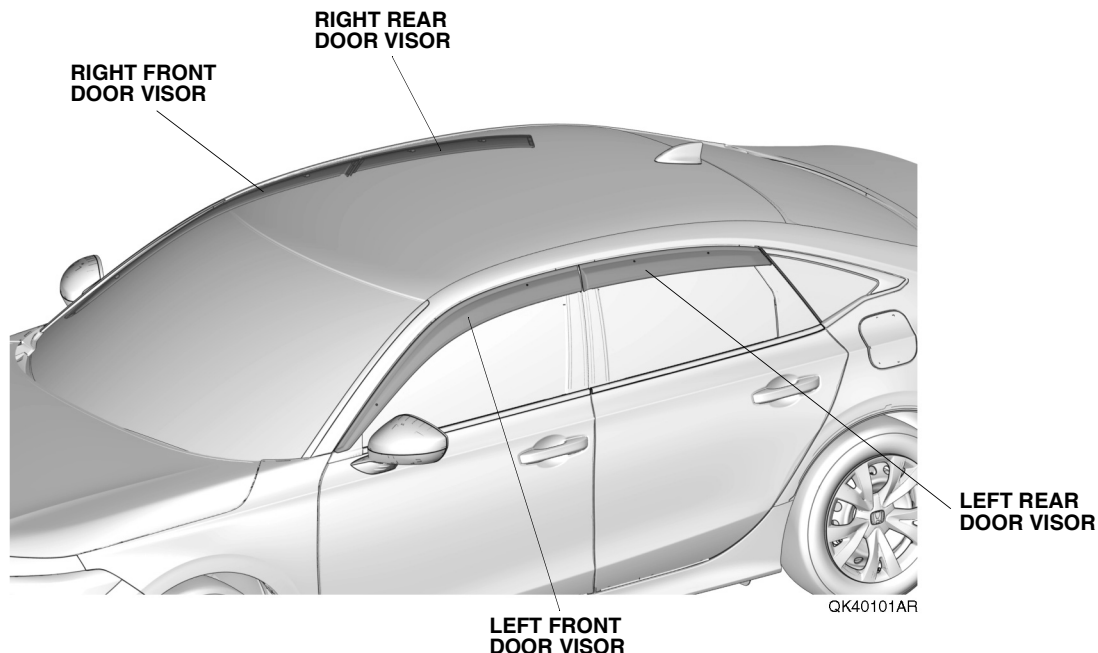

FOR YOUR SAFETY (Read carefully.)

Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of following symbols:

*All symbols are not used in all installation instructions.

⚠ DANGER

You will be killed or seriously hurt if you do not follow the instructions.

⚠ WARNING

You can be killed or seriously hurt if you do not follow the instructions.

⚠ CAUTION

You can be hurt if you do not follow the instructions.

NOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

NOTE

Gives helpful information or instructions to be followed when installing this product.




Indicates a prohibited action.


Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle.
(instrument panel.)



Wear eye protection.



Wear heavy gloves.



Use an assistant.



Place the part on a blanket.



Work perpendicular.



Remove any burrs.



Use touch-up paint and allow to dry.



Tighten to the specified torque.



Apply firm pressure while rolling, especially at the ends, to set the adhesive.



Press firmly.



Clean with isopropyl alcohol.



Return the original part to the customer.
(Do not reuse.)

Safety: General

- Visors may not be legal in all states. Please check the laws of your state.
- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.
- Be careful not to damage the vehicle or the parts.
- The illustrations may differ slightly from the actual accessory.









Safety: Accessory

- Do not shock or impact the accessories.
- Be careful this accessory can easily be damaged by solvent or contact cleaner.
- Always use the parts and tools specified in the installation instructions.
- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60°F (15°C) or above when installing accessories that use adhesive material.

- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle for 24 hours to allow the adhesive to cure.

PARTS LIST

Door Visors Kit
(P/N 08R04-T20-100)
(P/N 08R04-T20-100A)

Left front door visor	Right front door visor	Left rear door visor	Right rear door visor
			
Brackets A (Identification mark: A) (2)	Brackets B (Identification mark: B) (6)	Clips (8)	Alcohol wipes (4)
			

REQUIRED TOOLS AND SUPPLIES

- Masking tape

- Ruler




The following tools are available through the Honda Tool and Equipment Program:

Rubber Roller (T/N MHLE54D)

- Soft towel

INSTALLATION

1. Fully open the left front window.

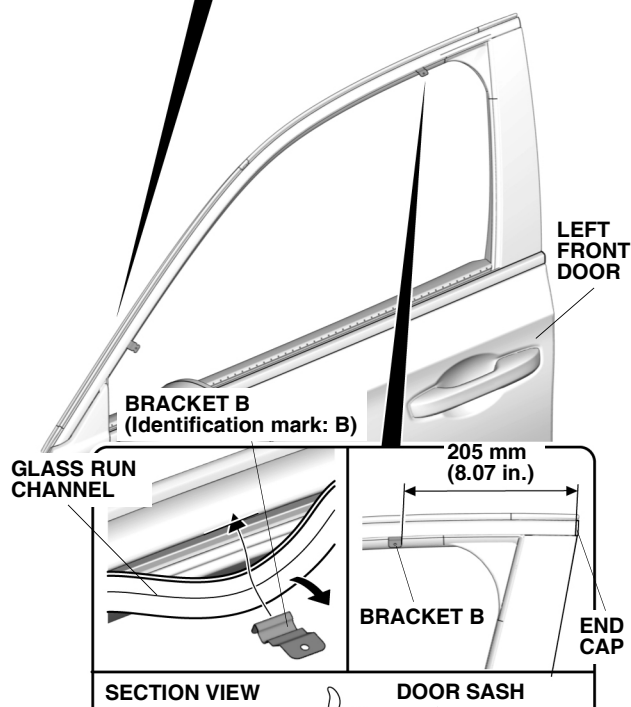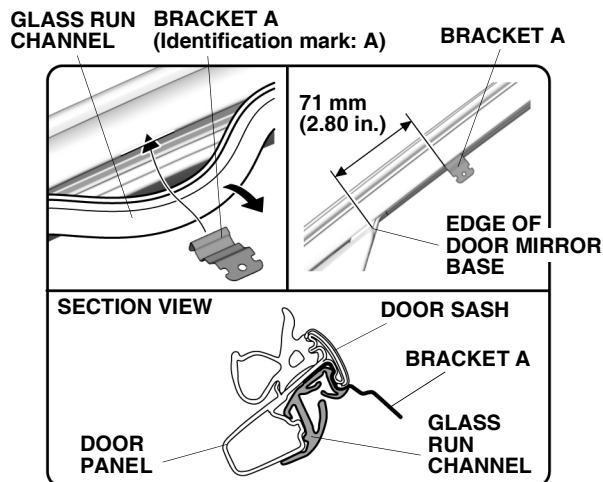

2. Install the brackets A and B.
3. Reinstall the glass run channel.


NOTE

- Check the identification marks and the installation positions of the brackets.
- Make sure to correctly install the glass run channel.

4. Clean the attaching area.


NOTE

Allow to dry thoroughly.

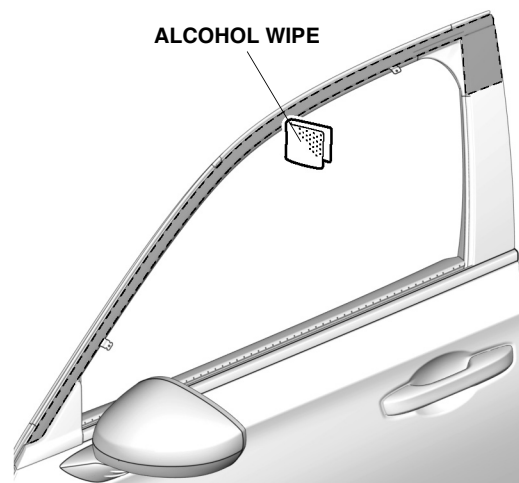

QK40104AR


5. Temporarily attach the adhesive backings.

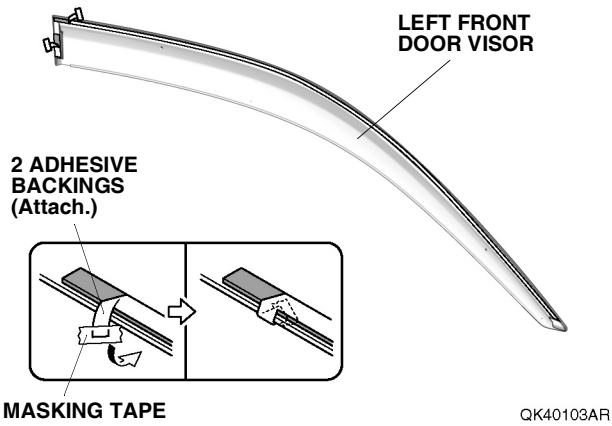


6. Install the left front door visor.

NOTE

Be extremely careful when installing the clips; they cannot be reinstalled after installation.

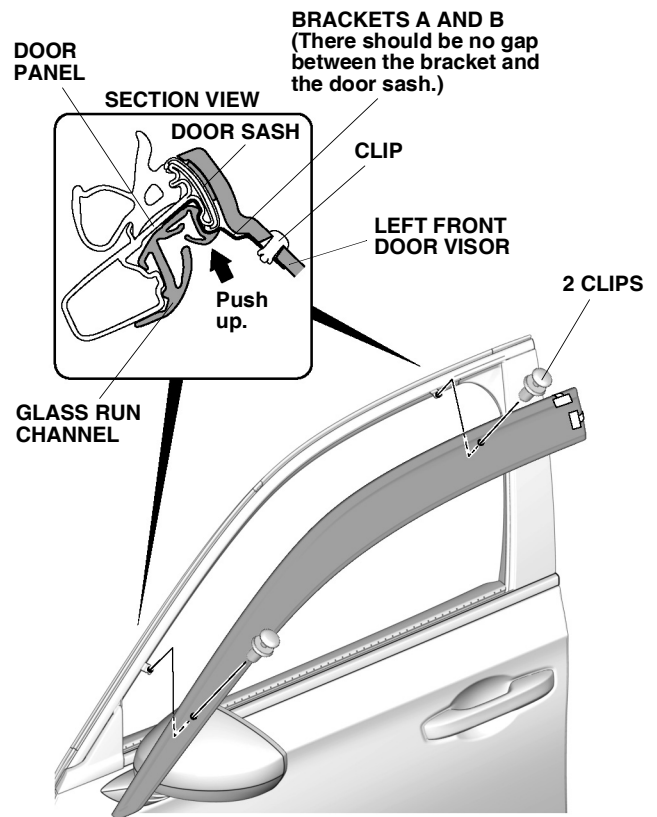


7. Line up the left front door visor.

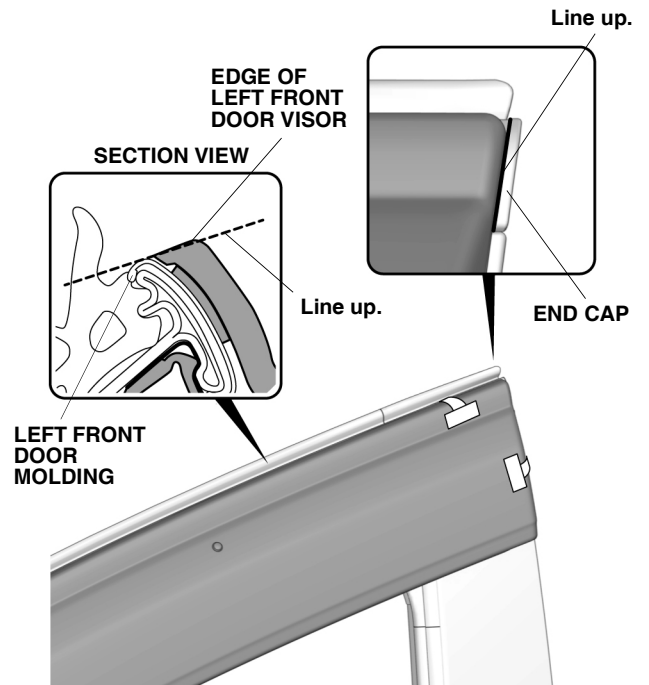


QK40106BR

8. Secure the left front door visor.

NOTE
Install in the order shown.

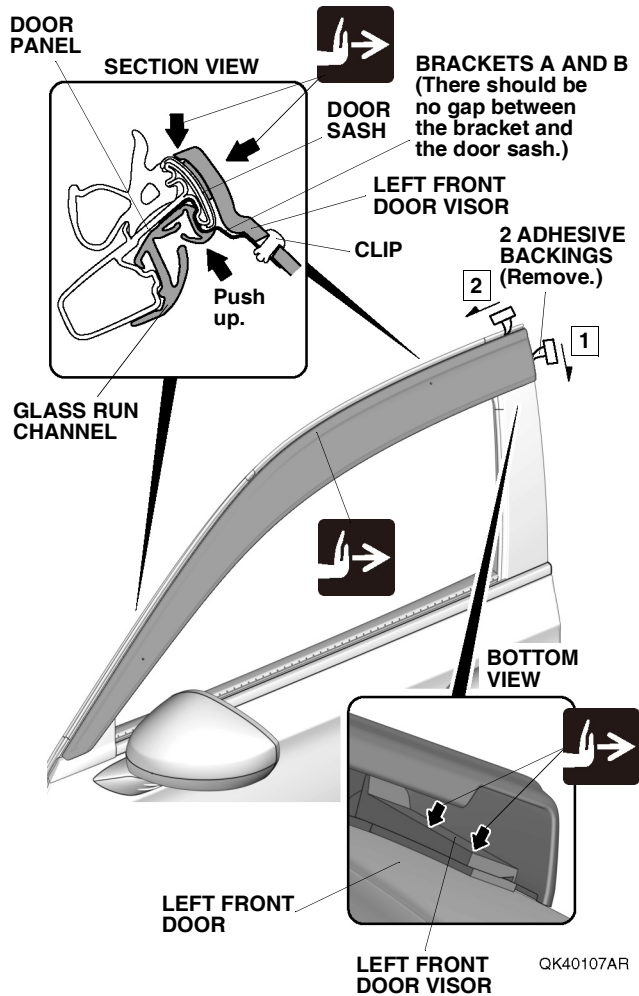


9. Secure the left front door visor.

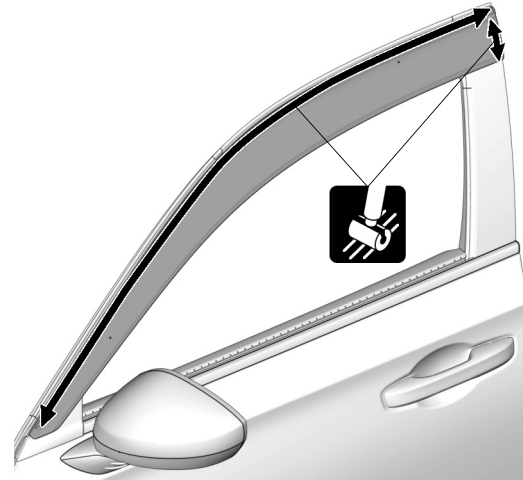

QK40114AR

10. Fully open the left rear window.

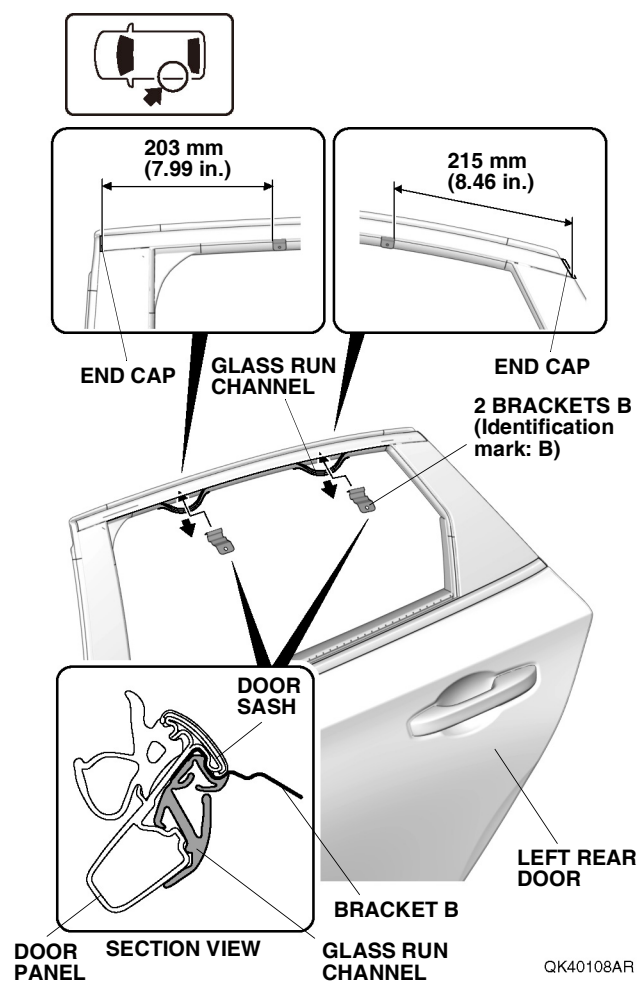

11. Install brackets B.
12. Reinstall the glass run channel.


NOTE

- Check the identification marks and the installation positions of the brackets.
- Make sure to correctly install the glass run channel.

13. Clean the attaching area.


NOTE
Allow to dry thoroughly.

ALCOHOL WIPE

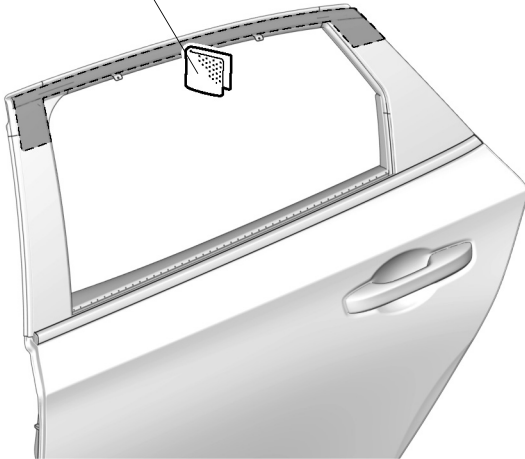

QK40110AR

14. Temporarily attach the adhesive backings.

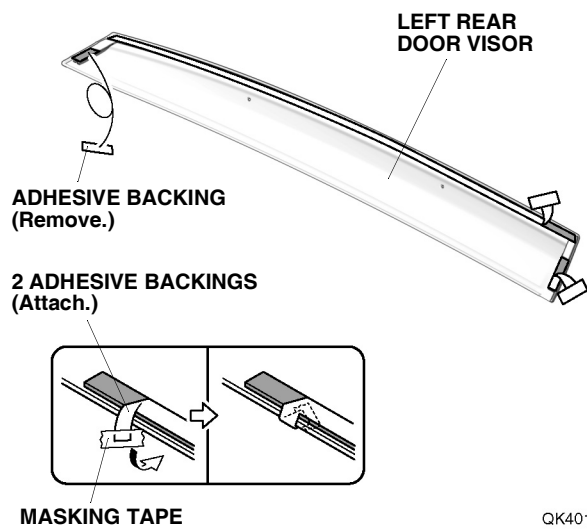


QK40109AR

15. Remove the adhesive backing.

16. Install the left rear door visor.


NOTE

Be extremely careful when installing the clips; they cannot be reinstalled after installation.

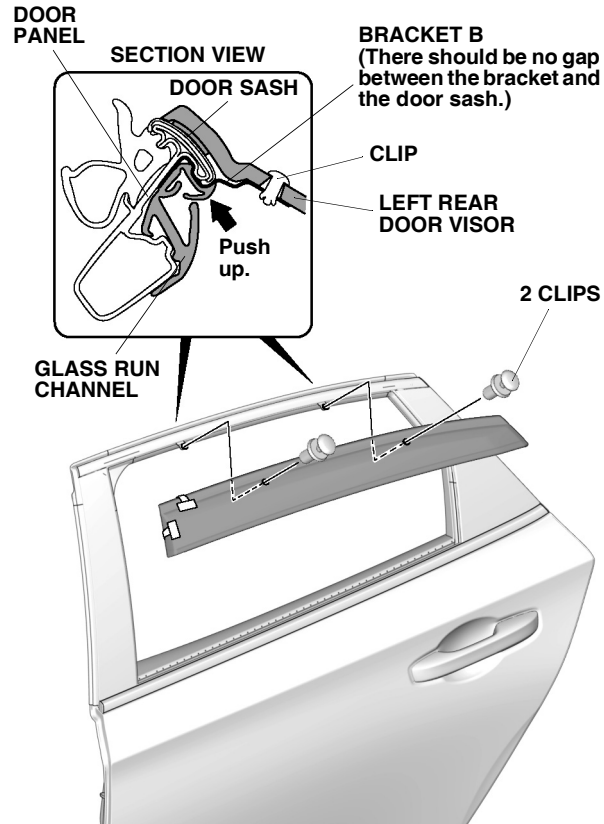

QK40111AR


17. Line up the left rear door visor.

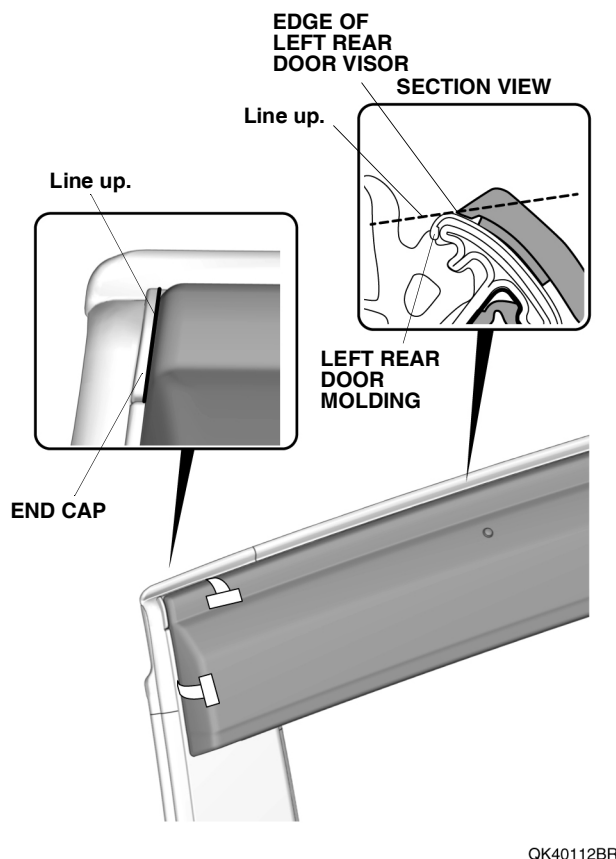


18. Secure the left rear door visor.

NOTE


Install in the order shown.

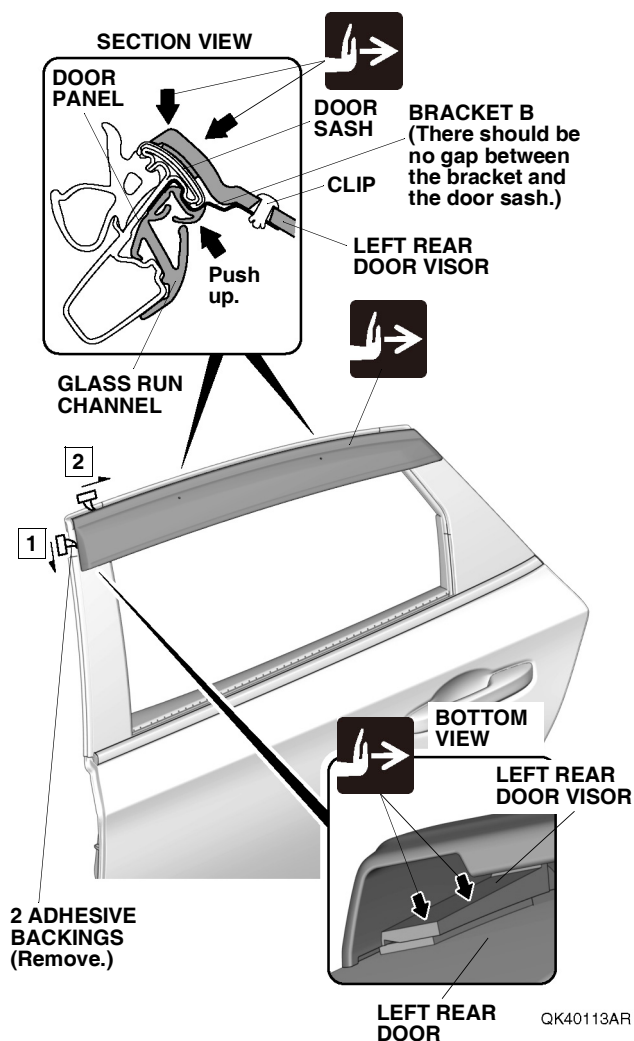

19. Secure the left rear door visor.

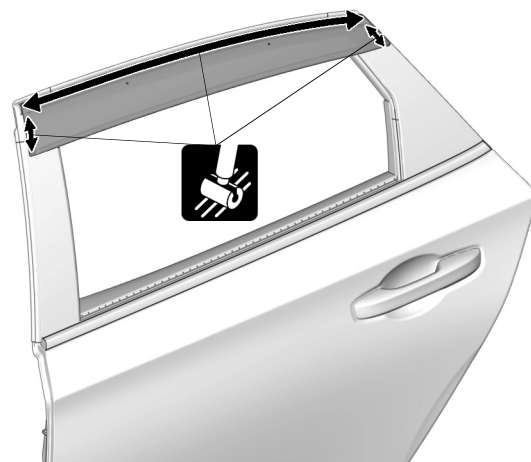

20. Repeat the same procedures on the other side.

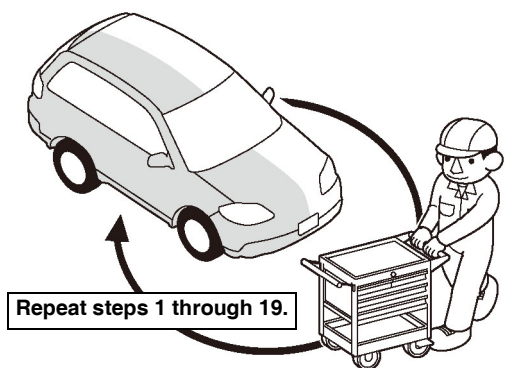

Q9D1014AM

21. Check that all parts are installed properly.

<Resetting the Power Window Control Unit>

NOTICE

Refer to the Service information.

22. Perform the resetting.

Please give your customer a copy of this page.

Care of the Door Visor

- To avoid damaging the surface, never use ammonia-based cleaners or solvents to clean the door visor.
- Clean with a solution of mild dishwashing soap and water using a soft cloth or chamois.
- To remove fine scratches and restore the original luster, use Meguiar's Mirror Glaze plastic cleaner and polish or an equivalent high-quality plastic cleaner.