INSTALLATION INSTRUCTIONS

AUTOMATIC DAY/NIGHT MIRROR


Accessory

2023 CR-V MODEL SERIES

Application

Publications No.
VERSION 1
Issue Date
AUG 2022

#### **GENERAL VIEW**

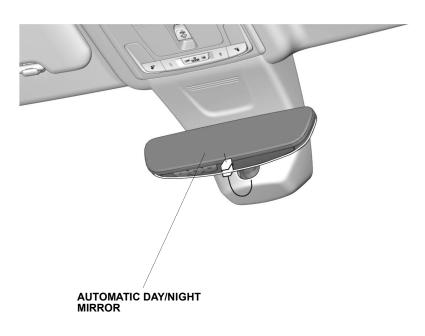

QL01501AN

### FOR YOUR SAFETY (Read carefully.)

### Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

\*All symbols are not used in all installation instructions.

<b>▲</b> DANGER	You will be killed or seriously hurt if you do not follow the instructions.
<b>▲</b> WARNING	You can be killed or seriously hurt if you do not follow the instructions.
<b>A</b> CAUTION	You can be hurt if you do not follow the instructions.
NOTICE	Gives advice to prevent damage to the product, vehicle, the environment or other property.
NOTE	Gives helpful information or instructions to be followed when installing this product.
	Indicates a prohibited action



Indicates a prohibited action.

#### Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

\*All icons are not used in all installation instructions.




The location on the vehicle.



The location in the vehicle. (Instrument panel.)



Wear eye protection.





Work perpendicular.



Use touch-up paint and allow to dry.



Apply firm pressure while rolling, especially at the ends, to set the adhesive.



Clean with isopropyl alcohol.



Wear heavy gloves.



Place the part on a blanket.



Remove any burrs.



Tighten to the specified torque.




Press firmly.



Return the original part to the customer. (Do not reuse.)


### Wire Harness Routing Precaution



Do not secure the accessory harness to the SRS harness. (except for instruction cases.)



Push the connectors and terminals together until they lock.



Do not pull the harness to unplug the connectors.



Install removed connectors in their original location.



Do not pull the harness.




Secure the accessory harness as shown.





Do not pinch the harness.



Cut off the excess wire tie.

### Safety: General

- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and safety of others.
- · Be careful not to damage the vehicle or the parts.
- Be extremely careful when handling retaining tabs and clips.
- Note the locations of the parts before removing them so they can be properly installed in their original positions.
- · The illustrations may differ slightly from the actual accessory.

#### Safety: Electric Parts


Always disconnect the negative cable from the battery before beginning work.

#### Safety: Accessory

Always use the parts and tools specified in the installation instructions.

#### PARTS LIST

Automatic Day/Night Mirror Kit (P/N 08V03-3A0-100)

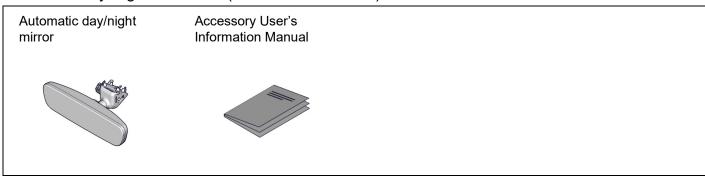

#### REQUIRED TOOLS AND SUPPLIES

10 mm Open end wrench

The following tools are available through the Honda Tool and Equipment Program:


Trim Tool Set (T/N SOJATP2014)
 Plastic Trim Tool (T/N SILTRIMTL10)


#### **INSTALLATION**


1. Disconnect the negative cable from the battery.

#### **NOTE**

With the driver's door open, turn the vehicle to the OFF (LOCK) mode, then wait at least 3 minutes before disconnecting the 12 volt negative battery cable.








QCD0502BM

2. Remove the sensor cover lid.






Remove the rearview mirror.



4. Plug-in the vehicle connector.

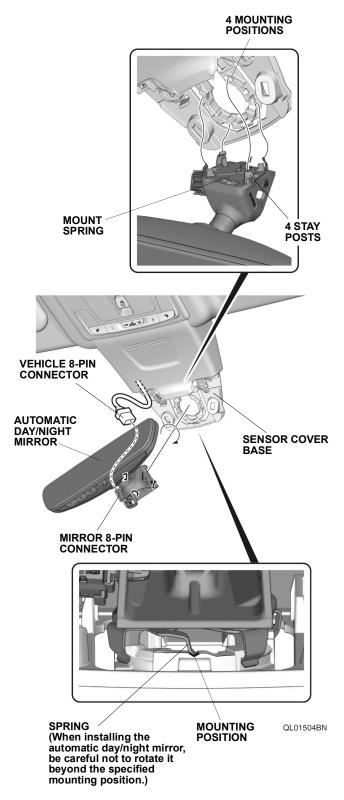

Install the automatic day/night mirror.


#### NOTE

Replace the mount spring whenever the automatic day/night mirror is removed.

6. Check that all parts are installed and properly routed.

#### NOTE

- Check that all harnesses are not pulled or pinched.
- Make sure all clips and wire ties are securely installed.
- 7. Install all removed parts.
- 8. Connect the negative cable to the battery.



- 9. Make sure the accessory operates as described in the Accessory User's Information Manual.
- 10. Make sure all accessories and systems operate properly.
- 11. If necessary, restore the systems back to normal operation as described in the service information.
- Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
- 13. Give the Accessory User's Information Manual to the customer.