



INSTALLATION INSTRUCTIONS

Accessory
HPD REAR DIFFUSER
71502-F27S-A02


Application
2011-14 CR-Z

Publications No.
All 50385
Issue Date
NOV 2013

NOTE: The HPD Rear Diffuser must be installed with the HPD Exhaust System, P/N 18300-F27S-A05.

PARTS LIST

HPD rear diffuser

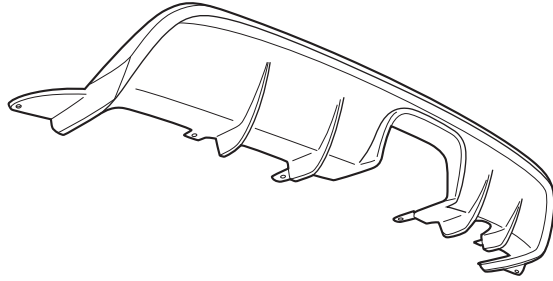

TOOLS AND SUPPLIES REQUIRED


Phillips screwdriver

Eye protection (face shield, safety goggles, etc.)

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)

Illustration of the HPD Rear Diffuser Spoiler on the Vehicle

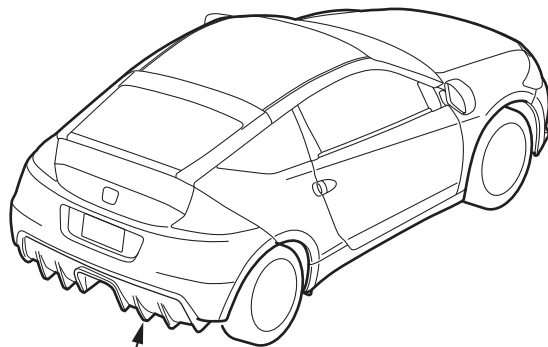


REAR DIFFUSER SPOILER

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

NOTE:

- Install the HPD Exhaust System first.
 - Do not to damage the paint finish.
1. Remove the clips and release the hooks (A), then remove the rear bumper lower trim (B) from the rear bumper (C).

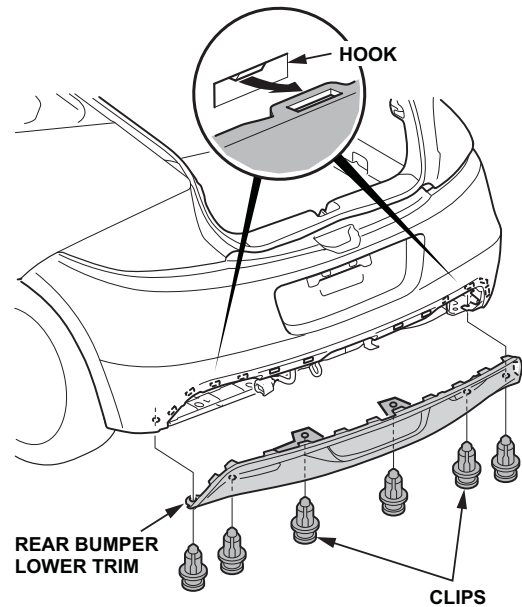

2. Remove the two outer bumper screws.

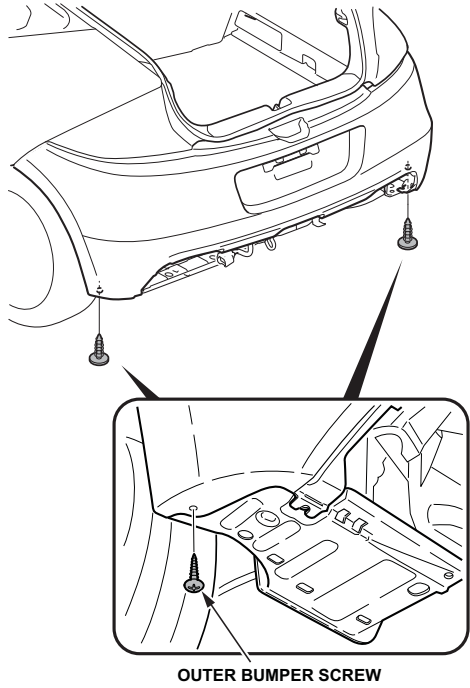

3. Install the HPD rear diffuser to the rear bumper with the 12 retaining tabs and two clips, then secure the corners using the screws removed in step 2.

