



INSTALLATION INSTRUCTIONS

Accessory
FUEL TANK LID EMBLEM
 P/N 08F59-SZT-100

Application
 2016 CR-Z


Publications No.
VERSION 1
 Issue Date
OCT 2015

PARTS LIST


Fuel tank lid emblem



Template



Alcohol swab




TOOL AND SUPPLIES REQUIRED

Shop towel

Spray bottle

3M Protective tape application solution

Illustration of the Fuel Tank Lid Emblem on the Vehicle

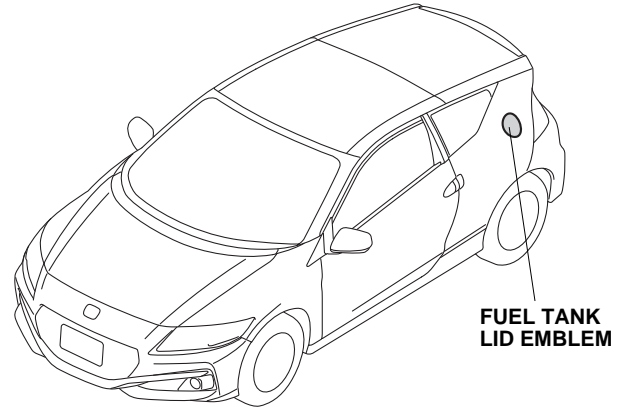

FUEL TANK LID EMBLEM

QE31726AG


INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."


NOTE:

- Do not damage the paint finish.
- This kit should be installed only if the ambient air temperature is 15° C (60° F) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Make sure your customer is aware of this.

1. Open the fuel tank lid.

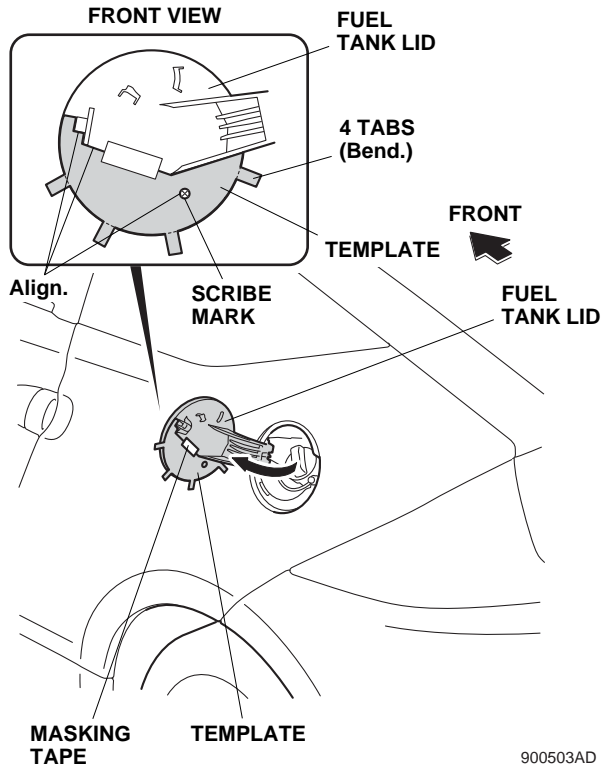


2. Align and attach the template to the back of the fuel tank lid with masking tape as shown.
3. Bend the four tabs on the template forward.
4. Close the fuel tank lid.

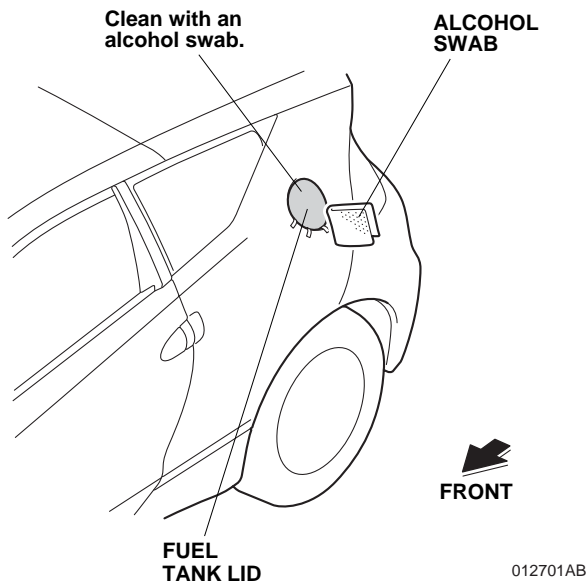


5. Using one alcohol swab, thoroughly clean the area where the fuel tank lid emblem will attach.

6. Using a spray bottle with the 3M protective tape application solution, spray the area where the fuel tank lid emblem will attach. Spray some solution on your hands.

- Make sure to reapply the 3M protective tape application solution if the area becomes dry during the installations.

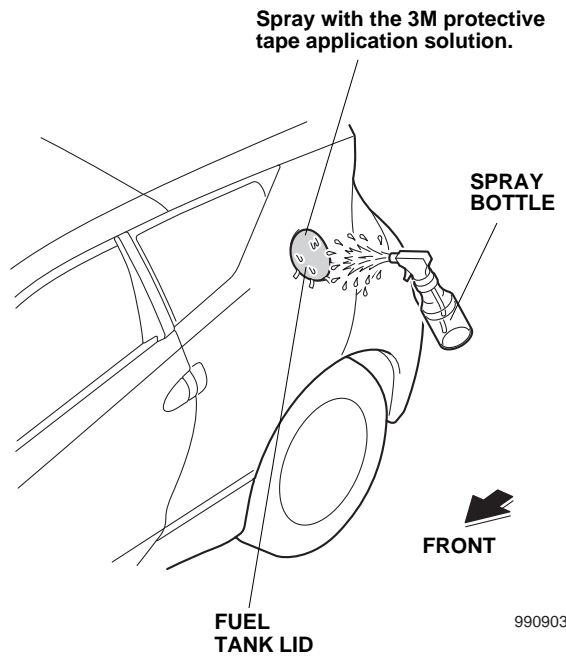


7. Remove the adhesive backing and the protective backing from the fuel tank lid emblem.
- Do not touch the adhesive side of the fuel tank lid emblem.

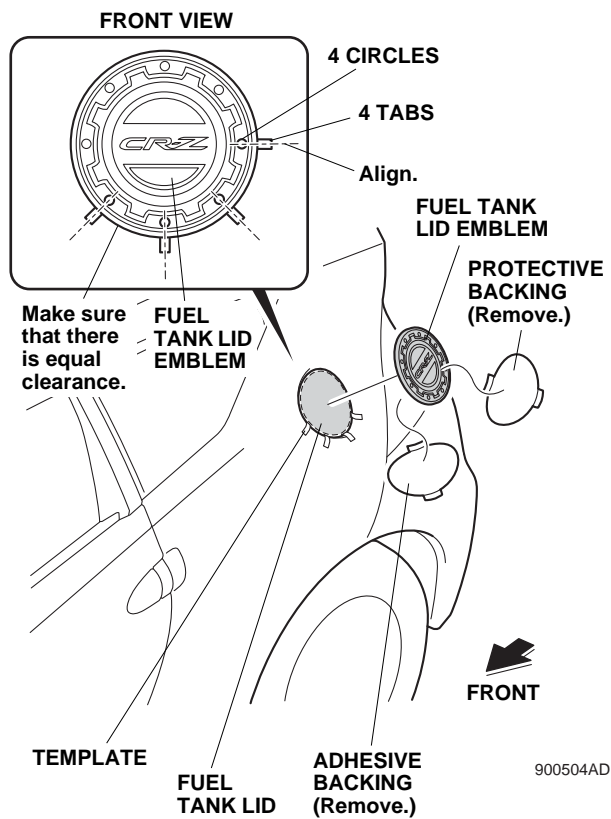


8. Line up the four circles on the fuel tank lid emblem with the four tabs on the template. Attach the fuel tank lid emblem to the fuel tank lid as shown. NOTE: Make sure that the fuel tank lid emblem is centered.

9. Using a shop towel, start from the center and work outward to smooth out the fuel tank lid emblem.
- Move the shop towel in one direction only.
 - Work slowly and keep pressure against the fuel tank lid emblem.
 - Press firmly on the indented part on the fuel tank lid emblem to work out the air bubbles.
 - Use the palm of your hand to readjust the position of the fuel lid emblem.
- NOTE: Do not scratch the surface.

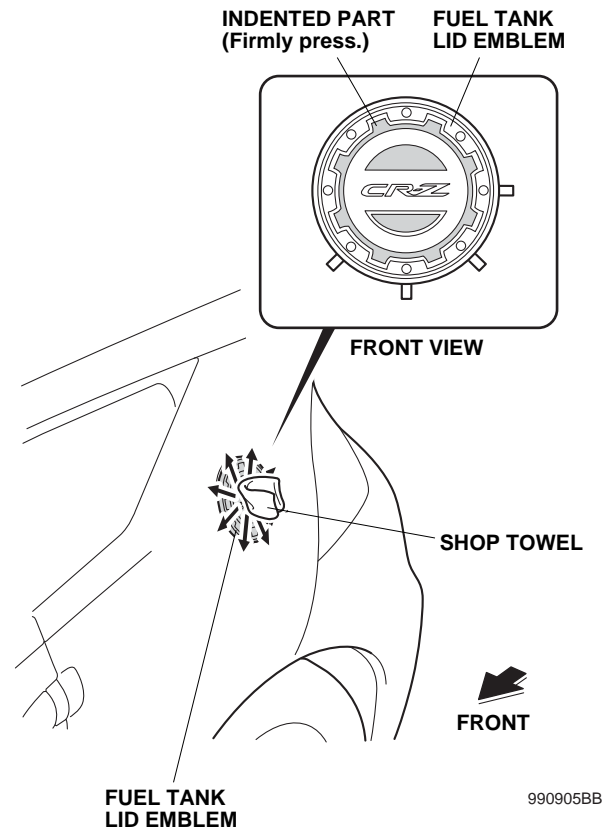

- Using a shop towel, wipe the 3M protective tape application solution from the fuel tank lid and vehicle. Allow the fuel tank lid emblem to dry for 24 hours. NOTE: Do not open the fuel tank lid until the emblem is thoroughly dry.

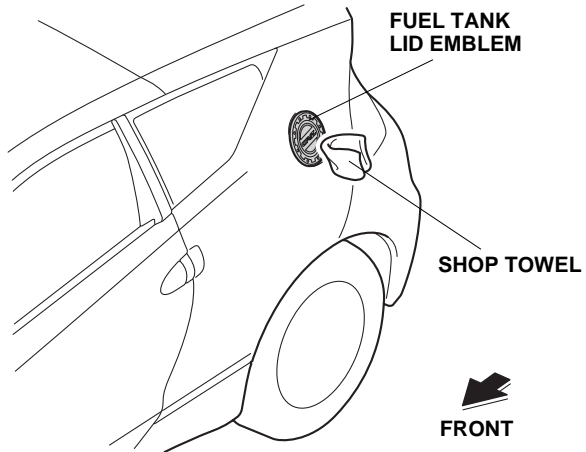

990906AB

- Remove the template.