



HONDA INSTALLATION INSTRUCTIONS

Accessory

HFP FLOOR MATS
P/N 08P15-T5A-100

Application

2018 FIT

Publications No.

VERSION 1

Issue Date

JUL 2017

PARTS LIST

Driver's floor mat



Passenger's floor mat




Left rear floor mat



Right rear floor mat



Illustration of the Floor Mats Installed in the Vehicle

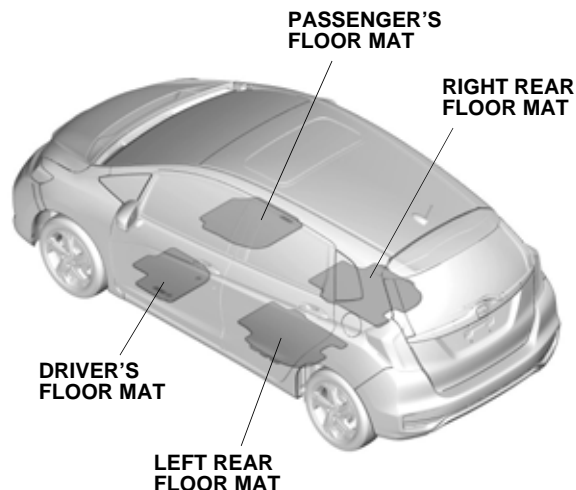

QFD0601AT


INSTALLATION

NOTE:


- Before installing the mats, identify their installation positions.
- Connect the driver's mat to the anchors to prevent the mat from sliding forward and possibly interfering with the pedals.
- If you remove the driver's mat, make sure you re-anchor it when you put it back in your vehicle.
- If you replace the driver's mat, use a factory mat designed to be used with the anchors.
- Do not put an additional mat on top of the anchored mat. An additional mat may slide forward and possibly interfere with the pedals.

Installing the Floor Mats



1. Remove the vehicle floor mats.

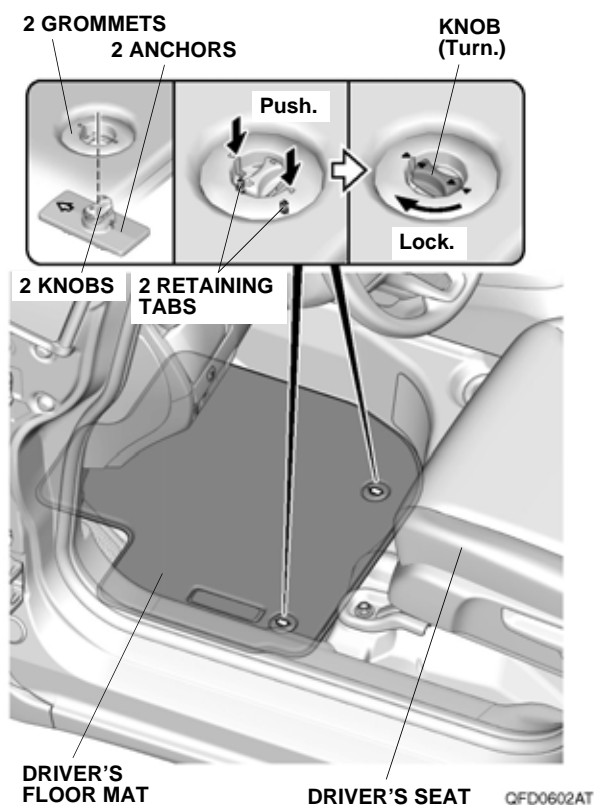

2. Place the grommets in the driver's floor mat over the anchors. Push the grommets into the anchors to secure the retaining tabs, then turn the knobs 90° to secure the driver's floor mat.
3. Place the passenger's floor mat as shown.

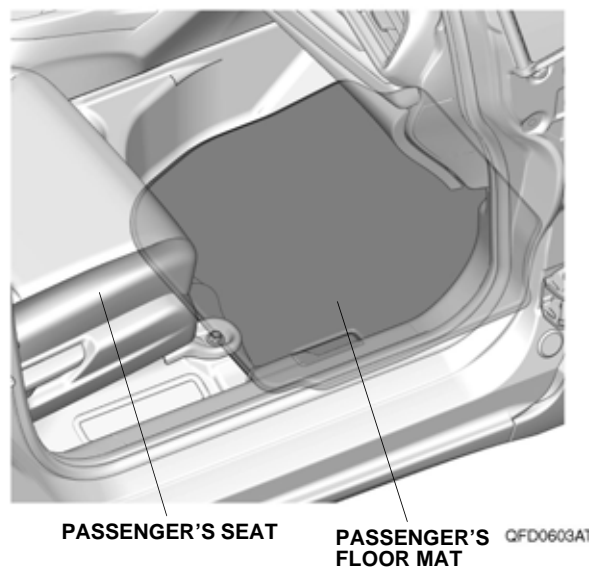


4. Place the right rear floor mat as shown.

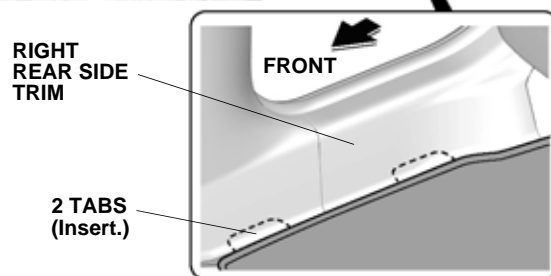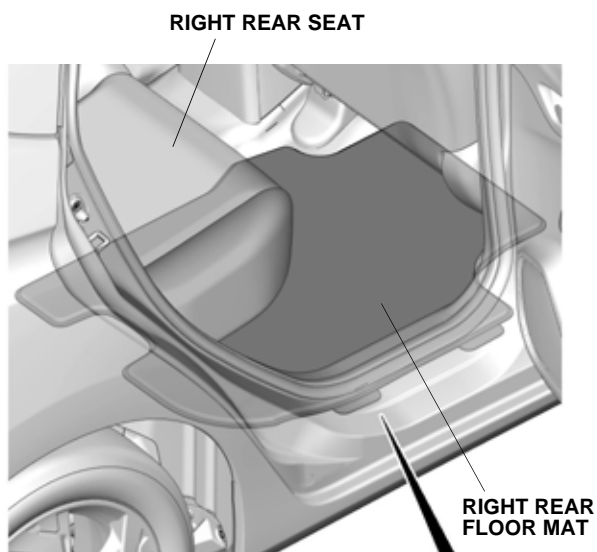

QFD0604AT

5. Place the left rear floor mat as shown.

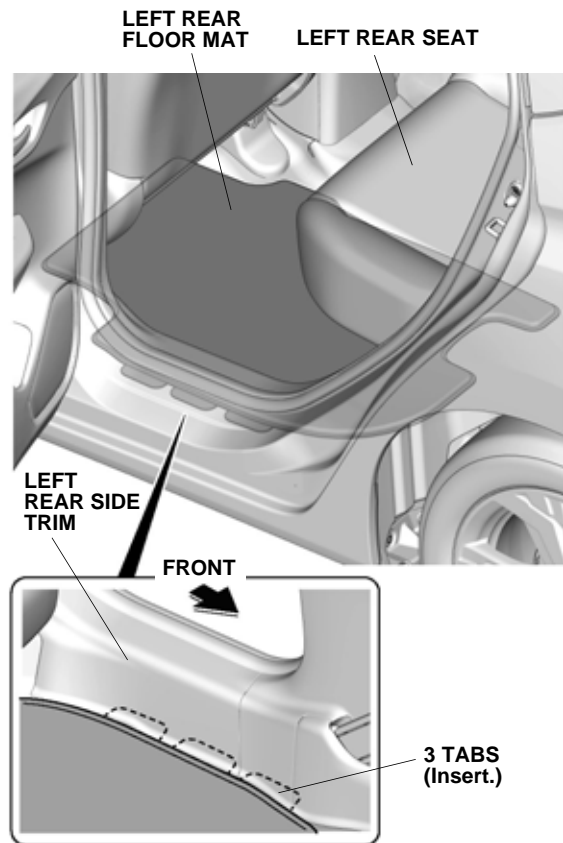

QFD0605AT