



HONDA INSTALLATION INSTRUCTIONS

Accessory

BLACK EMBLEM

Application

2021 HR-V

Publications No.

VERSION 1

Issue Date

SEP 2020

PARTS LIST

Car Set Name + H-mark Emblem Kit
P/N 08F20-T7S-100

Front H emblem



Rear H emblem



HR-V emblem



4 Push nuts



3 Alcohol wipes




AWD Emblem Kit
P/N 08F20-T7S-100A

AWD emblem



Alcohol wipe




SPORT Emblem Kit
P/N 08F20-T7S-100C

SPORT emblem



Alcohol wipe





TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
Flat-tip screwdriver
Stubby Phillips screwdriver
10 mm Open end wrench
6 mm, 8 mm, and 10 mm Sockets
Ratchet
Torque wrench
Diagonal cutters
Masking tape
Blanket
Shop towel
String
Ruler
Scissors

The following tools are available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)
- Push Pin Pliers (T/N 07AAC-001A101)

Illustration of the Black Emblems Installed on the Vehicle

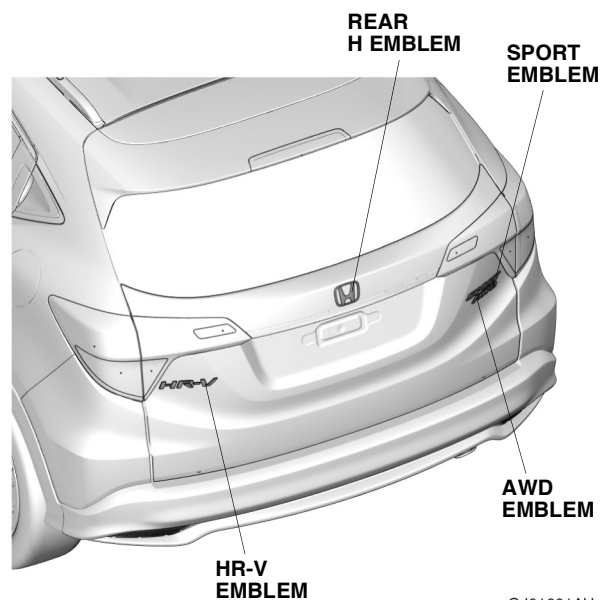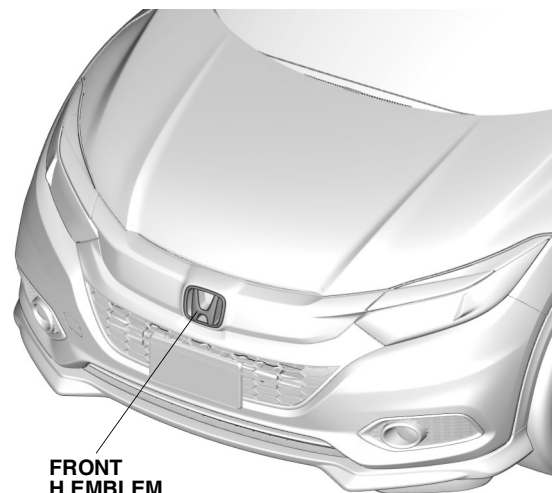

QJ01601AU


INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE:


- Be careful not to damage the body paint finish.
 - This kit should be installed only if the ambient air temperature is 60°F (15°C) or above.
 - To allow the adhesive to cure, do not wash the vehicle for 24 hours. Make sure the your customer is aware of this.
1. Disconnect the negative cable from the battery.

2. Remove the front bumper:
 - Wrap a shop towel around the lever.
 - Apply masking tape as shown.

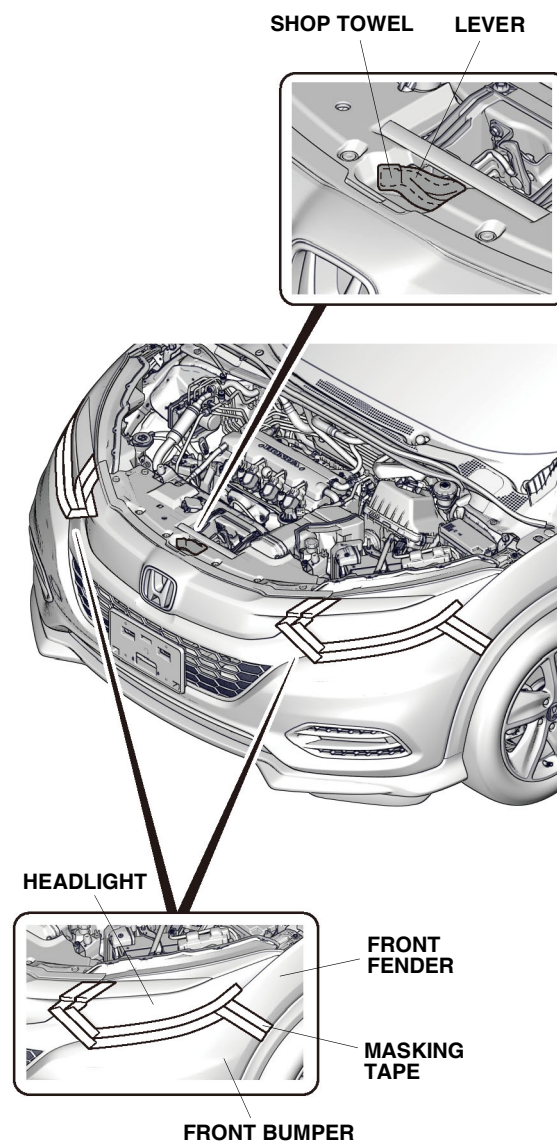


QH12903AC

- Remove the front grille cover.

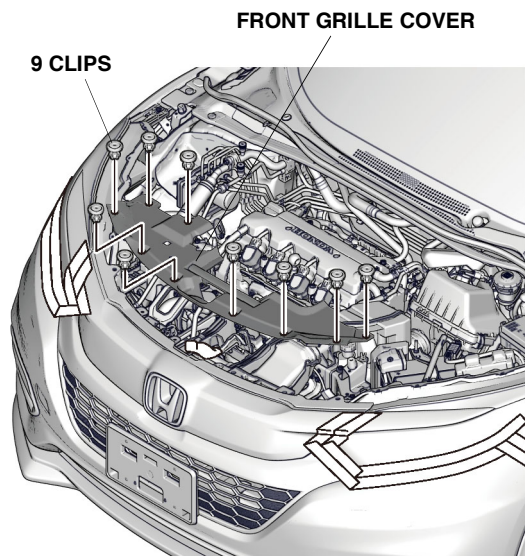


QH12904AC

- Remove the 12 clips.

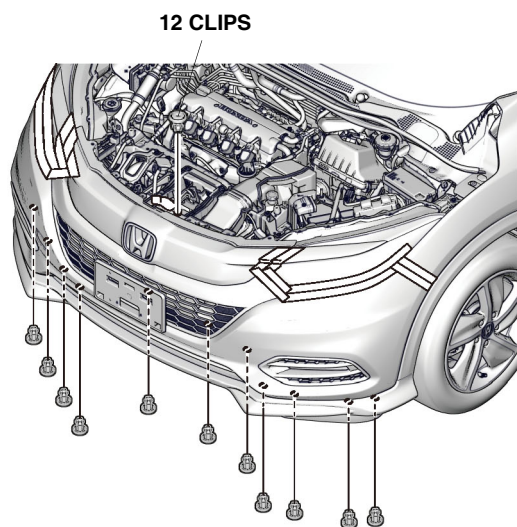


BOTTOM VIEW

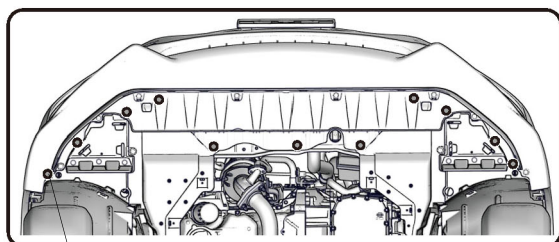

11 CLIPS


QH12905AC

- Remove the two self-tapping screws and four clips on each side.

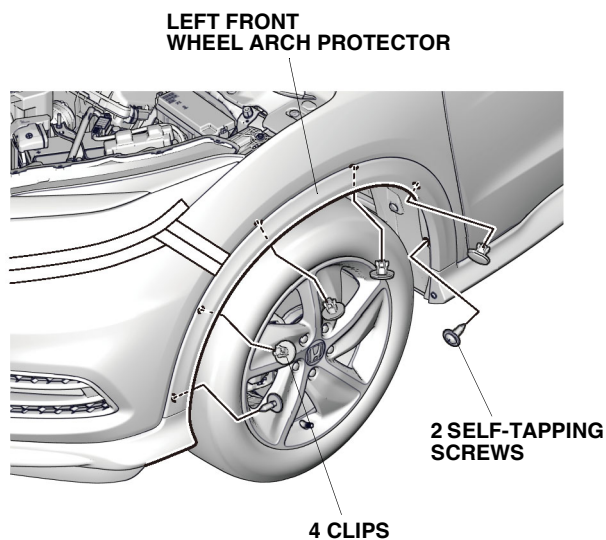

QH12906AC

- Remove the front wheel arch protector on each side.

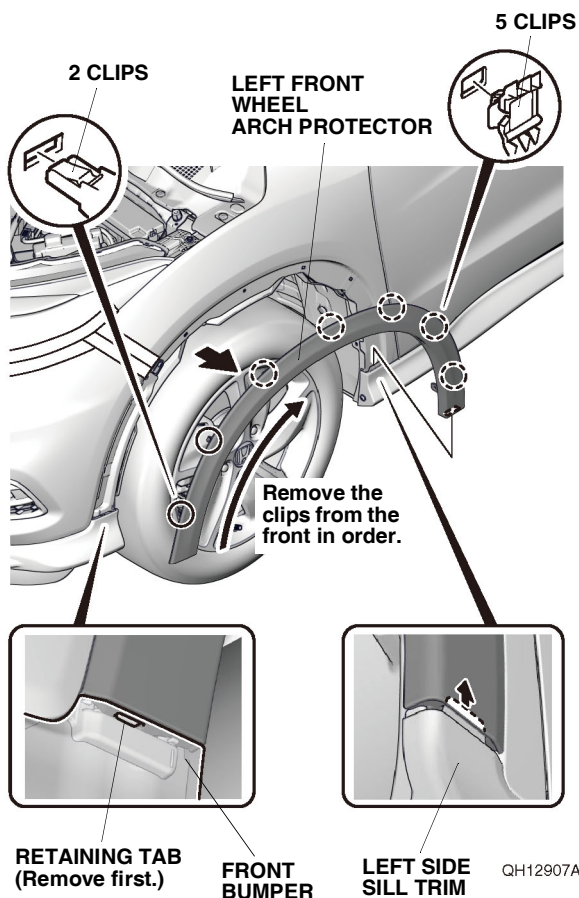


**RETAINING TAB
(Remove first.)**

FRONT BUMPER

LEFT SIDE SILL TRIM


QH12907AC

- Remove the self-tapping screw on each side.

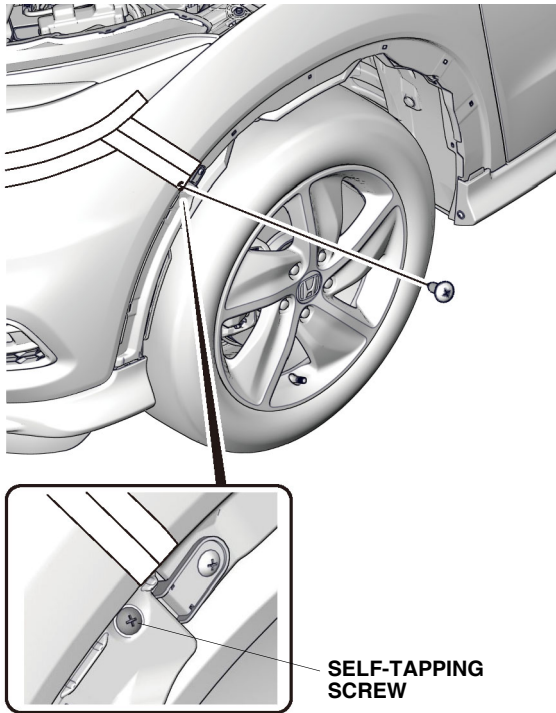


QH12908AC

- Release the five retaining tabs on each side.

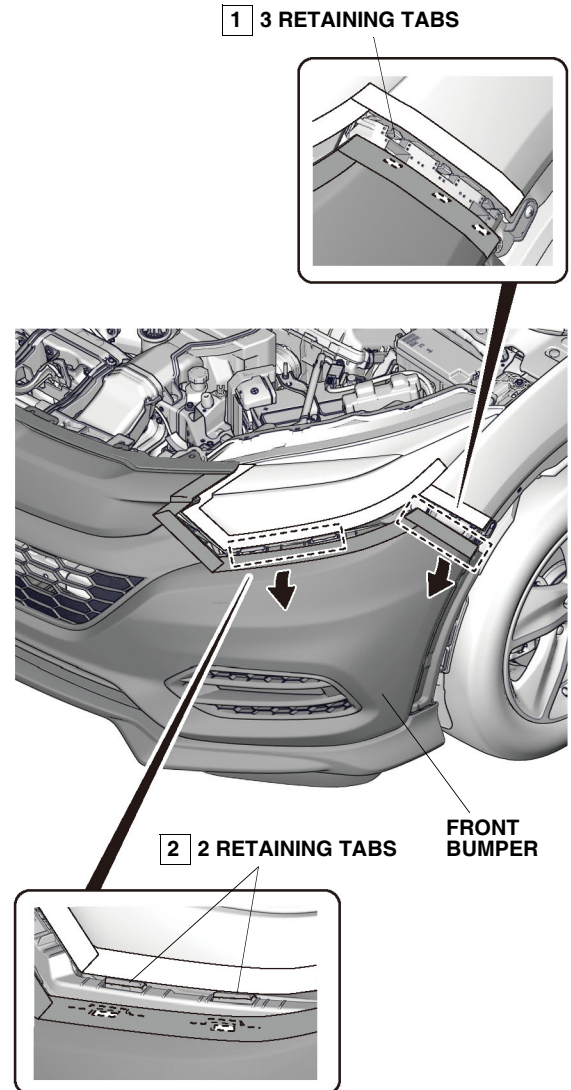


QH12909AC

- With the help of an assistant, remove the front bumper and unplug the vehicle connectors (if equipped).
- Place the front bumper on a blanket.

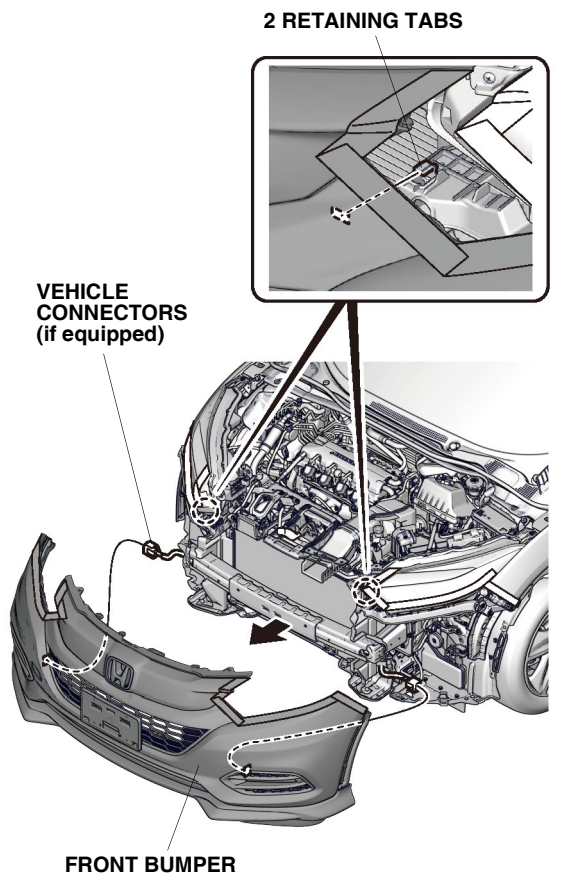


3. Remove the rear license trim.
NOTE: Make sure to remove the clip if it remained on the vehicle.

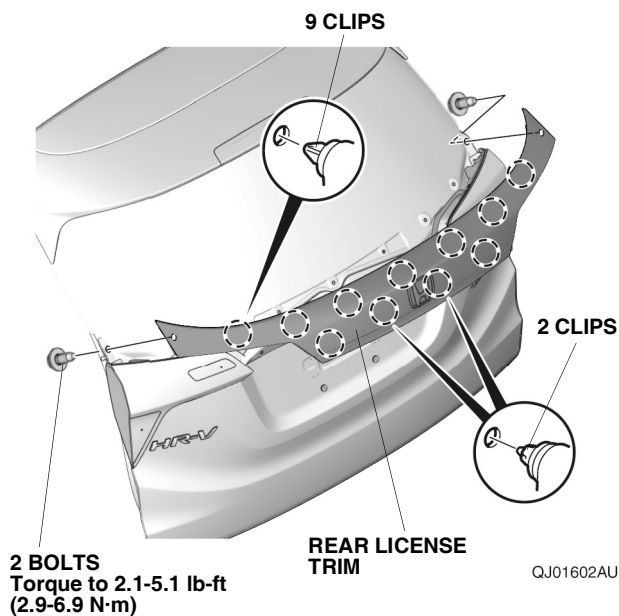


Installing the Black Emblems

4. Remove the front grille from the front bumper.

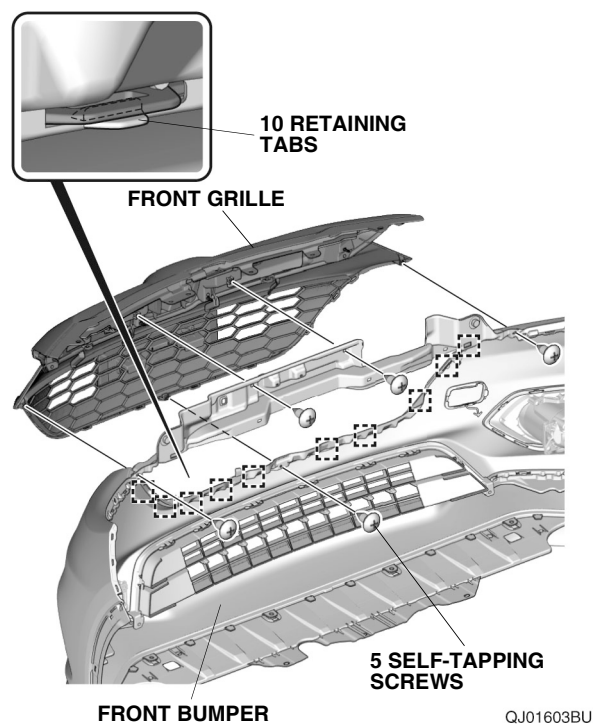


- Remove the vehicle front H emblem from the front grille.

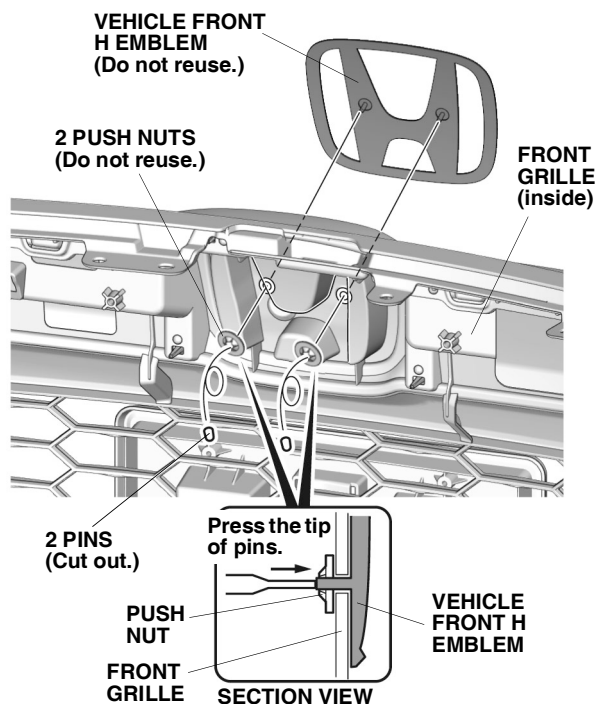

QJ01604AU

- Using an alcohol wipe, thoroughly clean the front grille where the front H emblem will attach.

FRONT GRILLE (outside)
(Clean with an alcohol wipe.)

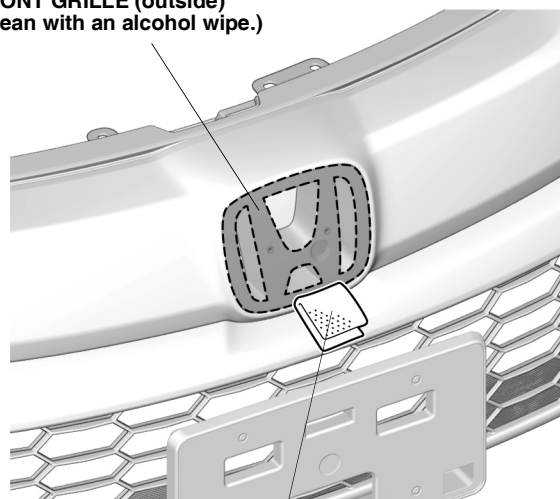


ALCOHOL WIPE

QJ01636AU

- Remove the adhesive backings from the front H emblem. Install the front H emblem to the front grille as shown.

NOTE: Check the orientation of the push nuts.

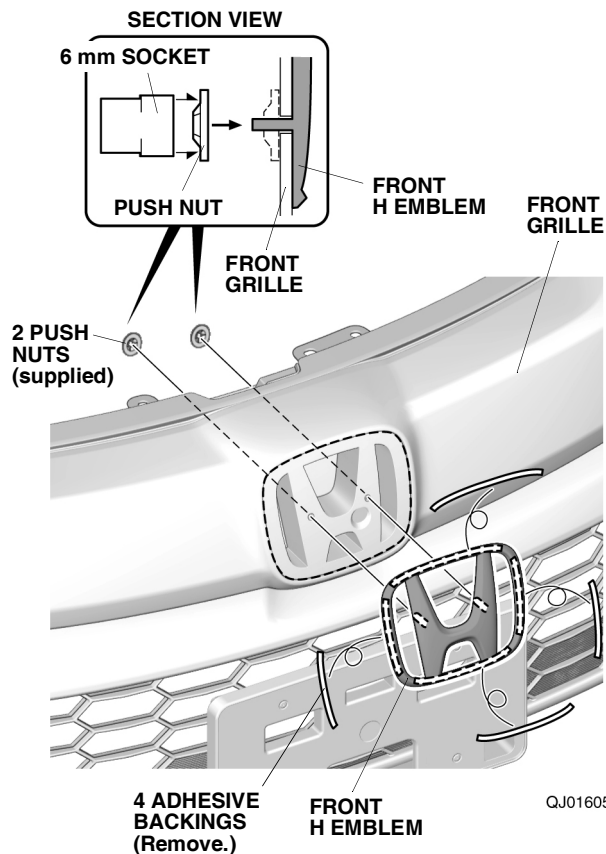


QJ01605BU

- Using the palm of your hand, firmly press the front H emblem against the front grille.

9. Using a piece of string, remove the vehicle rear H emblem by cutting along the outer edges as shown.


NOTE:

- Do not damage the rear license trim when removing the vehicle H emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the rear license trim.

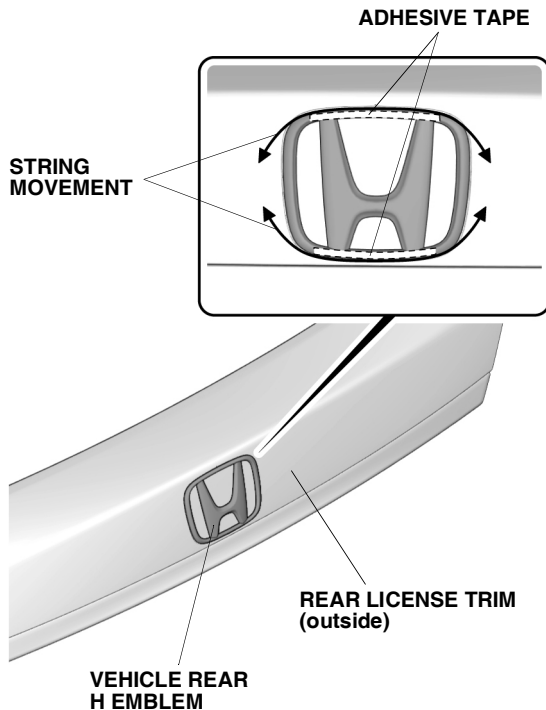


QJ01609BU

10. Remove the vehicle rear H emblem by removing the push nuts from the vehicle rear H emblem.
NOTE: Make sure to thoroughly remove the adhesive tape from the rear license trim.

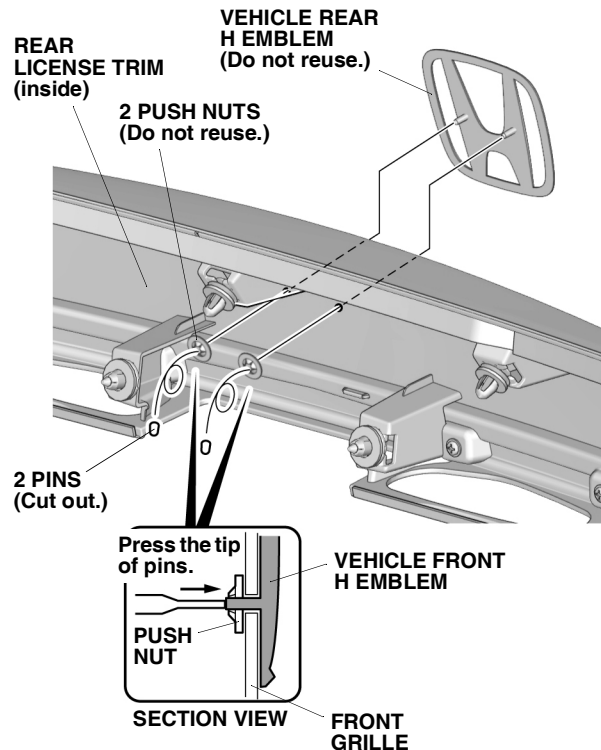

QJ01607BU


11. Using an alcohol wipe, thoroughly clean the rear license trim where the rear H emblem will attach.

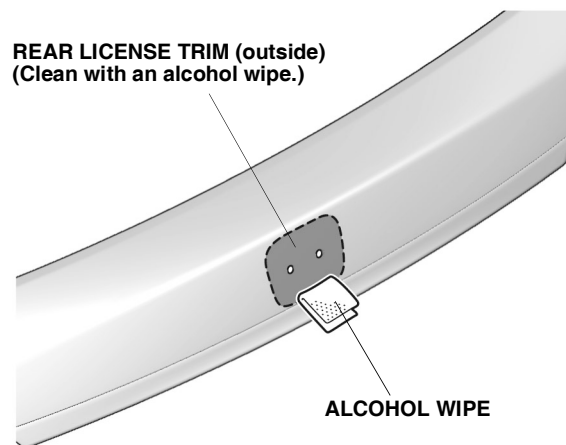

QJ01610AU

12. Remove the adhesive backings from the rear H emblem. Install the rear H emblem to the rear license trim as shown.


NOTE: Check the orientation of the push nut.

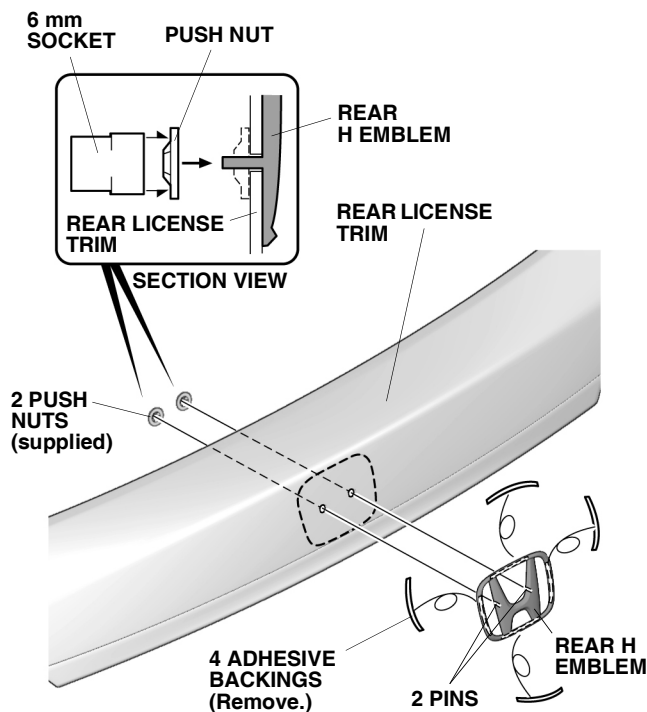

QJ01611BU


13. Using the palm of your hand, firmly press the rear H emblem against the rear license trim.

14. Using scissors, cut the HR-V emblem as shown.

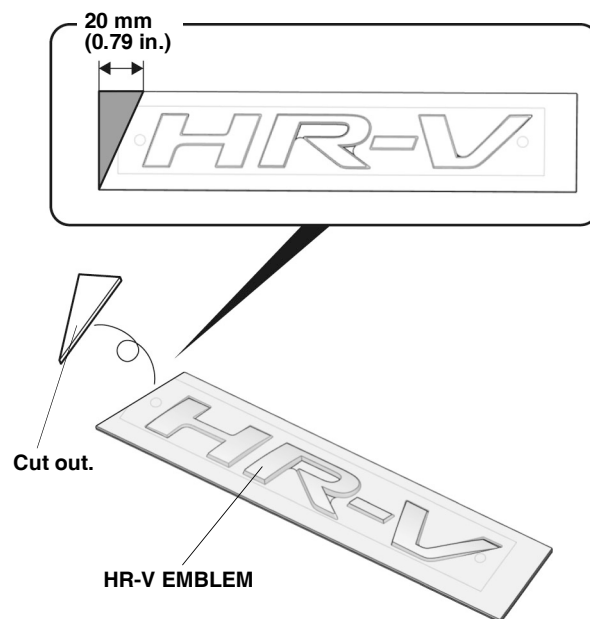


QJ01612AU

15. Remove the position film from the HR-V emblem, then remove the HR-V emblem from the guide form.

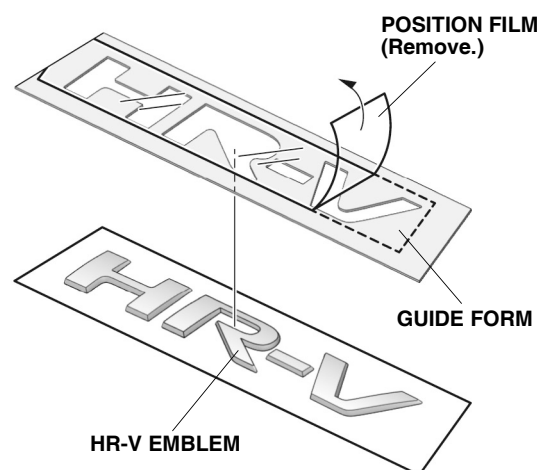


QJ01613AU


16. Install the guide form to the vehicle HR-V emblem on the tailgate.

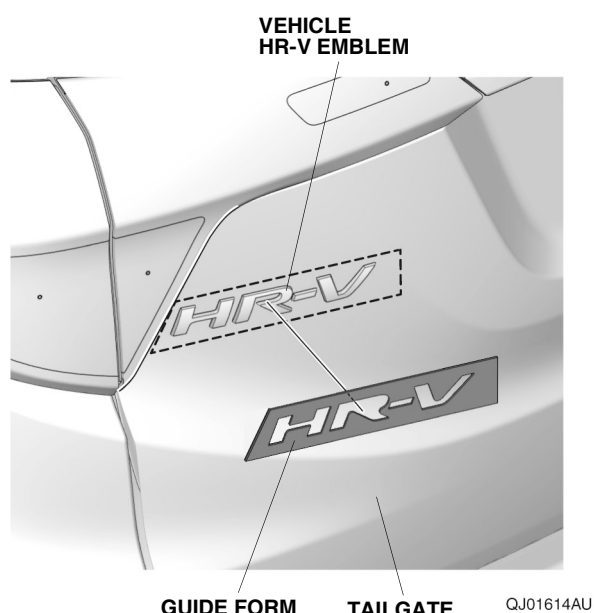

17. Attach masking tape along the guide form as shown.

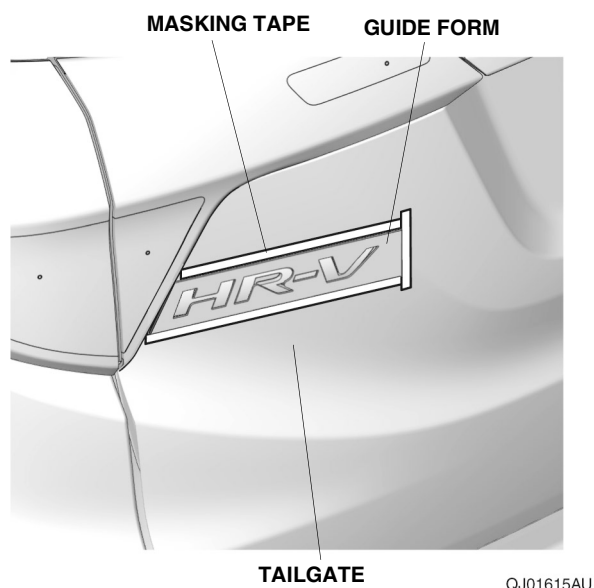


18. Remove the guide form from the tailgate.

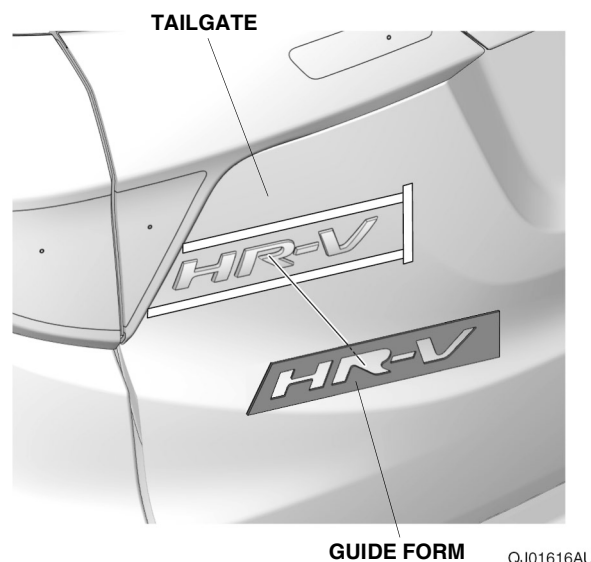


19. Using a piece of string, remove the vehicle HR-V emblem by cutting along the outer edges as shown.
NOTE:

- Do not damage the vehicle body when removing the vehicle HR-V emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the vehicle body.

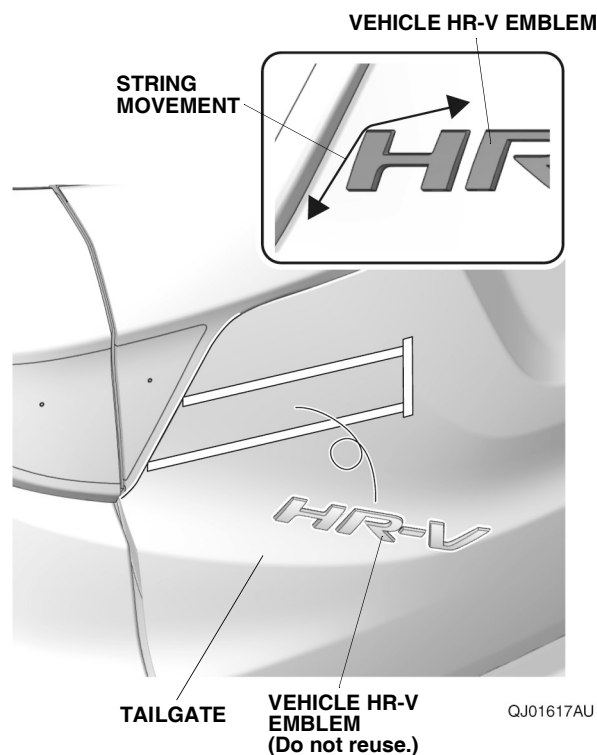


20. Install the HR-V emblem in the guide form, and temporarily secure it with masking tape.

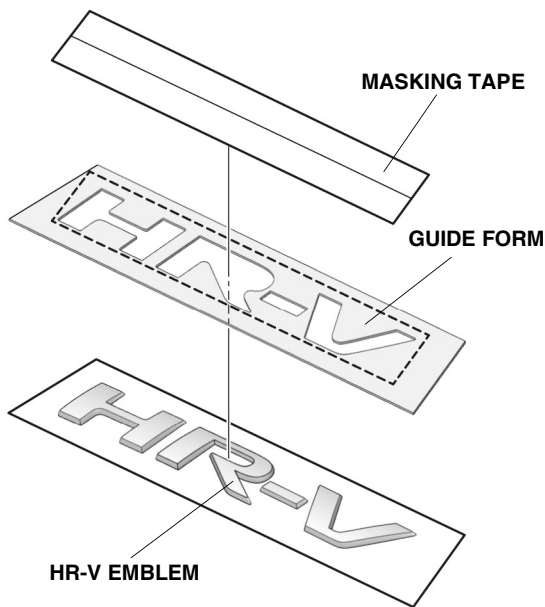


QJ01618AU

21. Using an alcohol wipe, thoroughly clean the tailgate where the HR-V emblem will attach.

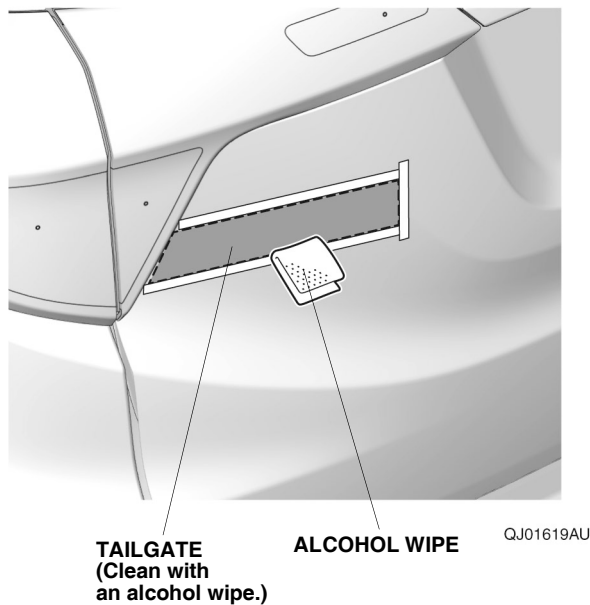


QJ01619AU

22. Remove the adhesive backing from the HR-V emblem. Line up the guide form with the masking tape, and attach the HR-V emblem to the tailgate.

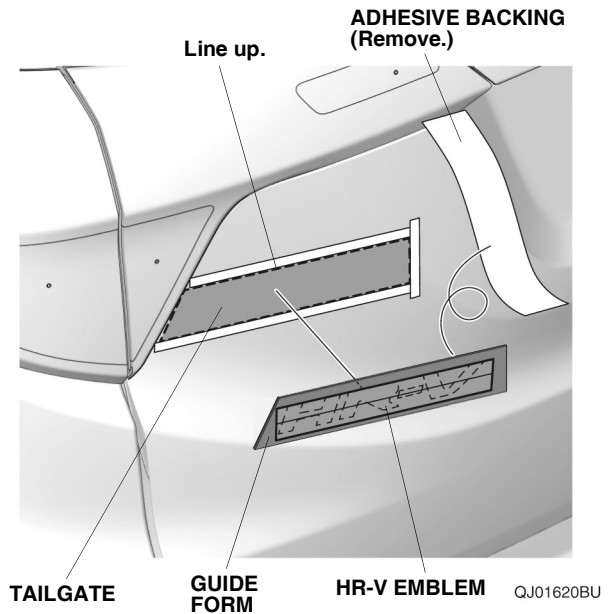

QJ01620BU

23. Remove the guide form and using the palm of your hand, firmly press the HR-V emblem against the tailgate.

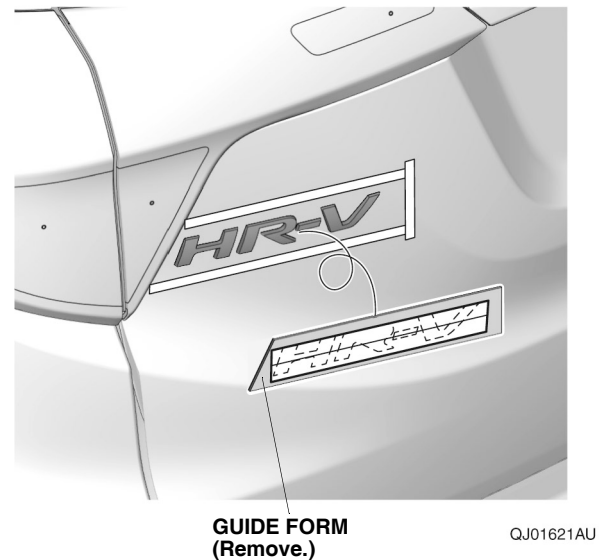


QJ01621AU

24. Remove the masking tape from the tailgate.


If the vehicle is equipped with the vehicle AWD emblem, continue with step 25; otherwise, go to step 31.

25. Attach the masking tape along the vehicle AWD emblem as shown.

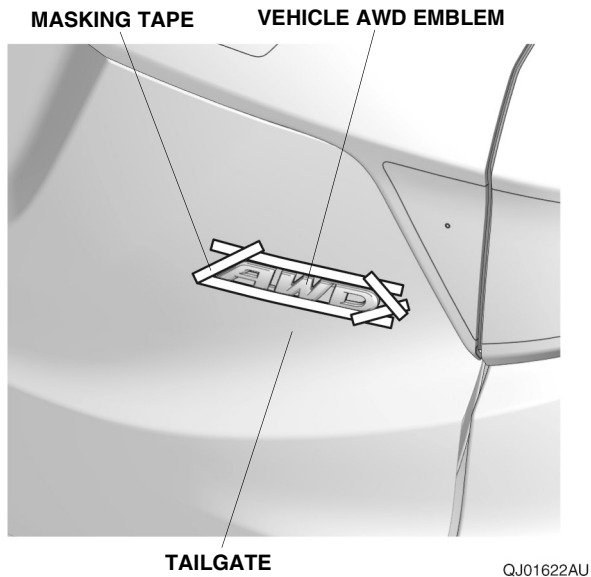


26. Using a piece of string, remove the vehicle AWD emblem by cutting along the outer edges as shown.
NOTE:


- Do not damage the vehicle body when removing the vehicle AWD emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the vehicle body.

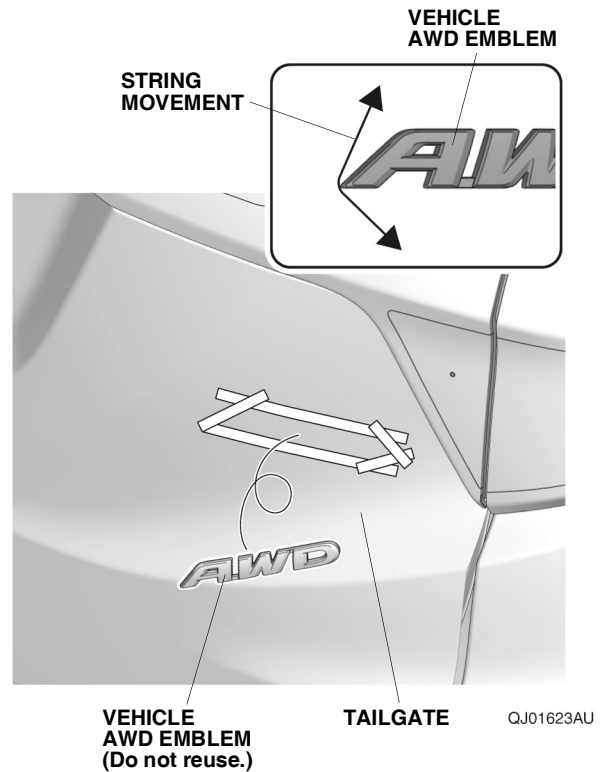

27. Using an alcohol wipe, thoroughly clean the tailgate where the AWD emblem will attach.

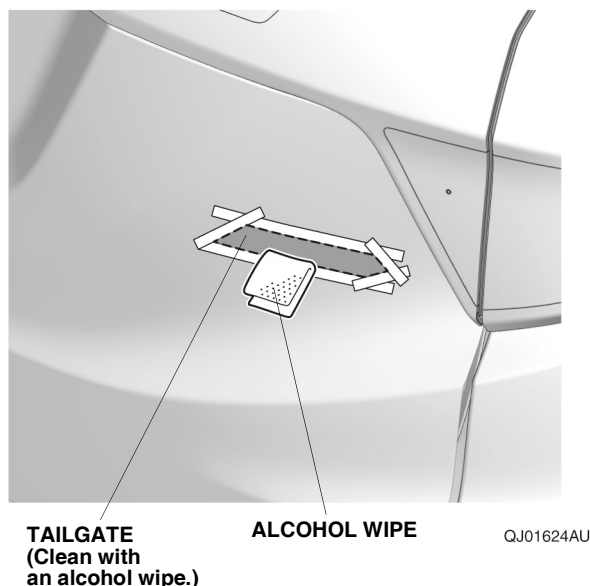


28. Remove the adhesive backing from the AWD emblem. Line up the AWD emblem with the masking tape, and attach the AWD emblem to the tailgate.

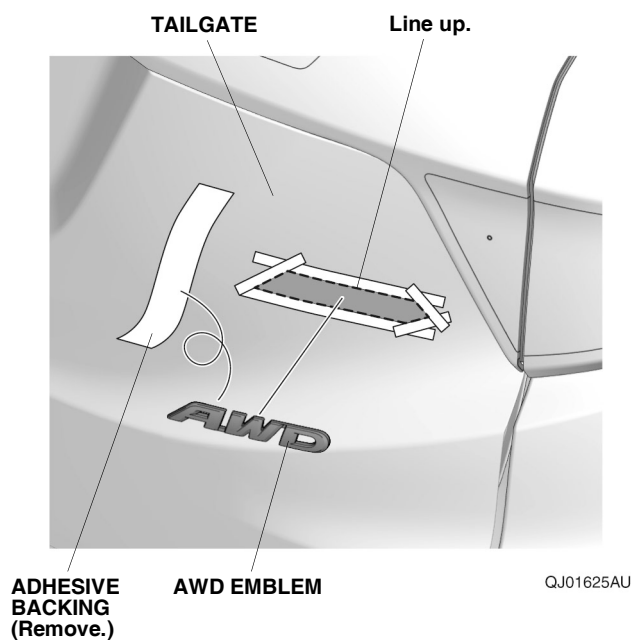


29. Using the palm of your hand, firmly press the AWD emblem against the tailgate.
30. Remove the masking tape from the tailgate.

If the vehicle is equipped with the vehicle **SPORT** emblem, continue with step 31; otherwise, go to step 42.


31. Using scissors, cut the SPORT emblem as shown.

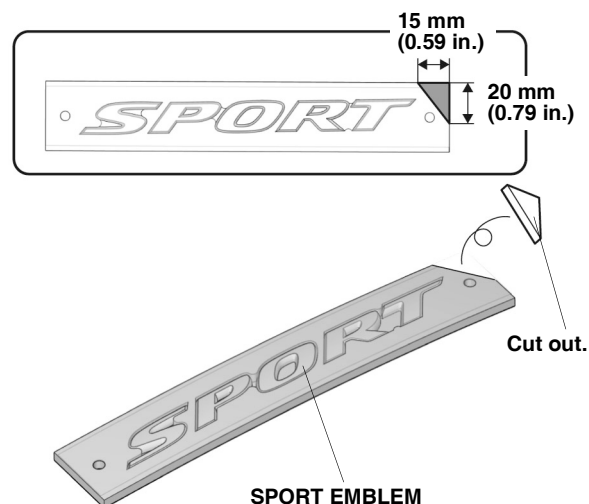


32. Remove the position film from the SPORT emblem, then remove the SPORT emblem from the guide form.

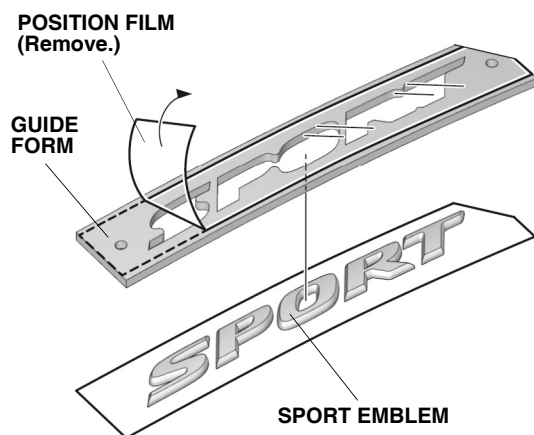


33. Install the guide form to the vehicle SPORT emblem on the tailgate.

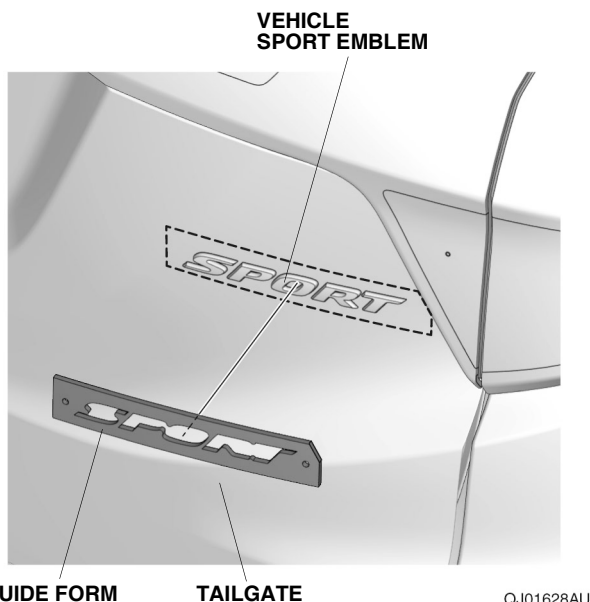

34. Attach masking tape along the guide form as shown.

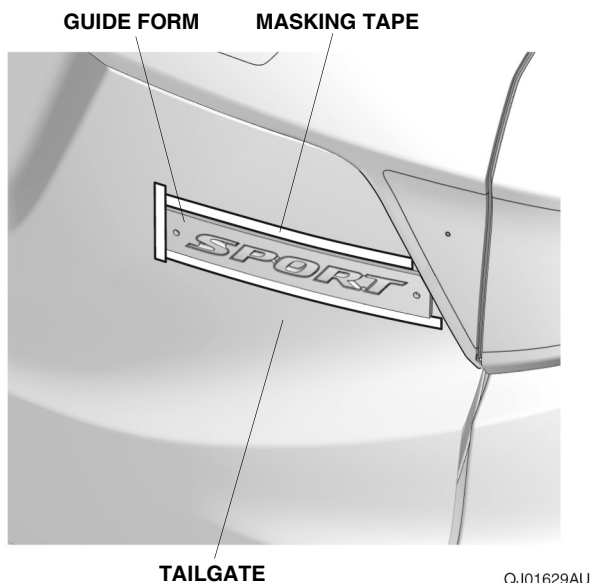


35. Remove the guide form from the tailgate.

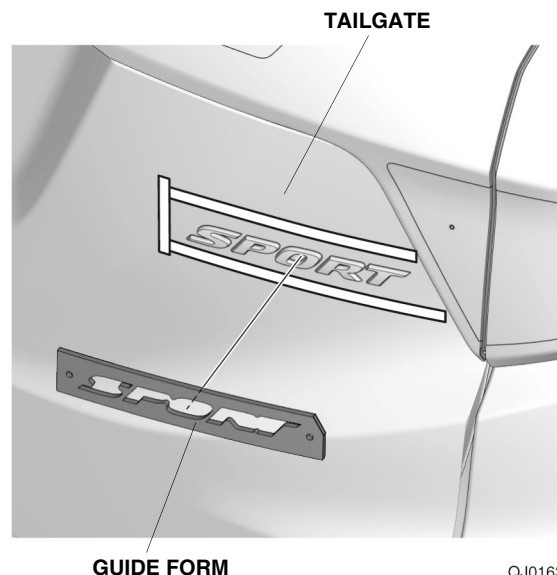


36. Using a piece of string, remove the vehicle SPORT emblem by cutting along the outer edges as shown.

- NOTE:**
- Do not damage the vehicle body when removing the vehicle SPORT emblem with the string.
 - Make sure to thoroughly remove the adhesive tape from the vehicle body.

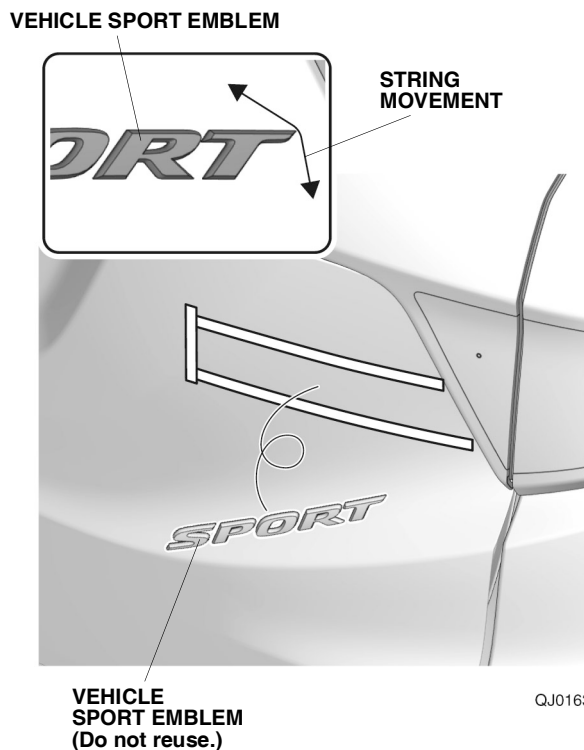


37. Install the SPORT emblem in the guide form, and temporarily secure it with masking tape.

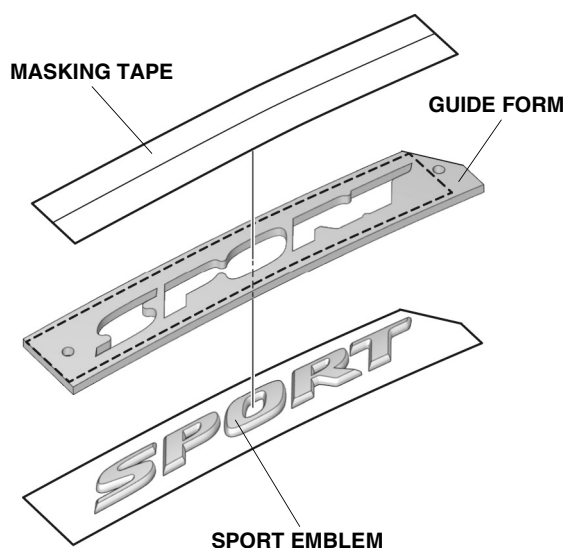


QJ01632AU

38. Using an alcohol wipe, thoroughly clean the tailgate where the SPORT emblem will attach.

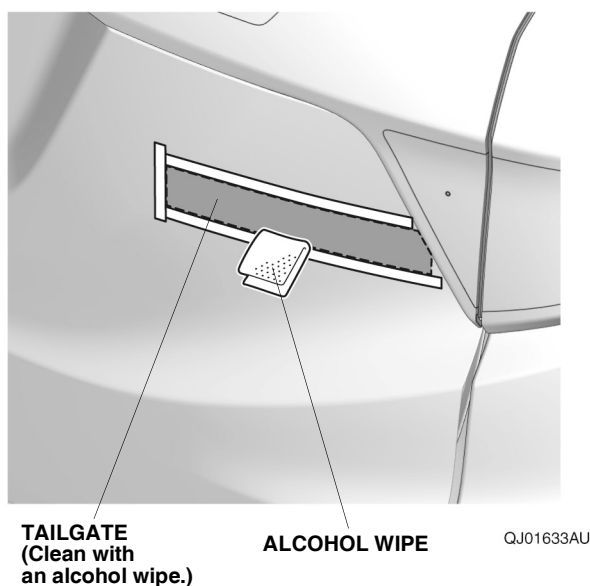


QJ01633AU

39. Remove the adhesive backing from the SPORT emblem. Line up the guide form with the masking tape, and attach the SPORT emblem to the tailgate.

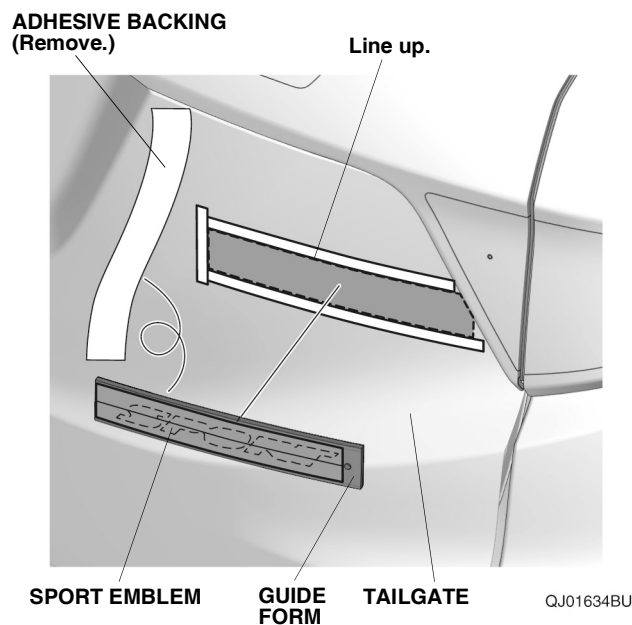

QJ01634BU

40. Remove the guide form and using the palm of your hand, firmly press the SPORT emblem against the tailgate.

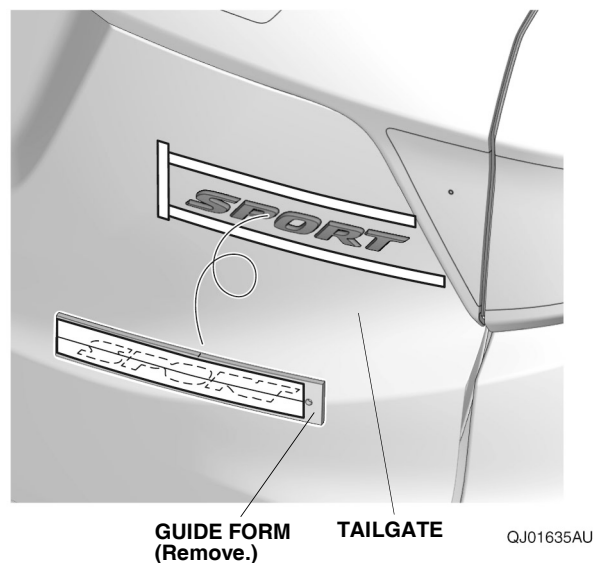

QJ01635AU

41. Remove the masking tape from the tailgate.

42. Check that all wire harnesses are routed properly and all connectors are plugged in.
43. Install all removed parts.
44. Connect the negative cable to the battery.
45. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
46. Set the clock on vehicles without navigation.
47. If necessary, restore the systems back to normal operation as described in the service information.