



HONDA INSTALLATION INSTRUCTIONS

Accessory

BLACK EMBLEM
P/N 08F20-TXM-100

Application

2022 INSIGHT

Publications No.

VERSION 1

Issue Date

MAY 2021

PARTS LIST


Front H emblem



Rear H emblem



INSIGHT emblem



4 Push nuts



3 Alcohol wipes



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

10 mm Open end wrench

6 mm, 8 mm, and 10 mm Sockets

Ratchet

Torque wrench

Masking tape

Blanket

String

Shop towel



Diagonal cutters

5 mm Hex wrench

The following tools are available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)
- Push Pin Pliers (T/N 07AAC-001A101)

Illustration of the Black Emblems Installed on the Vehicle

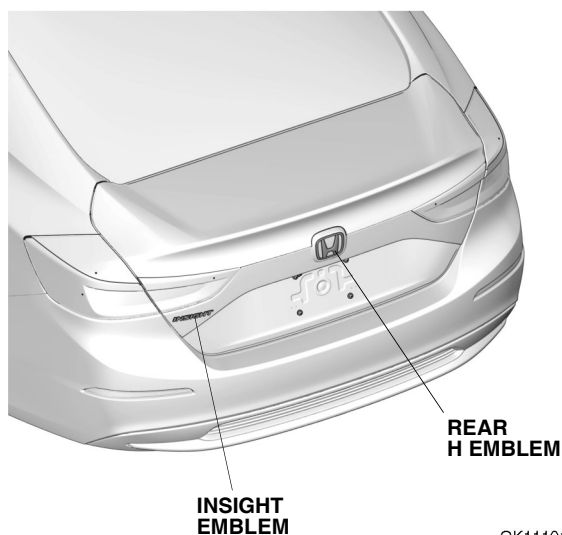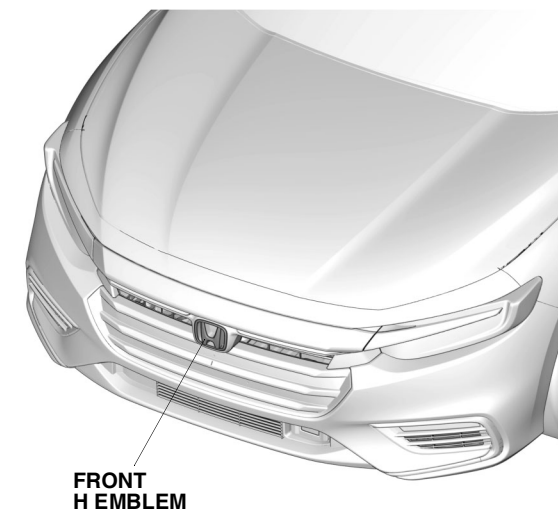

QK11101AR


INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE:


- Be careful not to damage the body paint finish.
- This kit should be installed only if the ambient air temperature is 60°F (15°C) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Make sure the customer is aware of this.

1. Remove the right side panel, and disconnect the negative cable from the battery.
NOTE: Wait 3 minutes after turning the power switch to OFF before disconnecting the battery.

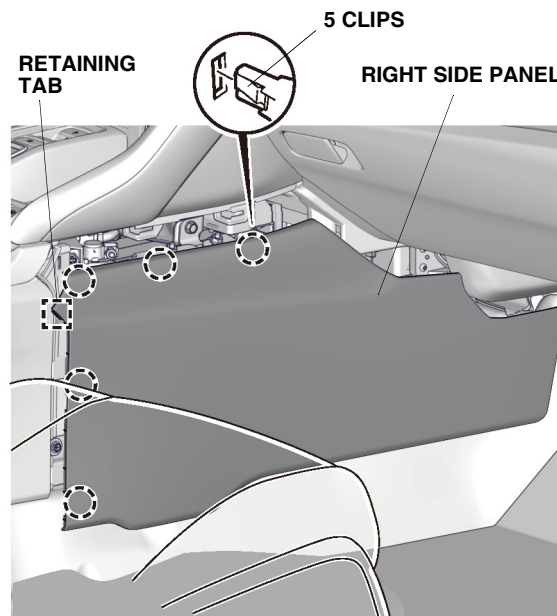


QG80701BT

2. Remove the front bumper.
 - Apply masking tape as shown.
 - Wrap a shop towel around the hood latch.

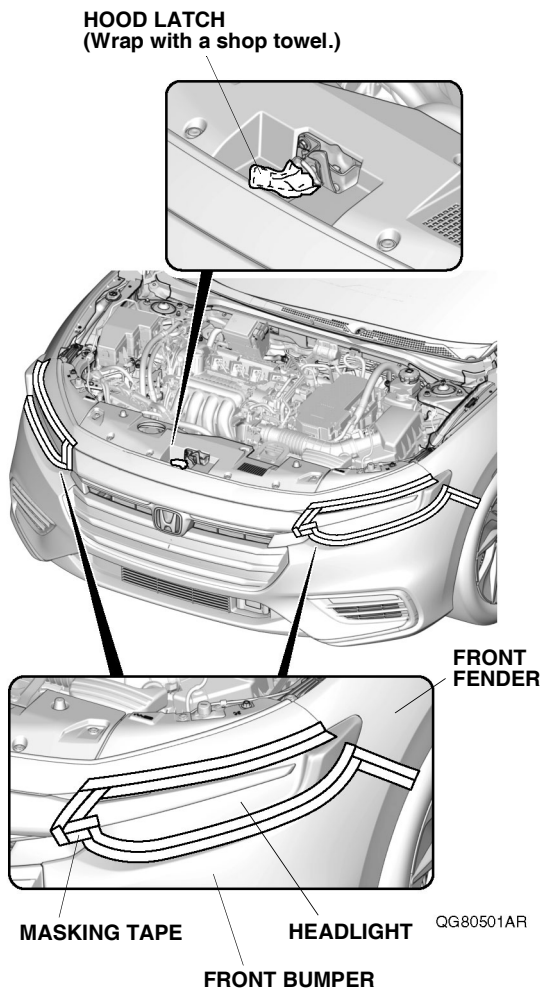


- Remove the front bulkhead cover.

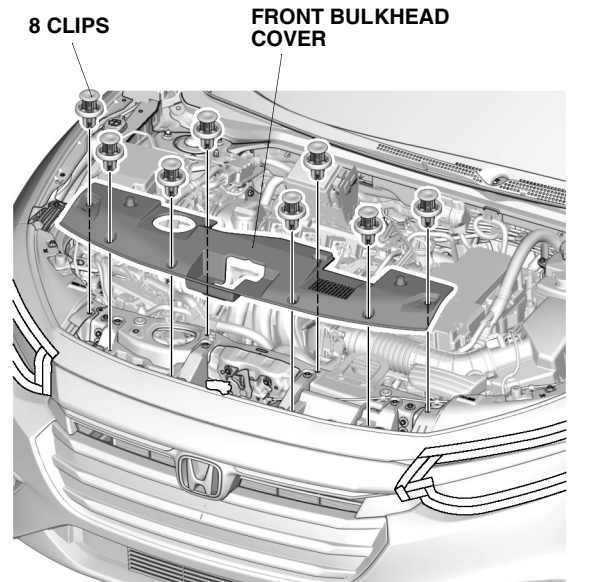


QG80502AR


- Remove the millimeter wave radar cover.

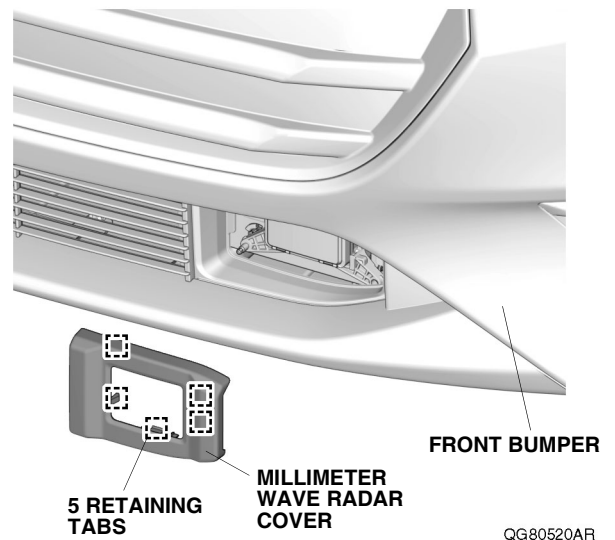


- Remove the two bolts and 12 clips.

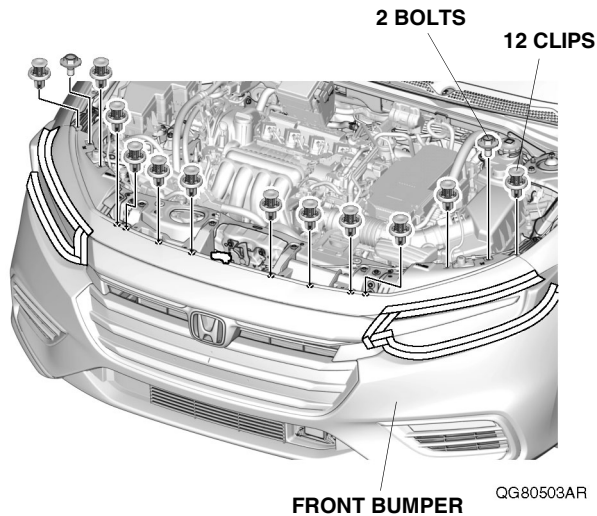


- Remove the four self-tapping screws, two hex bolts, and 11 clips.

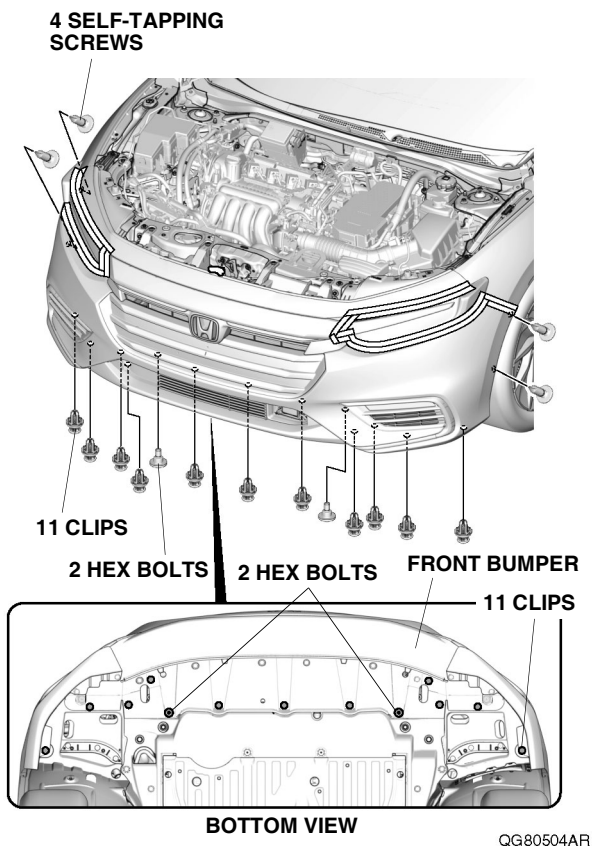


- With the help of an assistant, release the seven retaining tabs on each side.
NOTE: Remove the retaining tabs in the direction and order shown.

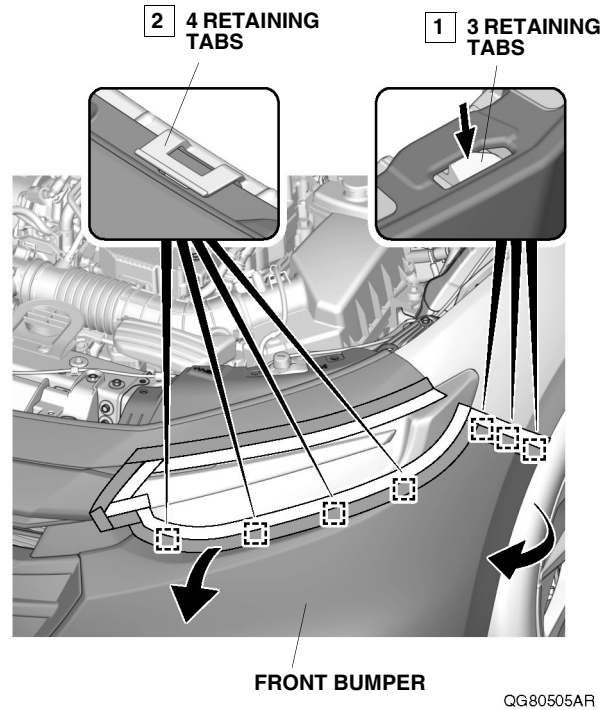


- With the help of an assistant, remove the front bumper, and unplug the vehicle connectors (if equipped). Place the front bumper on a blanket to prevent damage.

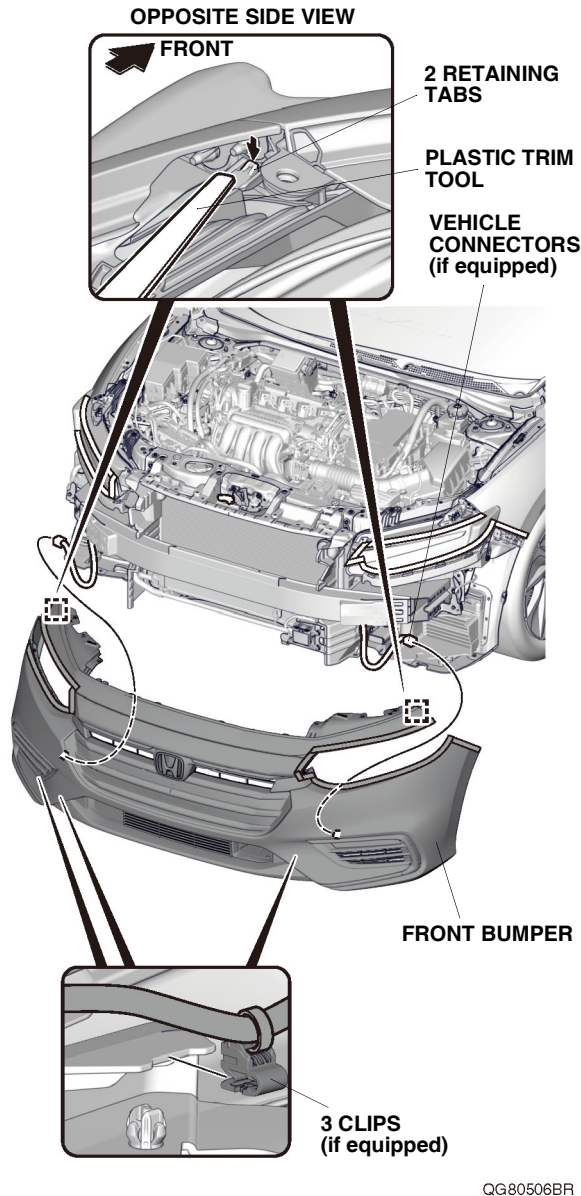


3. Open the trunk lid.

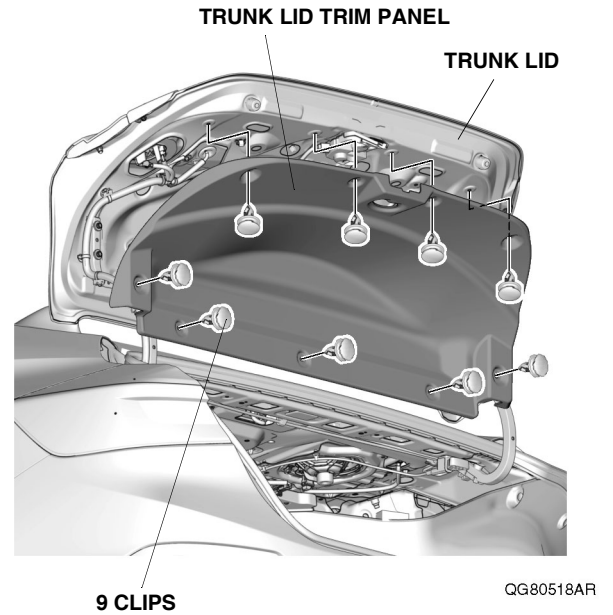

4. Remove the trunk lid trim panel.
5. Remove the four bolts.

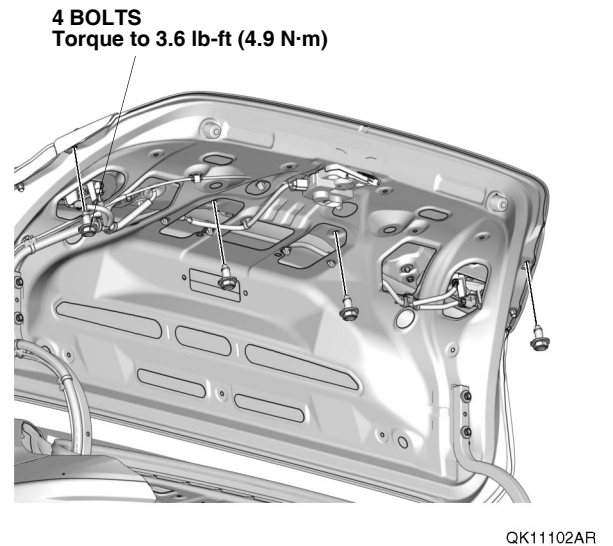


- Release the clips, remove the rear license plate trim, and unplug the vehicle connectors.

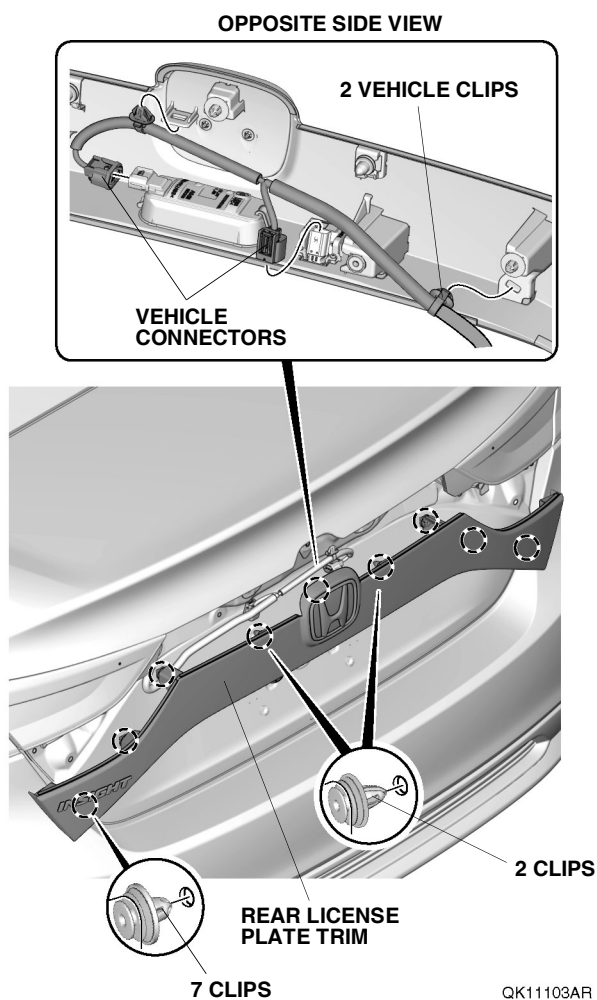


Installing the Black Emblems


- Remove the front grille from the front bumper.

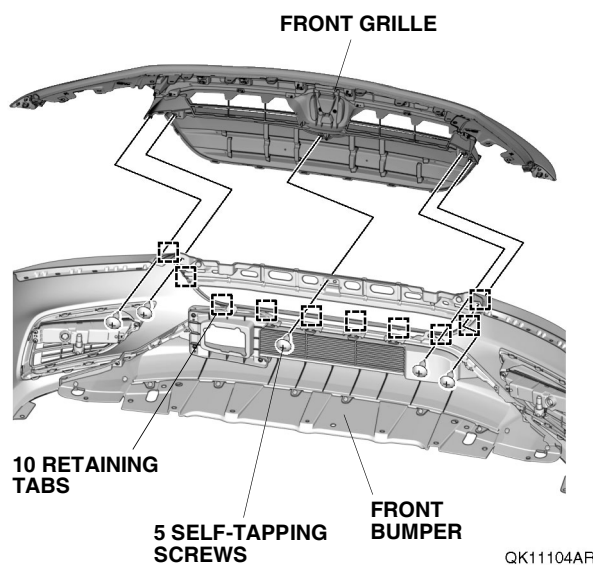

- Remove the front H emblem from the front grille.

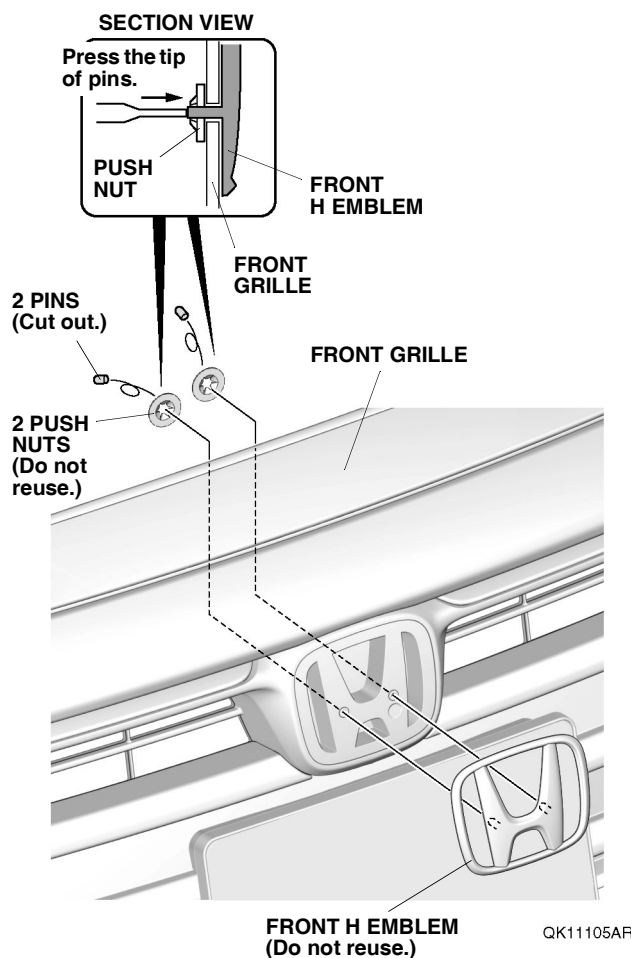


9. Using an alcohol wipe, thoroughly clean the front grille where the front H emblem will attach.

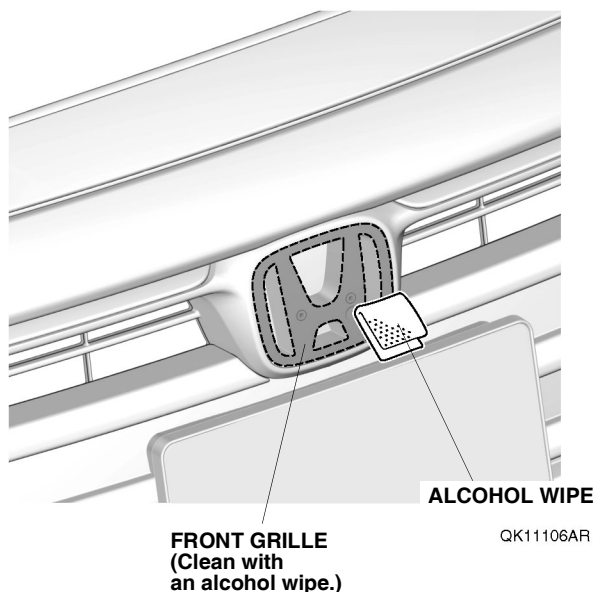


10. Remove the four adhesive backings from the front H emblem. Install the front H emblem to the front grille as shown.

NOTE: Check the orientation of the push nuts.

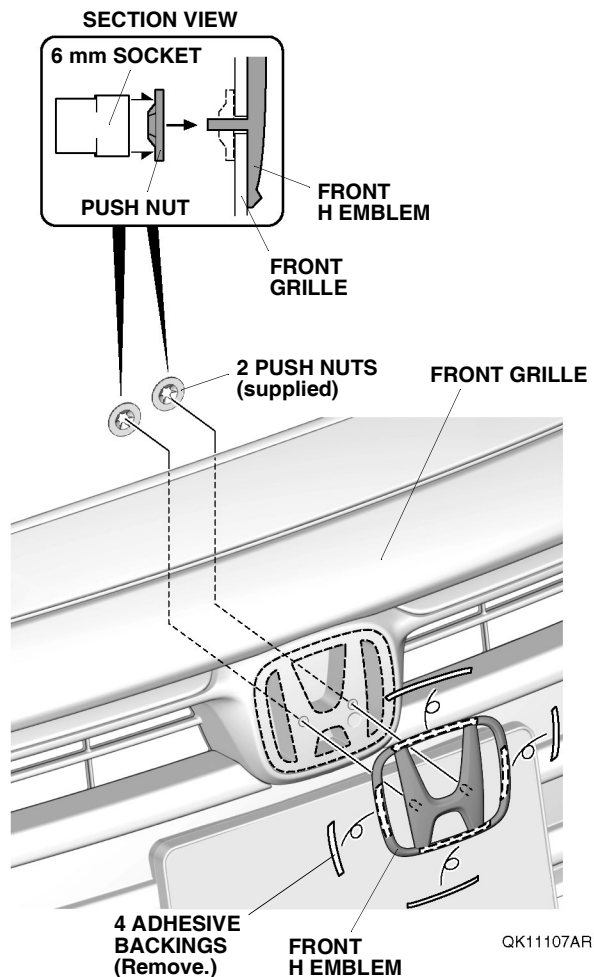


11. Using the palm of your hand, firmly press the front H emblem against the front grille for 30 seconds.

12. Remove the rear H emblem from the rear license plate trim.

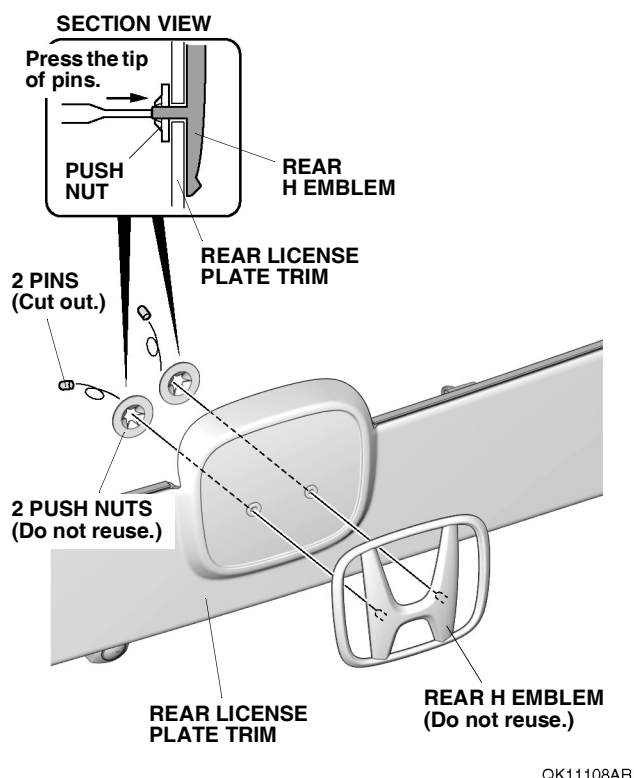


13. Using an alcohol wipe, thoroughly clean the rear license plate trim where the rear H emblem will attach.

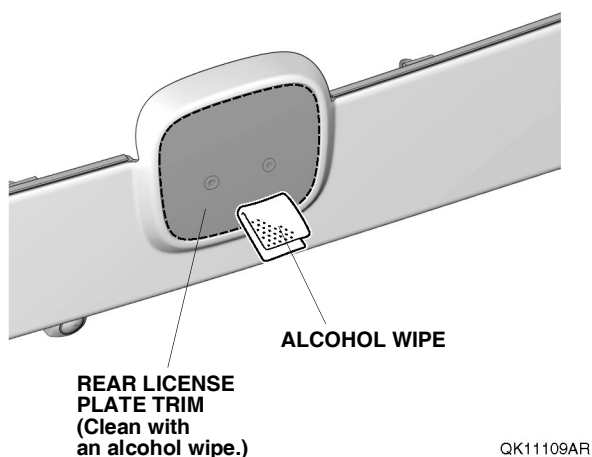


14. Remove the four adhesive backings from the rear H emblem. Install the rear H emblem to the rear license plate trim as shown.

NOTE: Check the orientation of the push nuts.

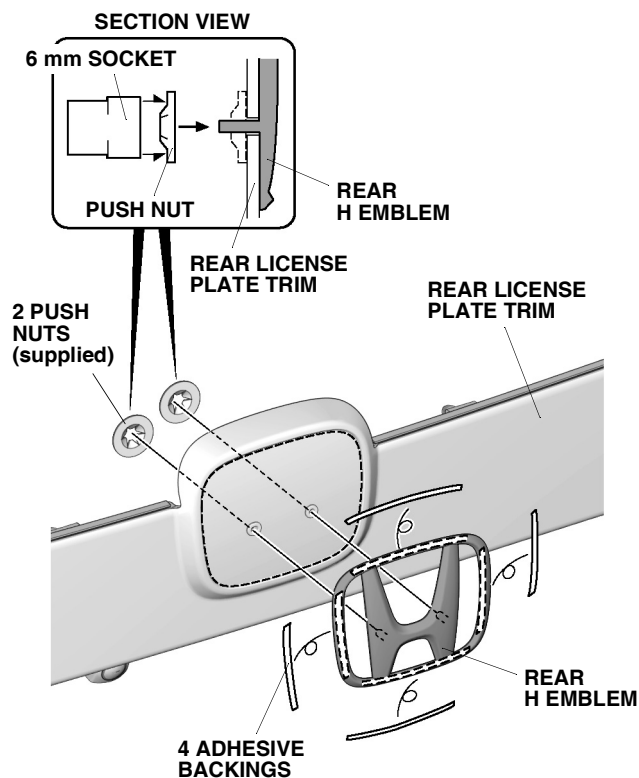


15. Using the palm of your hand, firmly press the rear H emblem against the rear license plate trim for 30 seconds.
16. Remove the position film from the INSIGHT emblem, then remove the INSIGHT emblem from the guide form.

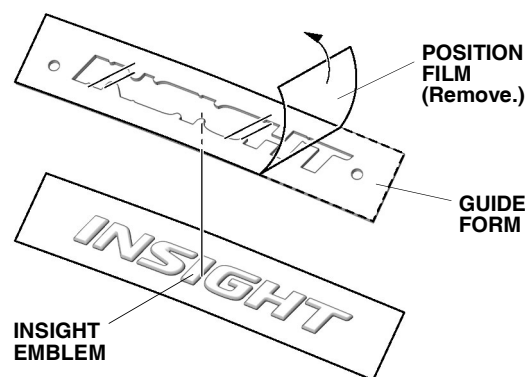


QK11112AR

17. Install the guide form to the INSIGHT emblem on the rear license plate trim.

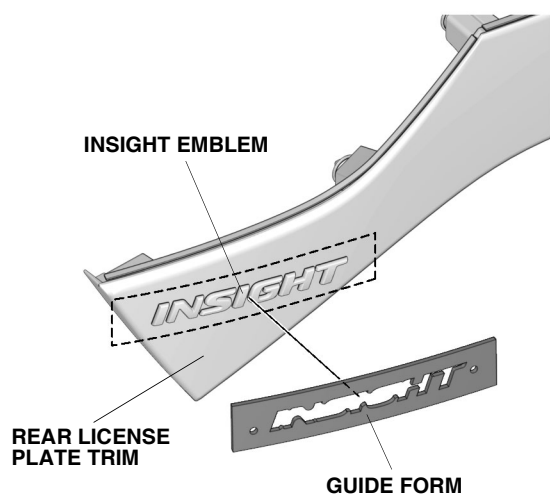


QK11113AR

18. Attach masking tape along the guide form as shown.

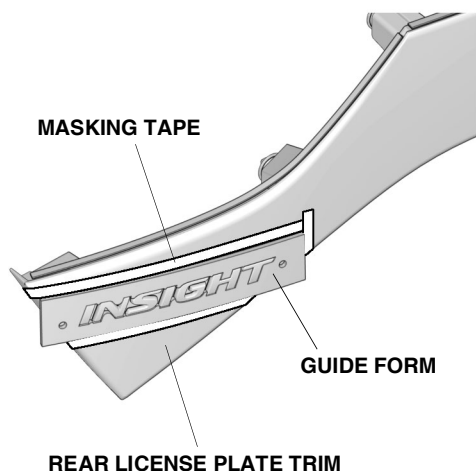

QK11114AR


19. Remove the guide form from the rear license plate trim.

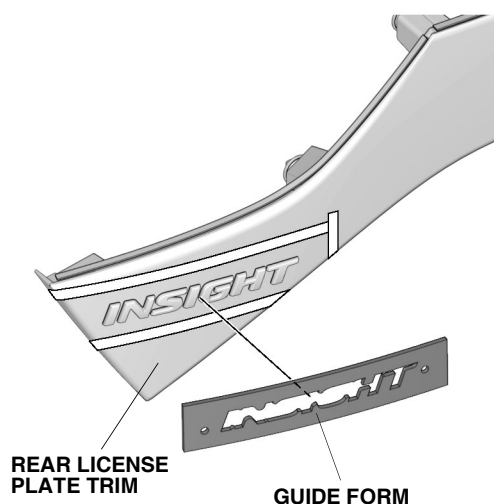

QK11115AR


20. Using a piece of string, remove the INSIGHT emblem by cutting along the outer edges as shown.
NOTE:

- Do not damage the rear license plate trim when removing the INSIGHT emblem with the string.
- Make sure to thoroughly remove the adhesive tape from the rear license plate trim.

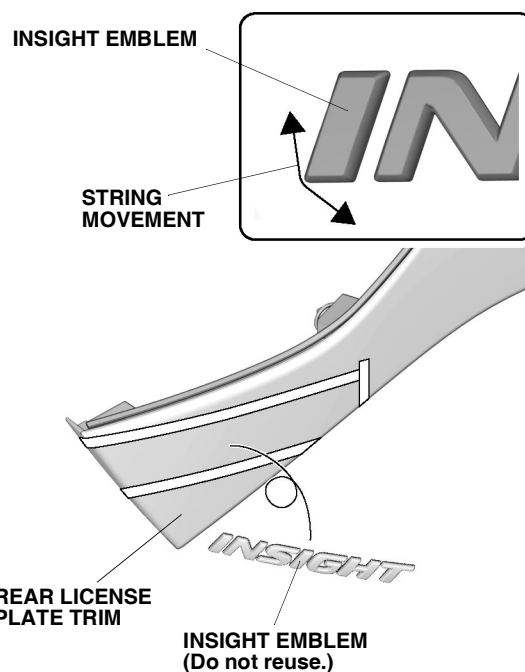


QK11116AR

21. Install the INSIGHT emblem in the guide form, and temporarily secure it with masking tape.

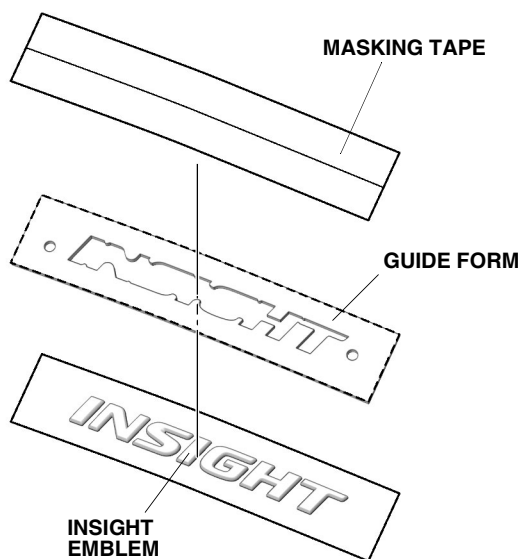


QK11117AR

22. Using an alcohol wipe, thoroughly clean the rear license plate trim where the INSIGHT emblem will attach.

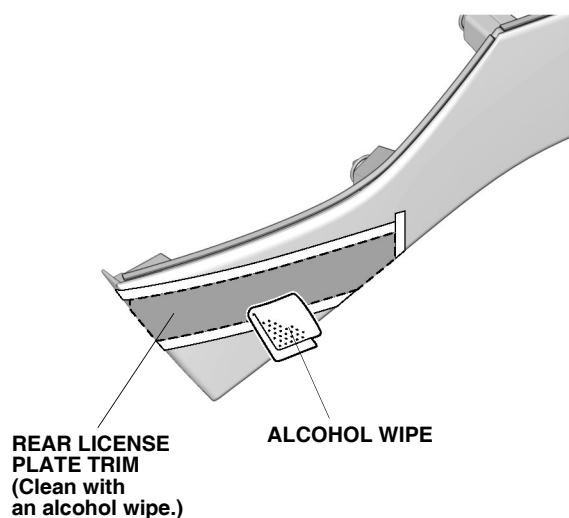


QK11118AR

23. Remove the adhesive backing from the INSIGHT emblem. Line up the guide form with the masking tape, and attach the INSIGHT emblem to the rear license plate trim.

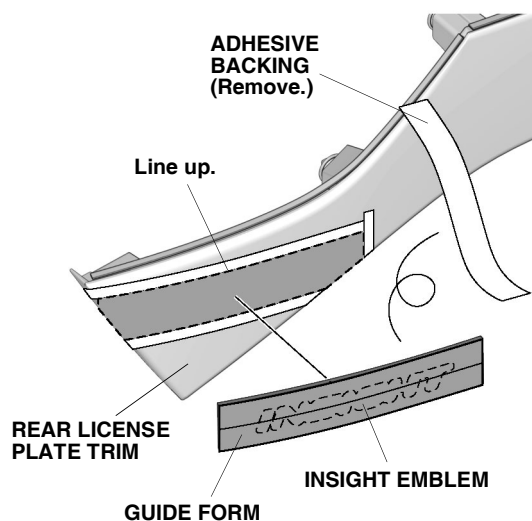

QK11119AR

24. Remove the guide form and using the palm of your hand, firmly press the INSIGHT emblem against the rear license plate trim for 30 seconds.

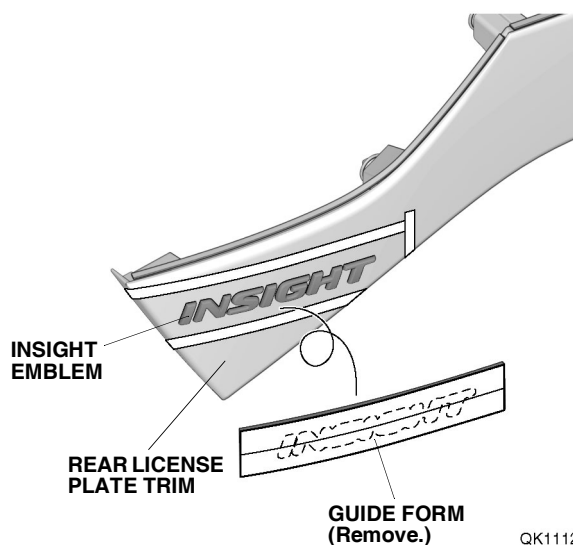

QK11120AR

25. Remove the masking tape from the rear license plate trim.

26. Check that all wire harnesses are routed properly and all connectors are plugged in.
27. Install all removed parts except for the right side panel.
28. Connect the negative cable to the battery.
29. Install the right side panel.
30. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
31. Set the clock on vehicles without navigation.
32. If necessary, restore the systems back to normal operation as described in the service information.