



HONDA INSTALLATION INSTRUCTIONS

Accessory

CROSSBARS
P/N 08L04-THR-100

Application

2021 ODYSSEY

Publications No.

VERSION 1

Issue Date

JUL 2020

PARTS LIST

Front crossbar (long)



Rear crossbar (short)



8 Bolts



TOOLS AND SUPPLIES REQUIRED

Ratchet

Torque wrench


T-30 TORX bit

INSTALLATION


NOTE:

- The weight of the cargo must not exceed the maximum weight capacity of 75 kg (165 lbs).
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the crossbars.


- Remove four plastic screws from the left roof rail and the right roof rail.

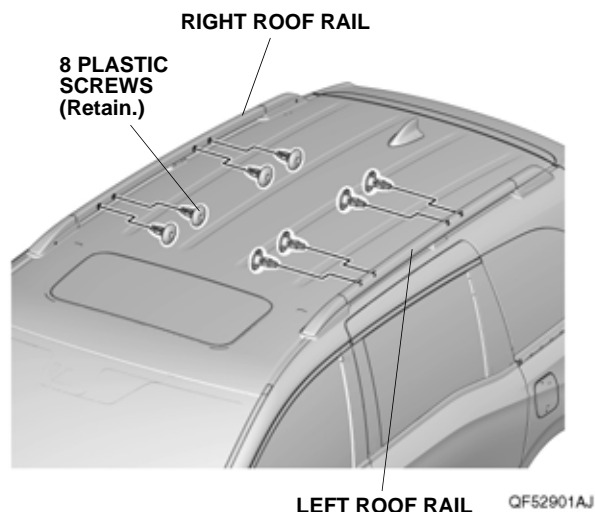

- Install the front crossbar with four bolts. Torque the bolts to 10 N·m (7.4 lb-ft).

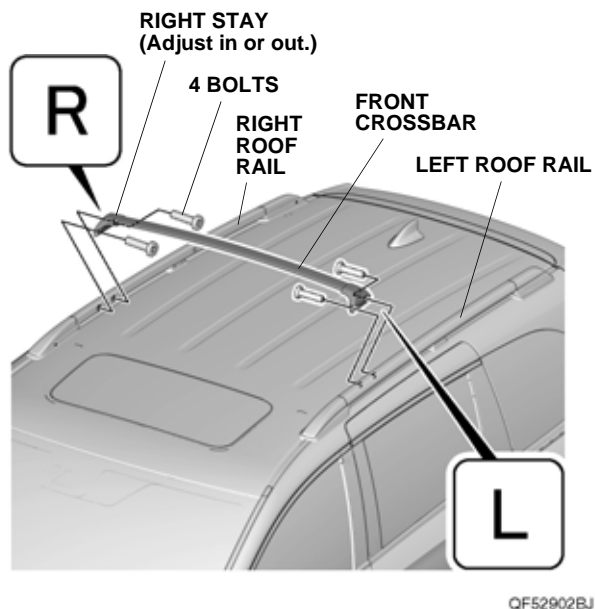

3. Install the rear crossbar with four bolts. Torque the bolts to 10 N·m (7.4 lb·ft).

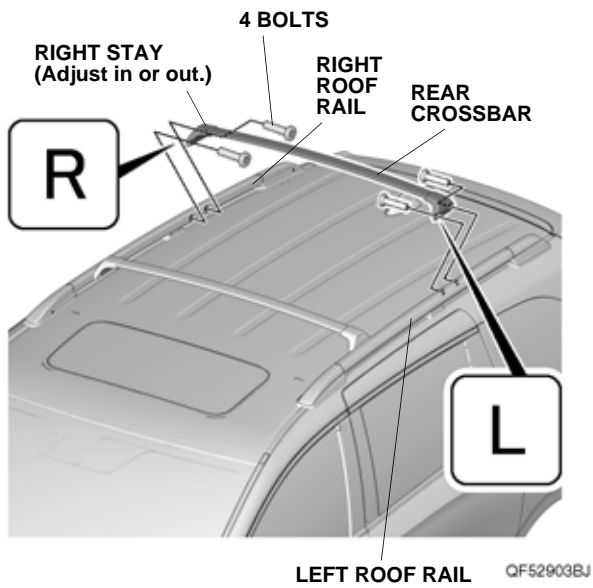

Put a copy of this page in the glove box for your customer.

USE AND CARE

- Check the roof rail mounting bolts frequently, and retighten if necessary. Torque the bolts to 7 lb·ft (10 N·m).
- Distribute the weight of the cargo evenly, and do not exceed the maximum weight capacity of 165 lbs (75 kg).