



INSTALLATION INSTRUCTIONS


Accessory
CROSSBARS
P/N 08L04-THR-100

Application
2022 ODYSSEY


Publications No.
VERSION 1
Issue Date
JAN 2021

PARTS LIST

Front crossbar (long)



Rear crossbar (short)



8 Bolts



TOOLS AND SUPPLIES REQUIRED

Ratchet

Torque wrench


T-30 TORX bit

INSTALLATION

NOTE:


- The weight of the cargo must not exceed the maximum weight capacity of 75 kg (165 lbs).
- Be extremely careful not to damage the roof and other finished surfaces of the body when installing the crossbars.

1. Remove four plastic screws from the left roof rail and the right roof rail.

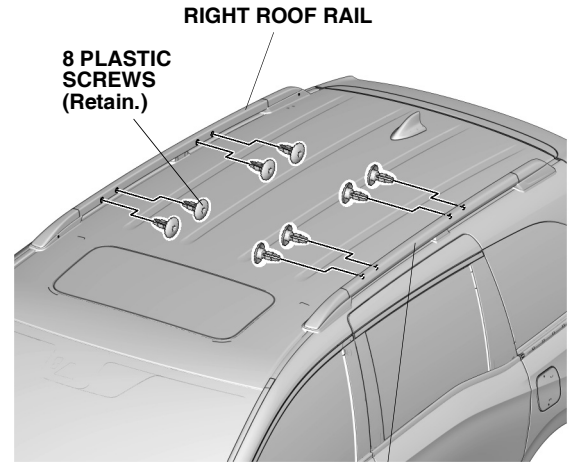


LEFT ROOF RAIL QF52901AJ

2. Install the front crossbar with four bolts. Torque the bolts to 10 N·m (7.4 lb-ft).

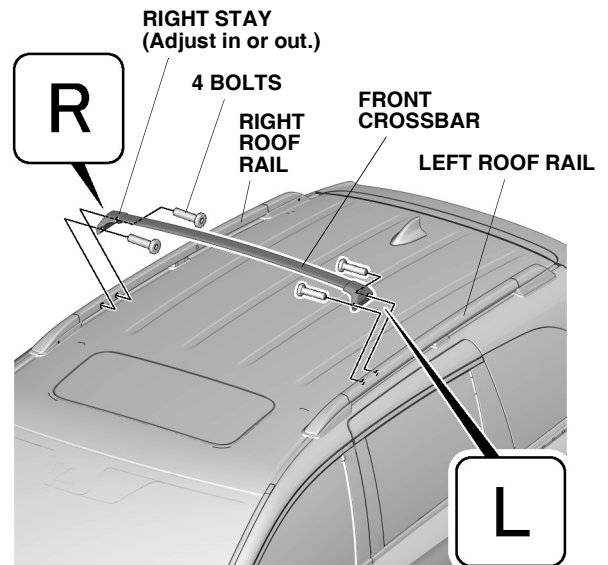

QF52902BJ

3. Install the rear crossbar with four bolts. Torque the bolts to 10 N·m (7.4 lb·ft).

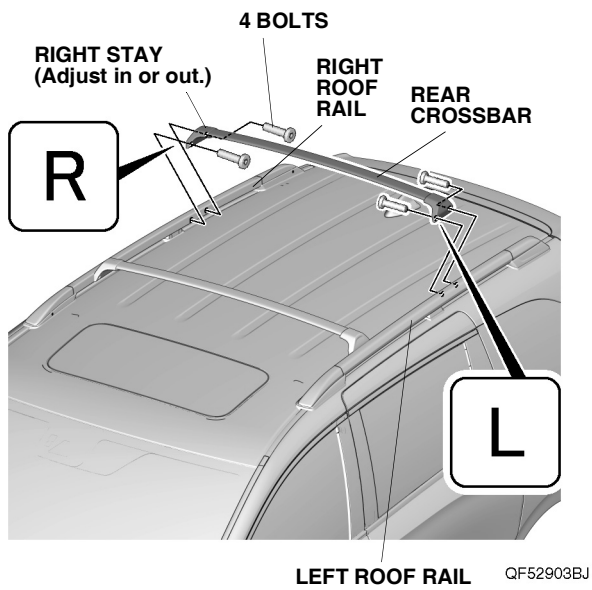

Put a copy of this page in the glove box for your customer.

USE AND CARE

- Check the roof rail mounting bolts frequently, and retighten if necessary. Torque the bolts to 7 lb·ft (10 N·m).
- Distribute the weight of the cargo evenly, and do not exceed the maximum weight capacity of 165 lbs (75 kg).