



HONDA INSTALLATION INSTRUCTIONS

Accessory
AUTOMATIC DAY/NIGHT
MIRROR


Application
2022 ODYSSEY

Publications No.
VERSION 1
Issue Date
JAN 2021

PARTS LIST

Automatic Day/Night Mirror Kit
P/N 76400-THR-A42

Automatic Day/Night mirror




TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
10 mm Open end wrench
Small flat-tip screwdriver
Shop towel

The following tools are available through the Honda Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

Illustration of the Automatic Day/Night Mirror on the Vehicle

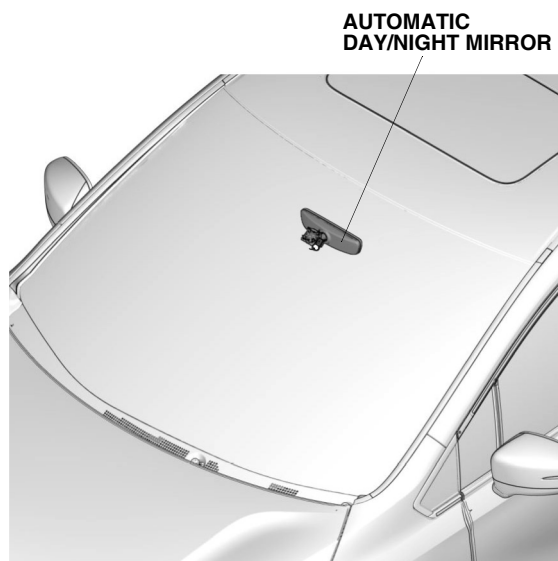



QJ91901BX

INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."


1. Disconnect the negative cable from the battery:
 - Wrap a shop towel around the hood latch lever.

HOOD LATCH LEVER
(Wrap with a shop towel.)

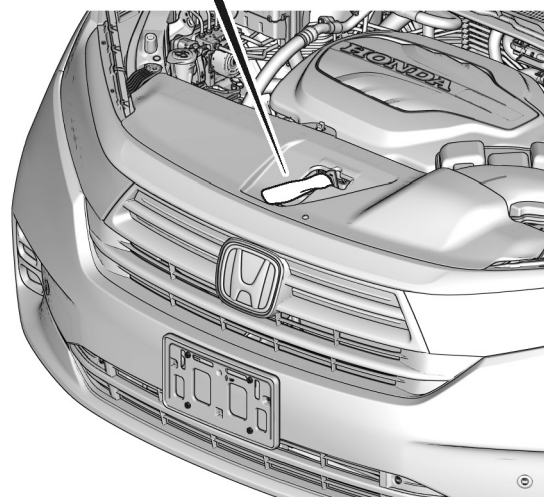


QJ92002AB

- Remove the front bulkhead cover.

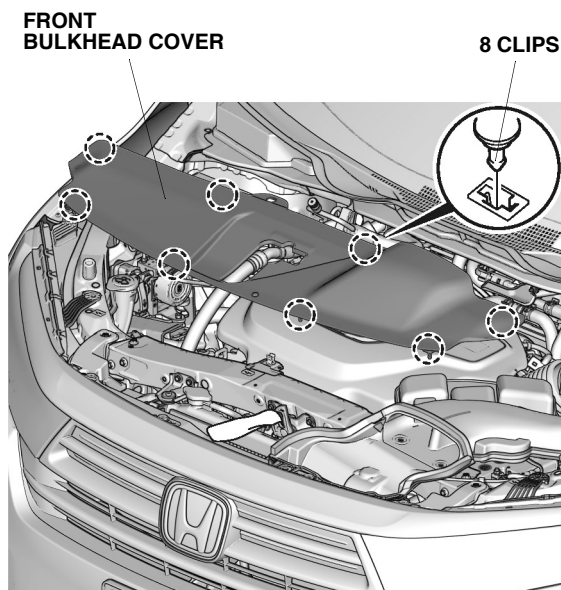

QJ92003AB


- Remove the intake air tube.
- Disconnect the negative cable from the battery.

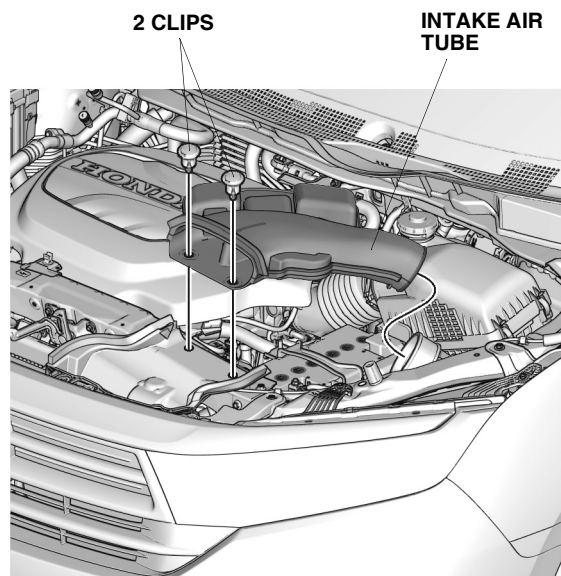

QJ92004AB


- Remove the roof console:

- Using a small flat-tip screwdriver wrapped with a shop towel, pry out and remove the left and right lenses.
- Open the sunglass holder, and remove the four screws.
- Remove the roof console, and unplug the vehicle connectors.

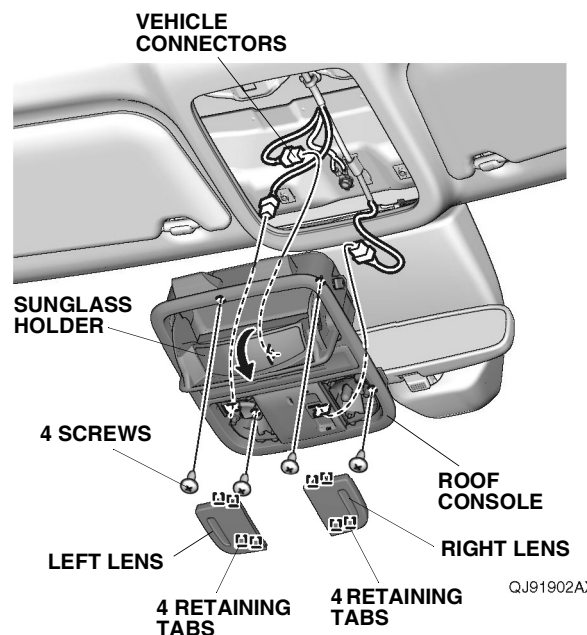


QJ91902AX

- Remove the camera cover lid.

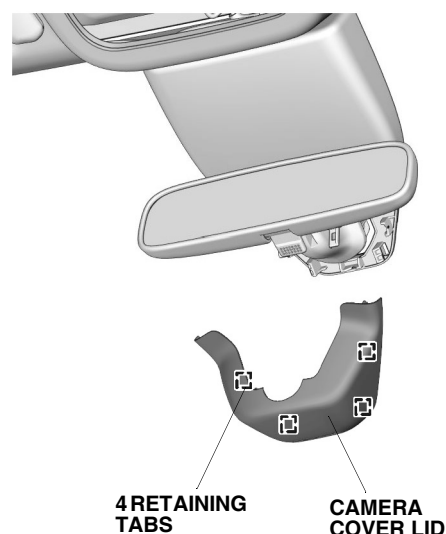


QJ91903AX

4. Remove the camera cover.

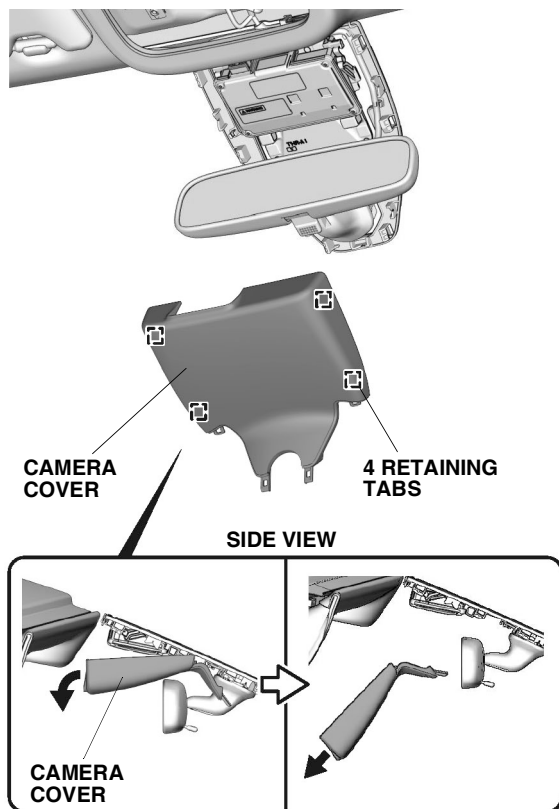


QJ91904AX

5. Remove the rearview mirror as shown.

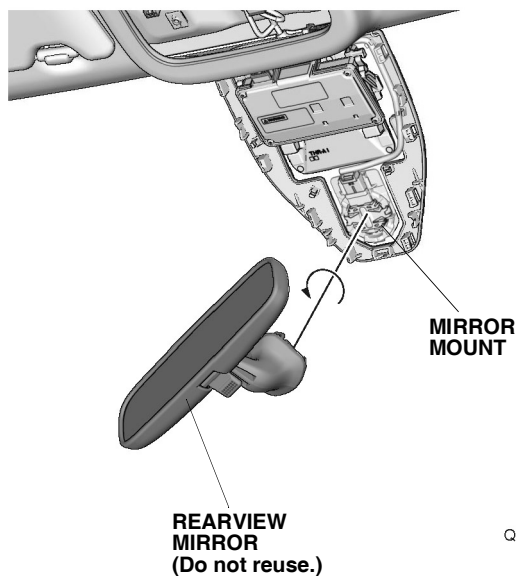


QJ92001AX

6. Remove the tape to free the vehicle 8-pin connector.

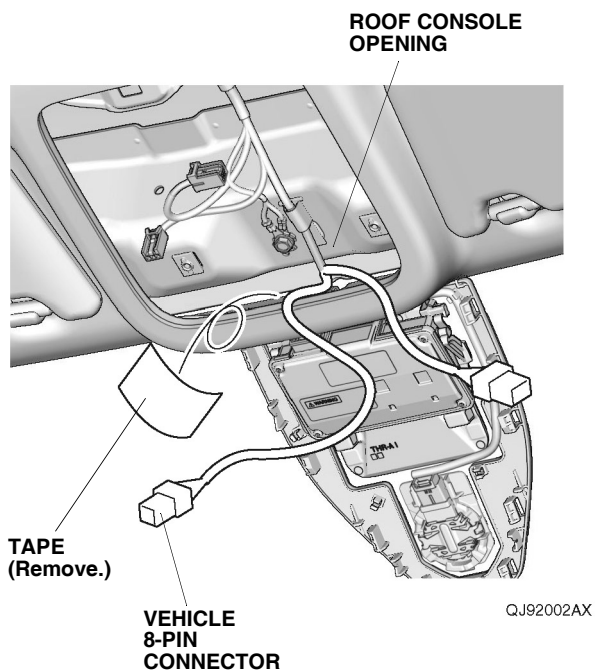


QJ92002AX

7. Install the automatic day/night mirror to the mirror mount as shown.

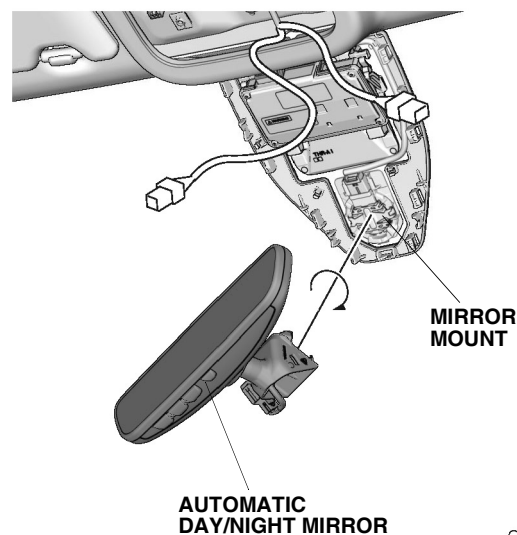

QJ92003AX

8. Route the vehicle harness through the cutout on the headliner.
NOTE: Be careful not to crease the headliner.

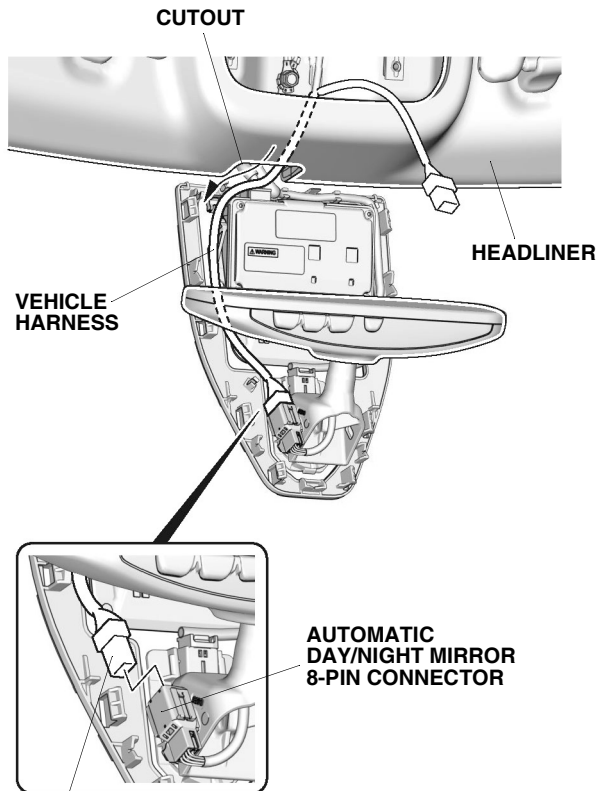


VEHICLE 8-PIN CONNECTOR

QJ92004AX

9. Plug the vehicle 8-pin connector into the automatic day/night mirror 8-pin connector.

10. Secure the vehicle harness to the four holders on the sensor cover base as shown.
NOTE: Make sure that the vehicle harness are not pinched.

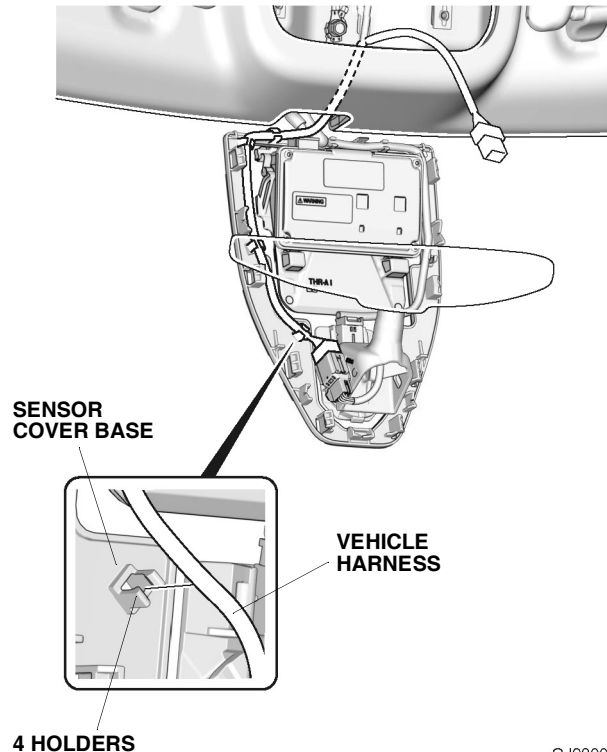

QJ92005AX

11. Check that all wire harnesses are routed properly and all connectors are plugged in.
12. Install all removed parts except for the front bulkhead cover and the intake air tube.
13. Connect the negative cable to the battery.
14. Install the front bulkhead cover and the intake air tube.
15. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
16. Set the clock on vehicles without navigation.
17. If necessary, restore the systems back to normal operation as described in the service information.

Check the Operation of the Automatic Day/Night Mirror

18. Check that the automatic day/night mirror work properly as described in the Owner's Manual of the vehicle.