



Cargo Cover
User's Information Manual

PASSPORT

Introduction

Thank you for purchasing this Honda accessory.

Please read this manual carefully before using the cargo cover. Keep it in the glove box for future reference.

This product is designed to be used exclusively on a Honda PASSPORT. Honda is not responsible if the product is used for anything other than its intended purpose.

This manual should be considered a permanent part of the vehicle. It should remain with the vehicle at all times and stay with the vehicle when sold.

A Few Words About Safety

Your safety, and the safety of others, is very important. Operating your vehicle's accessory safely is an important responsibility.

To help you make informed decisions about safety, we have provided operating procedures and other information on labels in the vehicle owner's manual and in this manual.

This information alerts you to potential hazards that could hurt you or others.

Of course, it is not practical or possible to warn you about all the hazards associated with operating or maintaining your vehicle. You must use your own good judgment.

For your safety and safety of others, pay special attention to all warning symbols. Failure to follow the warnings contained in this manual can result in damage to your vehicle, serious injury, or death.

A Few Words About Safety

Warning Symbols

DANGER

You **WILL** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

WARNING

You **CAN** be **KILLED** or **SERIOUSLY HURT** if you don't follow instructions.

CAUTION

You **CAN** be **HURT** if you don't follow instructions.


NOTICE

You **CAN** damage your vehicle, other property or the environment.

Installing/Removing the Cargo Cover

I To Install


- 1 Insert the rod into the front retention groove at an angle.

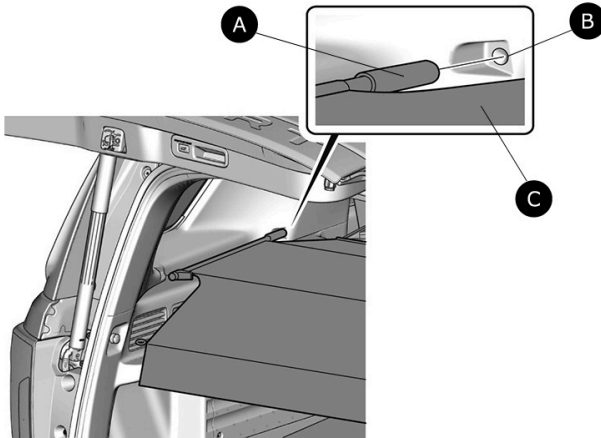

A	ROD
B	FRONT RETENTION GROOVE
C	CARGO COVER

Installing/Removing the Cargo Cover

- 2 Continue pushing the thumb tab to compress the rod. Rotate the compressed rod into the rear retention groove. Allow the rod to decompress into the rear retention groove.

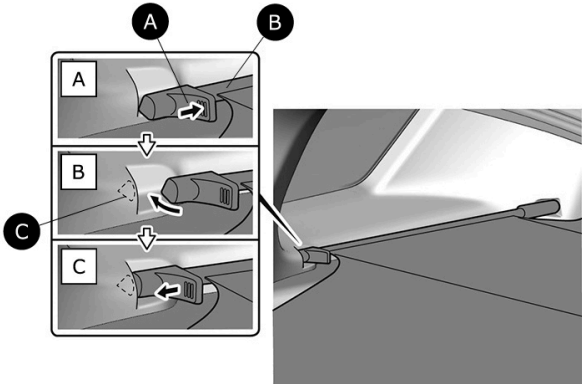


A	Compress.
A	THUMB TAB
B	ROD
B	Rotate.
C	REAR RETENTION GROOVE
C	Decompress.

- 3 Repeat steps 1 and 2 on the other side.

Installing/Removing the Cargo Cover


- 4** Raise the right and left head restraints, then attach the hooks to each side. Raise the center head restraint and attach the hook to the left side. Access the cargo cover from the rear doors if necessary.

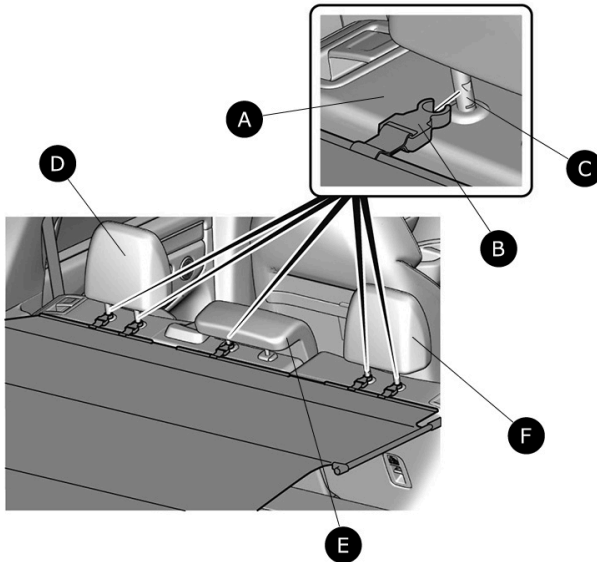

A	REAR SEATS
B	HOOK(5)
C	HEAD RESTRAINT STAY(5)
D	LEFT HEAD RESTRAINT
E	CENTER HEAD RESTRAINT
F	RIGHT HEAD RESTRAINT

Installing/Removing the Cargo Cover

- 5 Attach the loops to the side hooks for both sides.

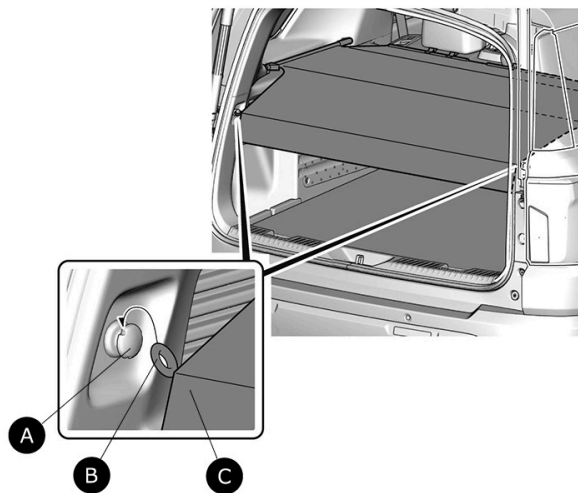

A	SIDE HOOK(2)
B	LOOP(2)
C	CARGO COVER

■ To Remove

Remove the cargo cover in the reverse order of installation.



NOTICE

- To prevent the cargo cover damage:
 - Do not place items on the cargo cover.
 - Do not put weight on the cargo cover.
 - Do not remove the left/right retention rods or head restraints hooks by pulling on the cargo cover fabric.

MEMO

MEMO

