
HONDA

INSTALLATION INSTRUCTIONS

JAN. 2025

DOOR VISORS 2026 PASSPORT Publications No. VERSION 1

GENERAL VIEW

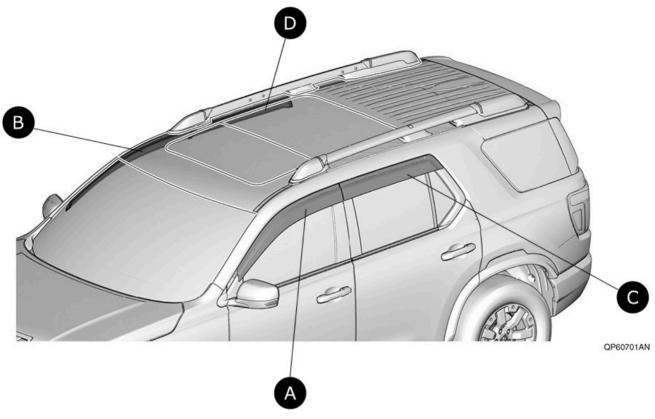

A	LEFT FRONT DOOR VISOR
B	RIGHT FRONT DOOR VISOR
0	LEFT REAR DOOR VISOR
D	RIGHT REAR DOOR VISOR

FOR YOUR SAFETY (Read carefully.)

Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

*All symbols are not used in all installation instructions.

DANGER

You will be killed or seriously hurt if you do not follow the instructions.

▲ WARNING

You can be killed or seriously hurt if you do not follow the instructions.

A CAUTION

You can be hurt if you do not follow the instructions.

MOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

■ NOTE

Gives helpful information or instructions to be followed when installing this product.



Indicates a prohibited action.

Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle. (Instrument panel.)

	Wear eye protection.		Wear heavy gloves.
ķ ─¾	Use an assistant.		Place the part on a blanket.
1 90°	Work perpendicular.	***	Remove any burrs.
	Use touch-up paint and allow to dry.	lb-ft	Tighten to the specified torque.
5,0	Apply firm pressure while rolling, especially at the ends, to set the adhesive.	4>	Press firmly.
	Clean with isopropyl alcohol.		Return the original part to the customer. (Do not reuse.)

Safety: General

- Visors may not be legal in all states. Please check the laws of your state.
- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and safety of others.
- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts.
- The illustrations may differ slightly from the actual accessory.

Safety: Accessory

- Do not shock or impact the accessories.
- Be careful this accessory can easily be damaged by solvent or contact cleaner.
- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60°F (15°C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle for 24 hours to allow the adhesive to cure.

PARTS LIST

■ Door Visors Kit (P/N 08R04-T90-100)

Parts	Parts name	QTY	Remarks
	Left front door visor	1	
	Right front door visor	1	
	Left rear door visor	1	
	Right rear door visor	1	
	Bracket	8	
	Clip	8	
	Alcohol wipe	4	

REQUIRED TOOLS AND SUPPLIES

- · Masking tape
- Ruler
- · Soft towel


The following tool is available through the Honda Tool and Equipment Program: Rubber Roller (T/N MHLE54D)

INSTALLATION

Installing the Front Door Visors

- Fully open the left front window.
- 2 Install the brackets.



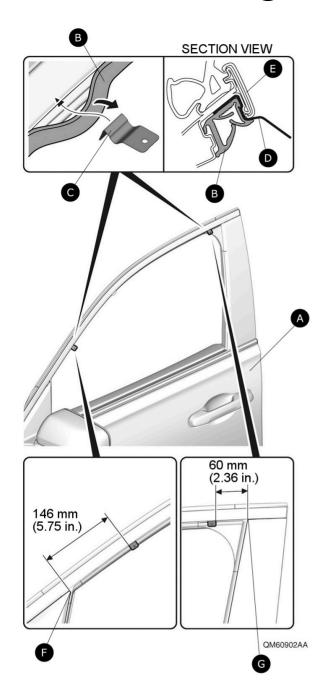


A	LEFT FRONT DOOR
В	GLASS RUN CHANNEL
0	BRACKET(2)
D	BRACKET
B	DOOR SASH
Ē	EDGE OF THE LEFT FRONT DOOR MIRROR BASE
G	EDGE OF THE LEFT FRONT DOOR SASH OUTER TRIM

3 Install the glass run channel.


⇒ NOTE

Make sure to correctly install the glass run channel.




S NOTE


Allow to dry thoroughly.





5 Temporarily attach the adhesive backings.






A	LEFT FRONT DOOR VISOR
Α	ADHESIVE BACKING (Remove.)
В	ADHESIVE BACKING (Attach.)(2)
B	MASKING TAPE

Install the left front door visor.


S NOTE


Be extremely careful when installing the clips; they cannot be reinstalled after installation.

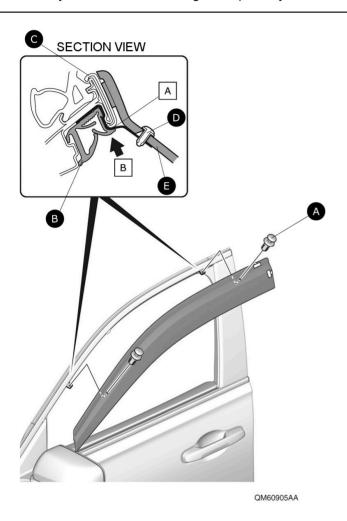

A	CLIP(2)
В	GLASS RUN CHANNEL
0	DOOR SASH
D	CLIP
3	LEFT FRONT DOOR VISOR
Α	BRACKET (There should be no gap between the bracket and the door sash.)
В	Push up.

8 Line up the left front door visor.

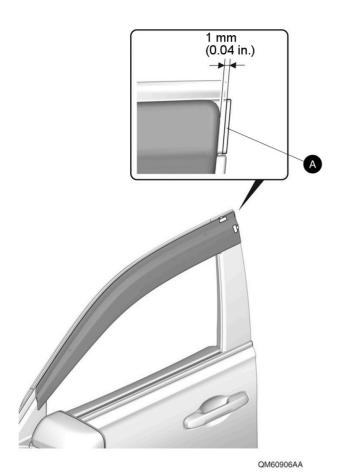




Secure the left front door visor.

■ NOTE

- Make sure that the door visor is installed in the correct position.
- Check the position of double-sided adhesive tapes and make sure to press firmly.

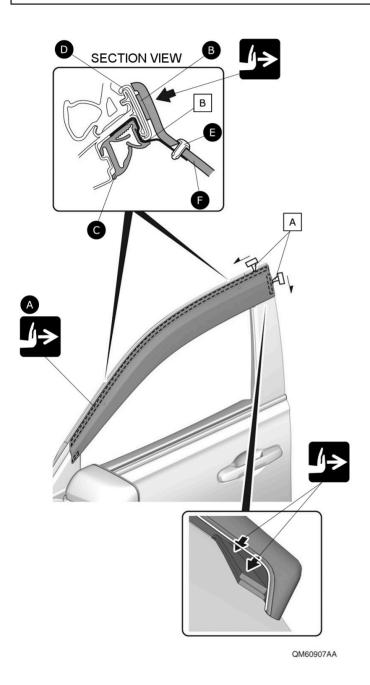

Α	ADHESIVE BACKING (Remove.)(2)
A	DOUBLE-SIDED ADHESIVE TAPE(3)
B	DOUBLE-SIDED ADHESIVE TAPE
0	GLASS RUN CHANNEL
D	DOOR SASH
3	CLIP
(LEFT FRONT DOOR VISOR
В	BRACKET (There should be no gap between the bracket and the door sash.)


1 Secure the left front door visor.



Installing the Rear Door Visors

- Fully open the left rear window.
- 12 Install the brackets.



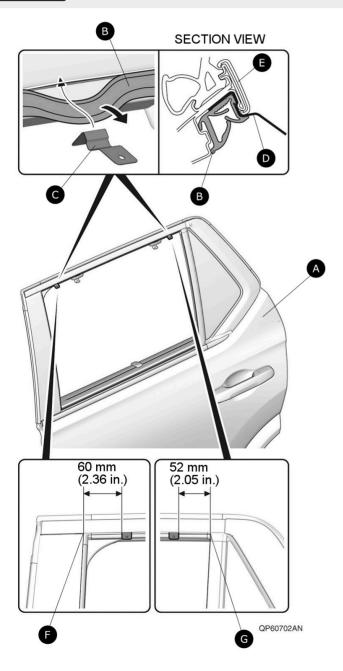

A	LEFT REAR DOOR
B	GLASS RUN CHANNEL
0	BRACKET(2)
D	BRACKET
3	DOOR SASH
Ð	EDGE OF THE LEFT REAR DOOR SASH OUTER TRIM
G	EDGE OF THE LEFT REAR DOOR REAR SASH OUTER TRIM

13 Install the glass run channel.




Make sure to correctly install the glass run channel.

Clean the attaching area.


★ NOTE

Allow to dry thoroughly.





15 Temporarily attach the adhesive backings.




A	LEFT REAR DOOR VISOR
Α	ADHESIVE BACKING (Attach.)(3)
В	MASKING TAPE

16 Install the left rear door visor.




Be extremely careful when installing the clips; they cannot be reinstalled after installation.

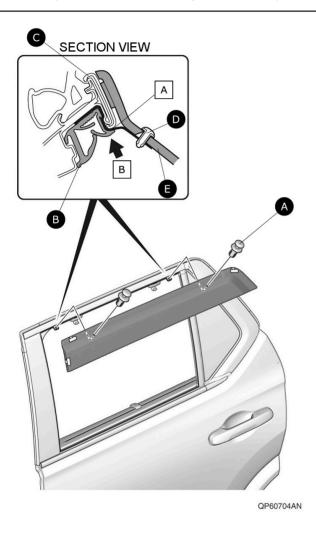

A	CLIP(2)
B	GLASS RUN CHANNEL
0	DOOR SASH
D	CLIP
3	LEFT REAR DOOR VISOR
Α	BRACKET (There should be no gap between the bracket and the door sash.)
В	Push up.

17 Line up the left rear door visor.

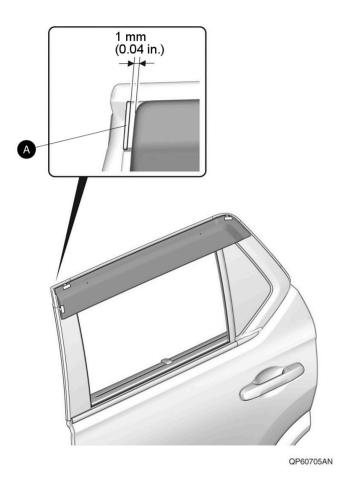




18 Secure the left rear door visor.

S NOTE

- Make sure that the door visor is installed in the correct position.
- Check the position of double-sided adhesive tapes and make sure to press firmly.

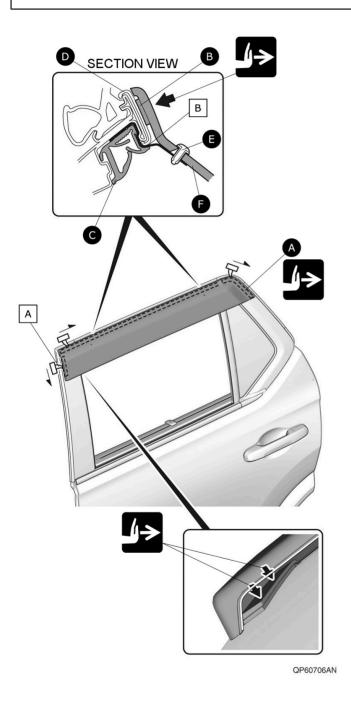


Α	ADHESIVE BACKING (Remove.)(3)
A	DOUBLE-SIDED ADHESIVE TAPE(3)
В	DOUBLE-SIDED ADHESIVE TAPE
0	GLASS RUN CHANNEL
D	DOOR SASH
3	CLIP
B	LEFT REAR DOOR VISOR
В	BRACKET (There should be no gap between the bracket and the door sash.)

19 Secure the left rear door visor.



Repeat steps 1 through 19 on the other side.



21 Check that all parts are installed properly.

Vehicle Check

Resetting the Power Window Control Unit

NOTE

Refer to the service information.

22 Perform the resetting.

Give a copy of this page to your customer.

Door Visor

Use and Care

- To avoid damaging the surface, never use ammonia-based cleaners or solvents to clean the door visor.
- · Clean with a solution of mild dishwashing soap and water using a soft cloth or chamois.