INSTALLATION	Accessory BODY SIDE MOLDINGS P/N 08P05-TG7-100	Application 2021 PILOT	Publications No. VERSION 1 Issue Date JUN 2020
Right front body side molding	4	Alcohol swabs	
eft rear body side molding	TO Ma The Equ Bay nur	OLS AND SUPPLIES REQU sking tape of following tool is available th uipment Program. On the iN, / > Tool and Equipment Prog nber under "Search". Or, cal Rubber Roller (T/N MHLE54	rough the Honda Tool an click on Service > Servic gram, then enter the 1888-424-6857.
Right rear body side molding		stration of the Body Side I	Moldings on the Vehicl
Front template		RIGHT FRONT BODY SIDE MOLDING	DE
/liddle template			LEFT REAR BODY SIDE MOLDING


INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."


NOTE:

- If you are also installing door edge films (sold separately), install them after you install the body side moldings.
- Do not damage the paint finish.
- This kit should be installed only if the ambient air temperature is 15°C (60°F) or above.
- To allow the adhesive to cure, do not wash the vehicle for 24 hours. Please advise the customer.


1. Fold the tab, and line up the front template with the character line, and attach it to the left front door with strips of masking tape as shown.

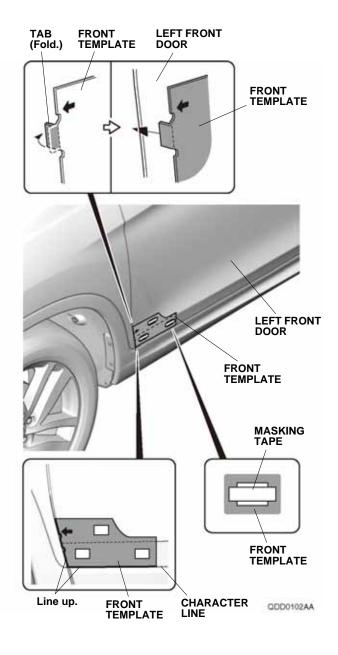


2. Line up the middle template with the character line, and attach it to the left front door and left rear door with strips of masking tape as shown.

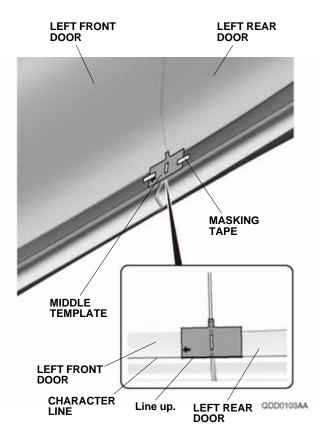

3. Line up the rear template with the character line, and attach it to the left rear door with strips of masking tape as shown.

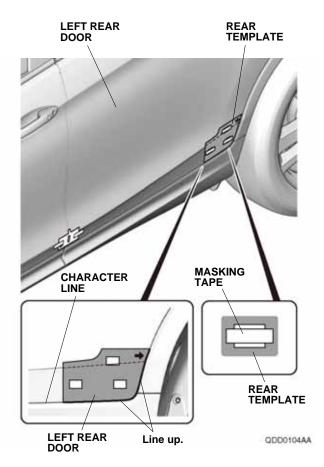


4. Using one alcohol swab, thoroughly clean the left front door where the left front body side molding will attach.




5. Using one alcohol swab, thoroughly clean the left rear door where the left rear body side molding will attach.




6. Peel back the adhesive backings, and tape them to the front surface of the left front body side molding with strips of masking tape. Remove the small piece of adhesive backings.



7. Line up the left front body side molding with the front and middle templates, and attach it to the left front door as shown.

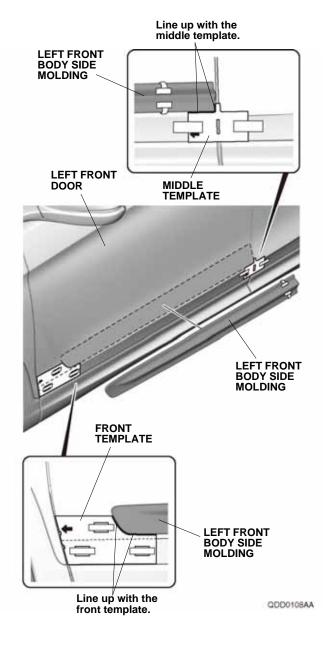


8. While applying light pressure against the left front body side molding, carefully remove the taped adhesive backings.



10. Peel back the adhesive backings, and tape them to the front surface of the left rear body side molding with the strips of masking tape. Remove the small piece of adhesive backings.




9. Using a rubber roller, apply firm pressure against the left front body side molding and roll from one end to the other. Apply firm pressure especially at the ends.




QDD0110AA

- 11. Line up the left rear body side molding with the middle and rear templates, and attach it to the left rear door as shown.
 - Line up with the rear template. LEFT REAR BODY SIDE MOLDING LEFT REAR DOOR REAR TEMPLATE LEFT REAR BODY SIDE MOLDING LEFT REAR BODY SIDE MOLDING Line up with the MIDDLE QDD0112AA TEMPLATE middle template.
- 12. While applying light pressure against the left rear body side molding, carefully remove the taped adhesive backings.



13. Using a rubber roller, apply firm pressure against the left rear body side molding and roll from one end to the other. Apply firm pressure especially at the ends.





QDD0114AA

14. Remove the templates. Turn the templates over and repeat steps 1 through 13 to install the right body side moldings on the right side of the vehicle.