



## INSTALLATION INSTRUCTIONS

Accessory  
**ROOF RAIL COVERS**  
 P/N 08L02-TG7-100B

Application  
**2021 PILOT**

Publications No.  
**VERSION 1**  
 Issue Date  
**JUN 2020**

### PARTS LIST

Left roof rail cover



Right roof rail cover




### TOOLS AND SUPPLIES REQUIRED

Torque wrench  
 T-15 TORX bit

*The following tools are available through the Honda Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.*

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

### Illustration of the Roof Rail Covers on the Vehicle

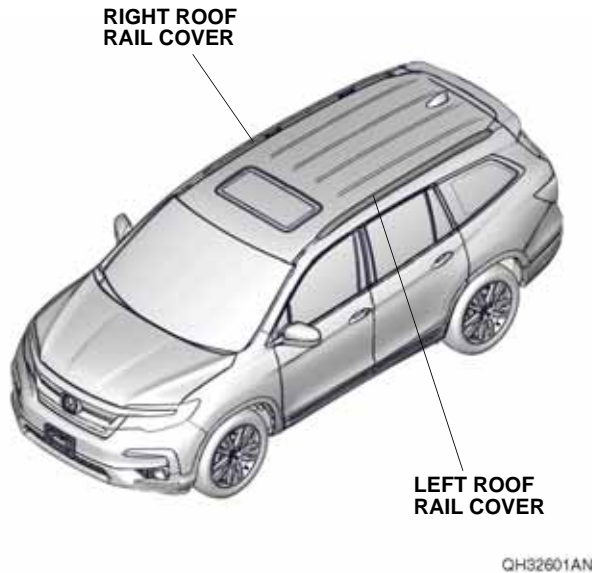


### INSTALLATION


**Customer Information:** The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

**NOTE:** Be extremely careful not to damage the roof and other finished surfaces of the body when installing the roof rail covers.

1. Remove the left roof rail cover as shown.

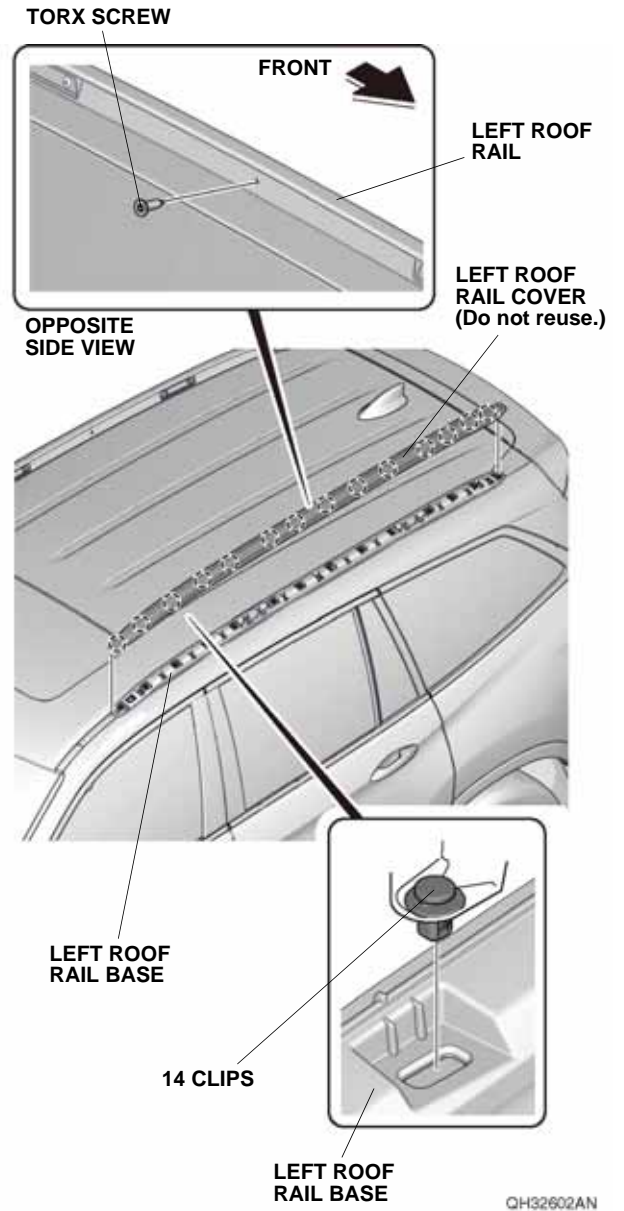

2. Install the new left roof rail cover to the left roof rail base as shown.

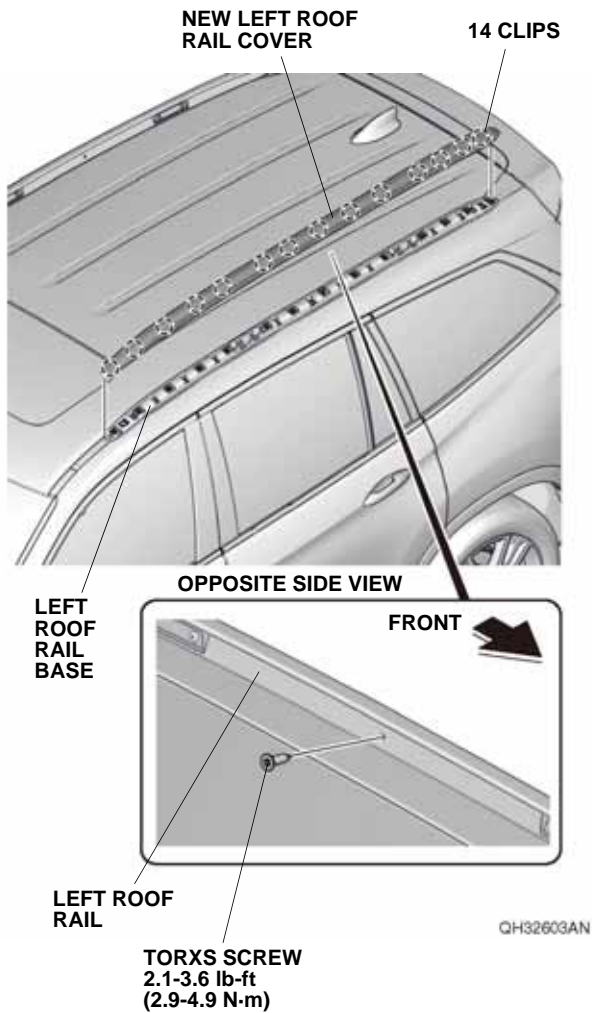

3. Secure the left roof rail cover to the left roof rail base with one TORX screw. Torque the TORX screw to 2.1-3.6 lb-ft (2.9-4.9 N·m).
4. Repeat steps 1 through 3 on the right side of the vehicle.