
### HONDA

### **INSTALLATION INSTRUCTIONS**

NOV. 2025

TRAILER HITCH	2026 PILOT MODEL SERIES	Publications No. VERSION 1
---------------	----------------------------	-------------------------------

### **GENERAL VIEW**

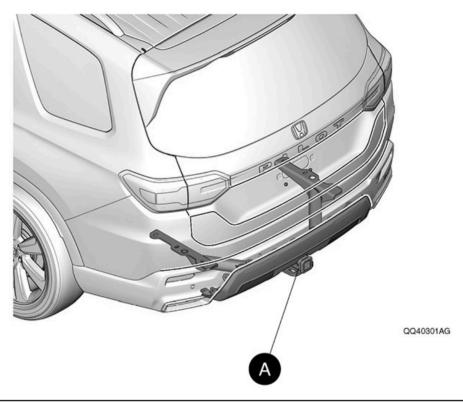

A TRAILER HITCH

### FOR YOUR SAFETY (Read carefully.)

### Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

\*All symbols are not used in all installation instructions.

#### **A** DANGER

You will be killed or seriously hurt if you do not follow the instructions.

#### **▲** WARNING

You can be killed or seriously hurt if you do not follow the instructions.

#### **CAUTION**

You can be hurt if you do not follow the instructions.

#### MOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

#### ■ NOTE

Gives helpful information or instructions to be followed when installing this product.



Indicates a prohibited action.

### **▮** Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

\*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle. (Instrument panel.)

	Wear eye protection.	inhin!	Wear heavy gloves.
<b>ķ</b> ─X	Use an assistant.		Place the part on a blanket.
<b>Y</b> 90°	Work perpendicular.	+	Remove any burrs.
	Use touch-up paint and allow to dry.	lb-ft	Tighten to the specified torque.
5,0	Apply firm pressure while rolling, especially at the ends, to set the adhesive.	4>	Press firmly.
	Clean with isopropyl alcohol.		Return the original part to the customer. (Do not reuse.)

### Wire Harness Routing Precaution

Do not secure the accessory harness to the SRS harness. (except for instruction cases.)	Push the connectors and terminals together until they lock.
Do not pull the harness to unplug the connectors.	Install removed connectors in their original location.
Do not pull the harness.	Secure the accessory harness as shown.
Do not pinch the harness.	Cut off the excess wire tie.

### Safety: General

- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.
- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts. Be extremely careful when handling retaining tabs and clips.
- Note the locations of the parts before removing them so they can be properly installed in their original positions.
- · The illustrations may differ slightly from the actual accessory.

### Safety: Electric Parts

Always disconnect the negative cable from the battery before beginning work.

### Safety: Accessory

- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60 °F (15 °C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle for 24 hours to allow the adhesive to cure.

### **PARTS LIST**

### ■ Trailer Hitch Kit (P/N 08L92-T90-100) (P/N 08L92-T90-P00)

Parts	Parts name	QTY	Remarks
	Trailer hitch	1	
	Cover	1	
	Flange bolt	6	

### **■** Ball Mount Kit (P/N 08L92-T90-100A) (P/N 08L92-T90-P00A)

Parts	Parts name	QTY	Remarks
	Ball mount	1	
	Hitch pin	1	
	Hitch pin clip	1	

### ■ Hitch Cover Panel Kit (P/N 08L92-T90-100D) (P/N 08L92-T90-100E) (P/N 08L92-T90-P00D) (P/N 08L92-T90-P00E)

Parts	Parts name	QTY	Remarks
The state of the s	Hitch cover panel	1	

### ■ Hands-Free Access Unit Kit (P/N 08L91-T90-100A) (P/N 08L91-T90-P00A)

Parts	Parts name	QTY	Remarks
	Hands-Free Access unit	1	
3-9	Label A	1	
	Label B	1	
	Accessory User's Information Manual	1	

### **REQUIRED TOOLS AND SUPPLIES**

- Phillips screwdriver
- 10 mm Open end wrench
- Ratchet
- · Torque wrench
- 10 mm and 21 mm Sockets
- 5 mm Hex wrench
- · Shop towel
- Blanket
- Ruler
- · Masking tape
- · Isopropyl alcohol
- Tape measure
- Stubby Phillips screwdriver

The following tools are available through the Honda Tool and Equipment Program:


- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

### **INSTALLATION**

### Disconnecting the Battery Cable

- Resonator
  - Remove the resonator.



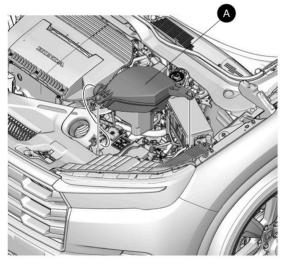



QQ41402AN


### Negative Cable

2

Disconnect the negative cable from the battery.

#### **◆** NOTE

Follow the "12 Volt Battery Terminal Disconnection and Reconnection" described in the service information since the work differs depending on the vehicle.

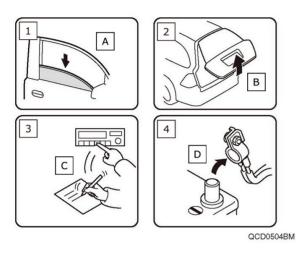


А	Lower.
В	Open.
С	Record.
D	Disconnect.

### ■ Removing the Vehicle Parts


- Left Rear Wheel Arch Protector
  - 3 Open the left rear door.
  - Remove the self-tapping screws.



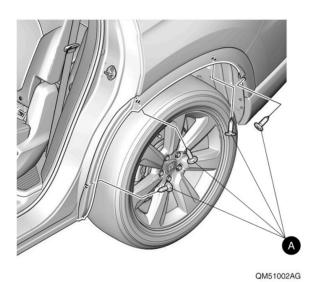

SELF-TAPPING SCREW(4)

**5** Remove the left rear wheel arch protector.

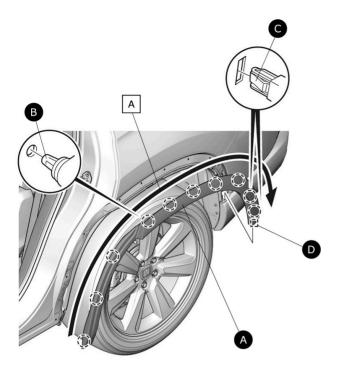


A	LEFT REAR WHEEL ARCH PROTECTOR
В	CLIP(8)
0	CLIP(2)
Α	Remove the clips in order from front to back.
D	RETAINING TAB

QM51003AG

#### Right Rear Wheel Arch Protector

Repeat steps 3 through 5 on the other side.

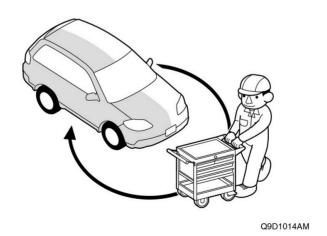


#### Rear Bumper

Attach masking tape to protect the vehicle.

#### MOTICE

To prevent damage, do not remove the masking tape until after the parts are installed.




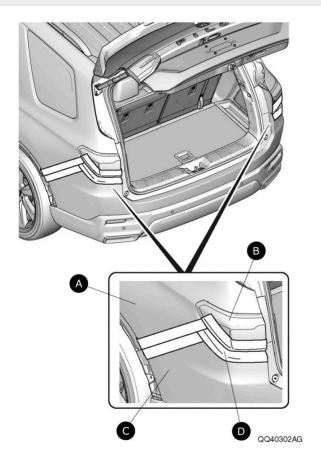

A	REAR FENDER
В	TAILLIGHT
0	REAR BUMPER
Θ	MASKING TAPE

Remove the left bezel.



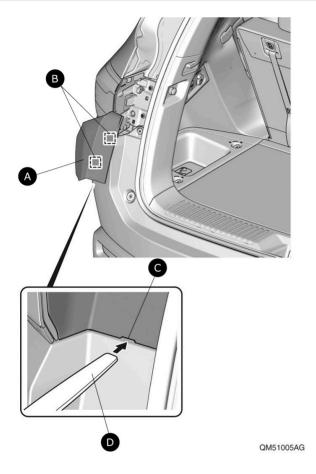


A	LEFT BEZEL
В	RETAINING TAB(2)
0	SLOT
O	PLASTIC TRIM TOOL

Repeat step 8 on the other side.

Remove the clips, hex bolts, and self-tapping screws.



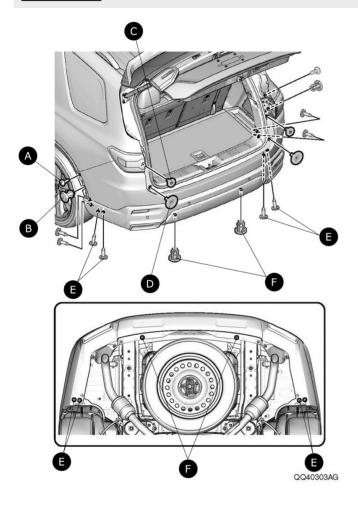

A	SELF-TAPPING SCREW(6)
В	CLIP(2)
0	HEX BOLT (small)(2)
D	HEX BOLT (large)(2)
<b>3</b>	SELF-TAPPING SCREW(2)
B	CLIP(2)


Release the retaining tabs.




- · Release the retaining tabs starting from outside working in.
- Make sure to release the retaining tabs in the correct orientation.






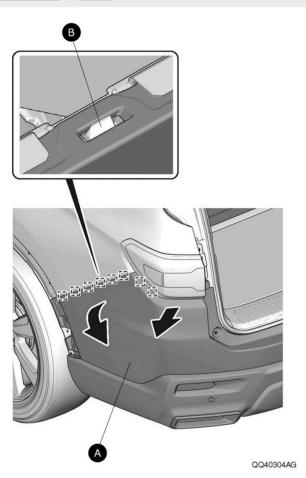




12 Repeat step 11 on the other side.

13 Remove the rear bumper.







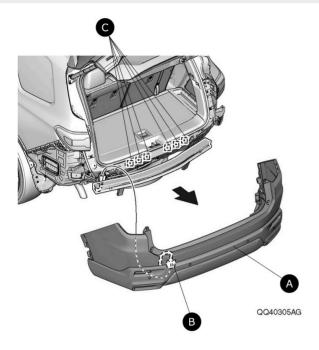


A	REAR BUMPER
В	VEHICLE CONNECTOR
0	RETAINING TAB(6)

### Installing the Hitch Cover Panel

Choose one of these options.

With standard Hands-Free Access unit	
	Go to step 15
Without standard Hands-Free Access unit	
	Go to step 17


15 Unplug the vehicle connector.

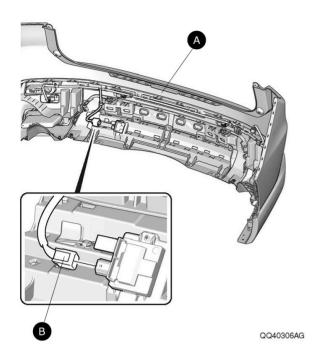

A REAR BUMPER


B VEHICLE CONNECTOR

16 Remove the standard Hands-Free Access unit.

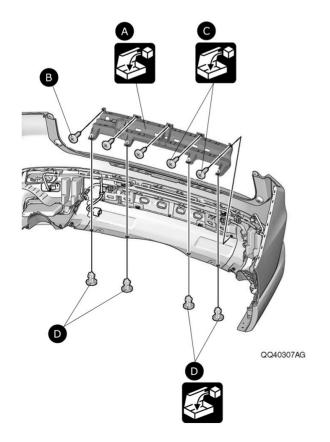


4	STANDARD HANDS-FREE ACCESS UNIT
В	SELF-TAPPING SCREW(3)
0	SELF-TAPPING SCREW(2)
Ð	CLIP(2)

Remove the bolt and clips.

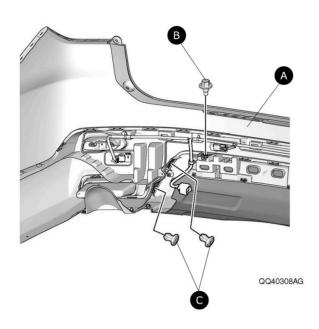


A REAR BUMPER
B BOLT
C CLIP(2)

- Repeat step 17 on the other side.
- 19 Remove the rear bumper lower trim.

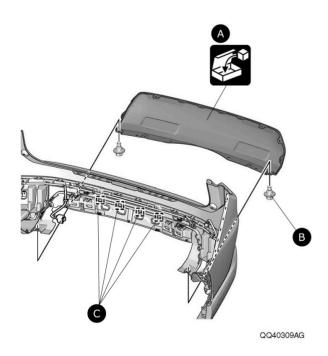


A	REAR BUMPER LOWER TRIM
В	BOLT(2)
0	RETAINING TAB(4)

20 Install the hitch cover panel.

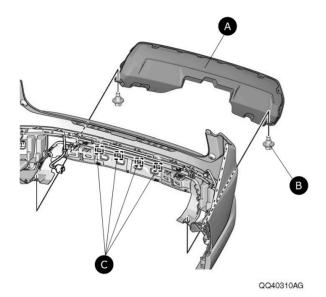

A	HITCH COVER PANEL
B	BOLT(2)
0	RETAINING TAB(4)

2 Secure the hitch cover panel.

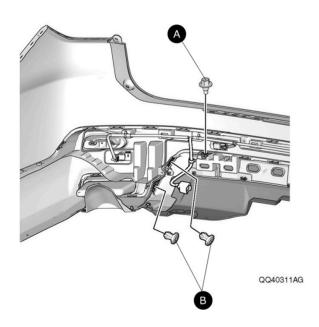

A BOLT
B CLIP(2)


**22** Repeat step 21 on the other side.

### Installing the Trailer Hitch

23 Choose one of these options.


With standard Hands-Free Access unit	
	Go to step 24
Without standard Hands-Free Access unit	
	Go to step 26

24 Install the new Hands-Free Access unit.

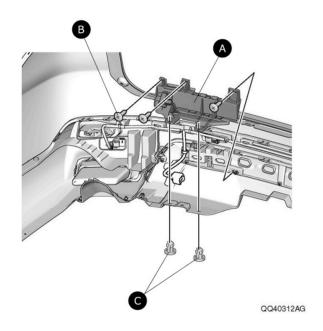

A	NEW HANDS-FREE ACCESS UNIT
В	SELF-TAPPING SCREW(3)
0	CLIP(2)

25 Plug-in the vehicle connector.

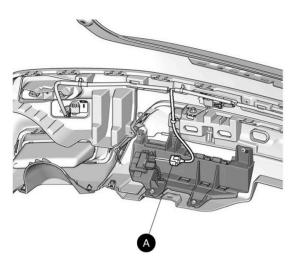


A VEHICLE 3-PIN CONNECTOR

QQ40313AG

- 26 Install the rear bumper.
- 27 Loosely install the trailer hitch.





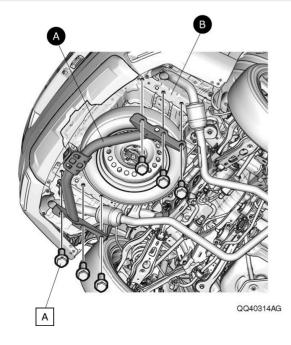


A	TRAILER HITCH
B	VEHICLE PANEL
А	FLANGE BOLT (Loosely secure.)(6)

28 Loosely secure the trailer hitch.



Work in the order shown.

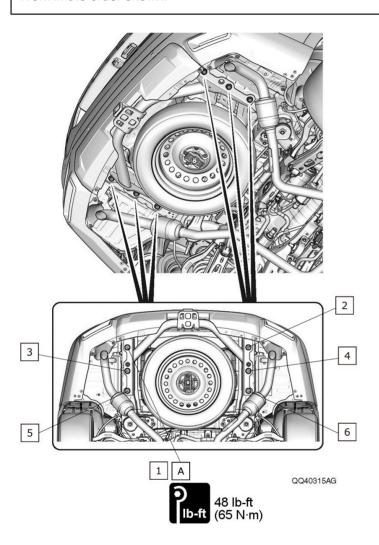


FLANGE BOLT (Loosely secure.)(6)

29 Secure the trailer hitch.



- · Work in the order shown.
- After retightening all the flange bolts, recheck their torque.

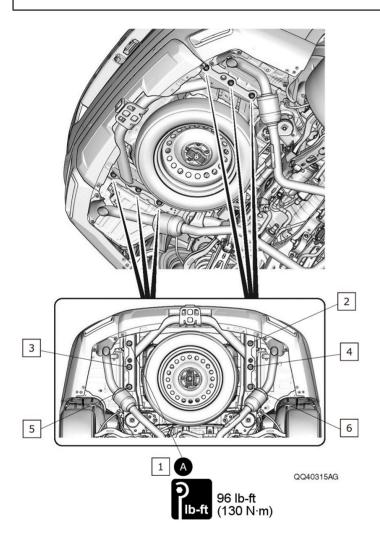

A FLANGE BOLT(6)


30 Choose one of these options.

With standard Hands-Free Access unit
 Go to step 31

 Without standard Hands-Free Access unit
 Go to step 35

Clean the attaching area.



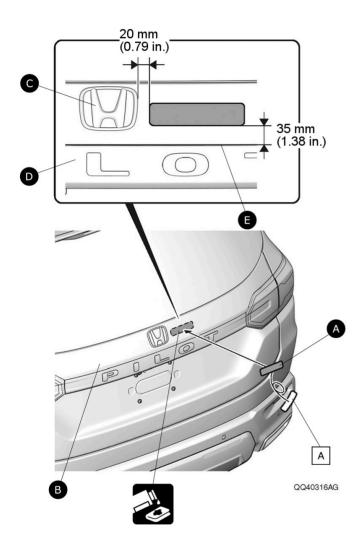


A	LABEL A
Α	ADHESIVE BACKING (Remove.)
В	TAILGATE
0	VEHICLE EMBLEM
D	REAR LICENSE TRIM
<b>3</b>	END OF THE CURVED SURFACE OF THE REAR LICENSE TRIM

32 Attach the label A.

**♦** NOTE

Make sure the customer is aware the label A can be removed after reading.

33 Clean the attaching area.

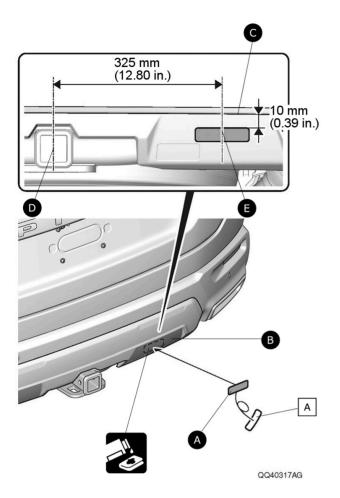

A	LABEL B
Α	ADHESIVE BACKING (Remove.)
В	HITCH COVER PANEL
0	END OF THE CURVED SURFACE
D	CENTER OF THE VEHICLE
<b>3</b>	CENTER OF THE LABEL B

34 Attach the label B.

NOTE

Make sure the customer is aware the label B can be removed after reading.

### **■** Check After Installation

35 Check that all parts are installed and properly routed.

#### **★** NOTE


- · Check that all harnesses are not pulled or pinched.
- Make sure all clips and wire ties are securely installed.

### Installing All Removed Parts

36 Install all removed parts except for the resonator.

### Operation Check

**37** Connect the negative cable to the battery.



A BATTERY

B NEGATIVE CABLE

Q060702BM

Install the resonator.

Make sure the accessory operates as described in the Accessory User's Information Manual (with Hands-Free Access unit).

### Vehicle Check

- Make sure all accessories and systems operate properly.
- If necessary, restore the systems back to normal operation as described in the service information.
- Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.

### Give the following item(s) to your customer:


- Cover
- · Ball mount
- · Hitch pin
- · Hitch pin clip
- Accessory User's Information Manual (With Hands-Free Access unit)

### Give a copy of this page to your customer.

### **TRAILER HITCH**

#### Use and Care


Whenever you remove the hitch pin clip, the hitch pin, and the ball mount, store them securely in the cargo area. Install the cover into the opening at the end of the trailer hitch. When you reinstall the ball mount, store the cover in the cargo area.

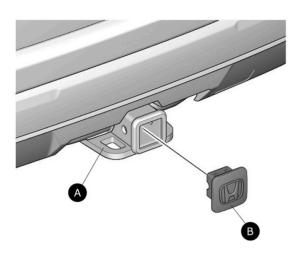


A	TRAILER HITCH
В	COVER

QQ40318AG

Install the ball mount into the trailer hitch using a hitch pin clip and hitch pin.

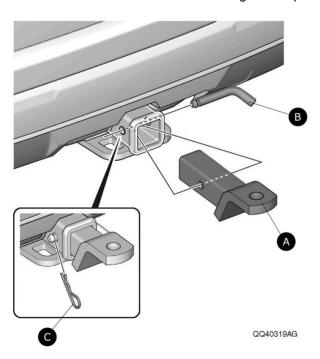

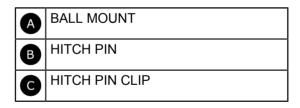

After the first 600 miles (1,000 km) of towing, have your Honda Dealer re-check the tightness of the trailer hitch bolts.