
HONDA

INSTALLATION INSTRUCTIONS

NOV. 2025

GENERAL VIEW

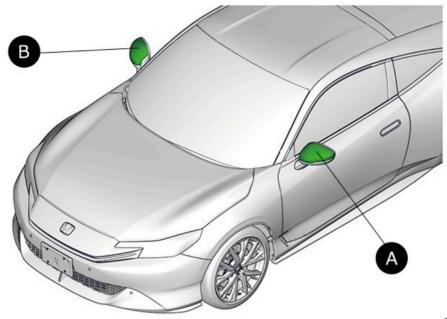

QP02303AD

A	LEFT COVER

B RIGHT COVER

FOR YOUR SAFETY (Read carefully.)

Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

*All symbols are not used in all installation instructions.

DANGER

You will be killed or seriously hurt if you do not follow the instructions.

▲ WARNING

You can be killed or seriously hurt if you do not follow the instructions.

CAUTION

You can be hurt if you do not follow the instructions.

MOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

★ NOTE

Gives helpful information or instructions to be followed when installing this product.




Indicates a prohibited action.

Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle. (Instrument panel.)

			•
	Wear eye protection.	Main	Wear heavy gloves.
ķ ─¾	Work by two or more people.		Place the part on a blanket.
	Mark with felt-tip pen.	<u>‡</u>	Mark with pushpin. (Pierce through.)
Ţ	Mark with center punch.	+	Remove any burrs.
ŢĒ	Use touch-up paint and allow to dry.	Z	Wrap the masking tape around the flat-tip screwdriver.
	Return the original part to the customer. (Do not reuse.)	, Si	Apply firm pressure while rolling, especially at the ends, to set the adhesive.
4>	Press firmly.	lb-ft	Tighten to the specified torque.
4 90°	Work perpendicularly.		Clean with isopropyl alcohol.

These icons indicate the name of part or location (also contain other instructions).

A B G	Name of part or location, etc.
A B C	Action or work instruction
123	Order of work
00 0	Position of clip
	Position of retaining tab
(x 2) (x 3) (x 4)	Quantity

Wire Harness Routing Precaution

Do not secure the accessory harness to the SRS harness. (except for instruction cases.)	Push the connectors and terminals together until they lock.
Do not pull the harness to unplug the connectors.	Install removed connectors in their original location.
Do not pull the harness.	Secure the accessory harness as shown.
Do not pinch the harness.	Cut off the excess wire tie.

Safety: General

A CAUTION

Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.

MOTICE

- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts. Be extremely careful when handling retaining tabs and clips.
- Note the locations of the parts before removing them so they can be properly installed in their original positions.

★ NOTE

The illustrations may differ slightly from the actual accessory.

Safety: Electric Parts

MOTICE

Always disconnect the negative cable from the battery before beginning work.

PARTS LIST

Door Mirror Covers Kit (P/N 08R06-36W-100)

Parts	Parts name	QTY	Remarks
	Left cover	1	
	Right cover	1	

REQUIRED TOOLS AND SUPPLIES

- Flat-tip screwdriver
- Masking tape
- 10 mm Open end wrench
- Grease
- · Shop towel

The following tools are available through the Honda Tool and Equipment Program:

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)


INSTALLATION


Removing the Vehicle Parts

- Disconnecting the Battery Cable
 - Disconnect the negative cable from the battery.

◆ NOTE

Follow the "12 Volt Battery Terminal Disconnection and Reconnection" described in the service information since the work differs depending on the vehicle.







A Lower.

В

Record.

Disconnect.


Left Mirror Housing Cover


2 Attach masking tape to protect the vehicle.



To prevent damage, do not remove the masking tape until after the parts are installed.



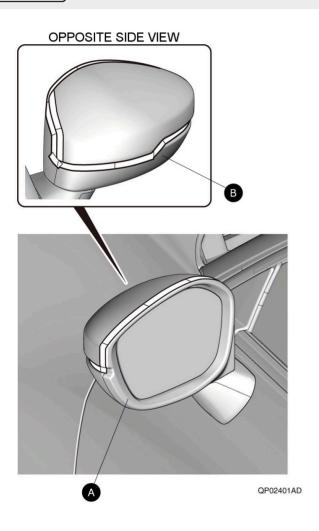





Release the left mirror holder.




Be careful not to forcedly remove the mirror holder fixed with clip. The mirror holder or actuator will be damaged.

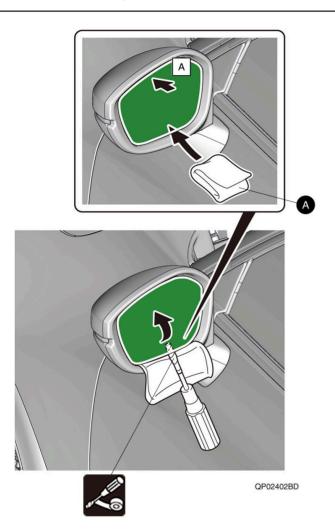




4

Attach masking tape to prevent incorrect vehicle connector.

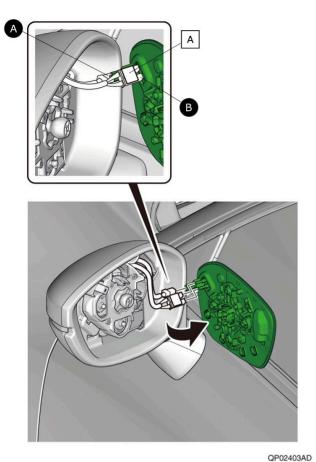


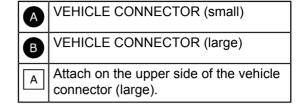

5 Remove the left mirror holder.

◆ NOTE


Make sure that the left mirror holder is not broken or deformed.





Be careful not to damage the retaining tabs.



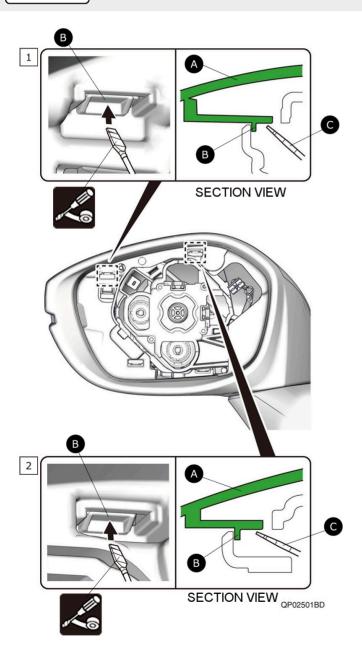

A	LEFT MIRROR HOUSING COVER
В	RETAINING TAB
0	FLAT-TIP SCREWDRIVER
[]	RETAINING TAB


Remove the left mirror housing cover.

♦ NOTE

- Be careful not to damage the tabs.
- · Make sure that the tab is not broken or deformed.
- · Make sure that there is no damaged tab left in the vehicle.





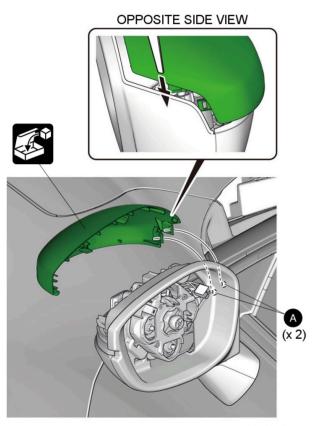

QP02502AD

Right Mirror Housing Cover

Repeat steps 2 through 7 on the other side.



Installing the Covers




Install the left cover.

S NOTE

- Make sure that there is no gap between the cover and the mirror.
- · Make sure to secure the retaining tabs properly.



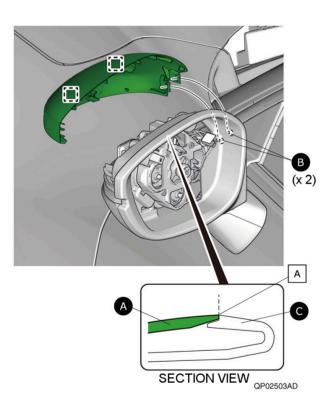


A	LEFT COVER
B	TAB
0	LEFT MIRROR
Α	Check for no gap.
	RETAINING TAB

10 Push the actuator rods.

S NOTE

- · Make sure the actuator rod is in the correct orientation.
- Apply the grease as described in the service information.

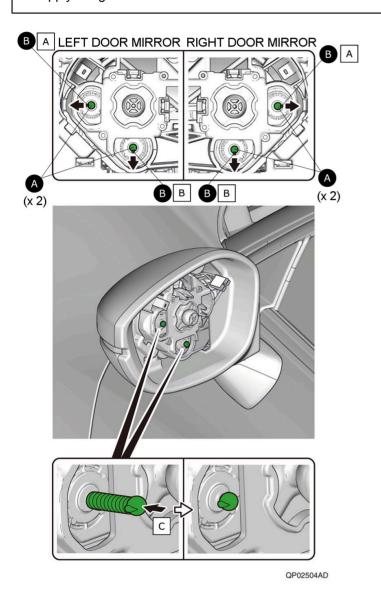


A	ACTUATOR ROD
В	PROJECTION
Α	Face outward.
В	Face downward.
С	Push.

Plug-in the vehicle connectors.



Make sure to install the vehicle connector (large) in the correct orientation.

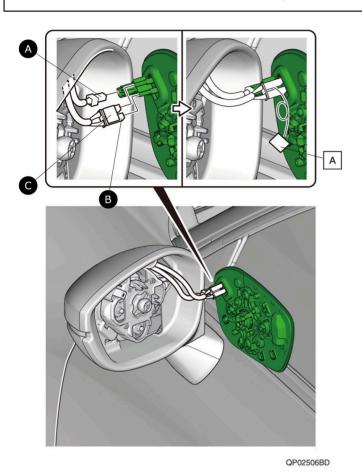

A VEHICLE CONNECTOR (small)

B VEHICLE CONNECTOR (large)

C MASKING TAPE


A Remove.

Remove the masking tape.

13 Install the left mirror holder.

★ NOTE

- · Make sure to check the actuator rods are installed properly.
- To prevent damage, be sure to heat the entire installing surface of mirror to approximately the same as body temperature (86°F 104°F (30°C 40°C)) before installing.
- · Do not heat the mirror locally as it may deform.

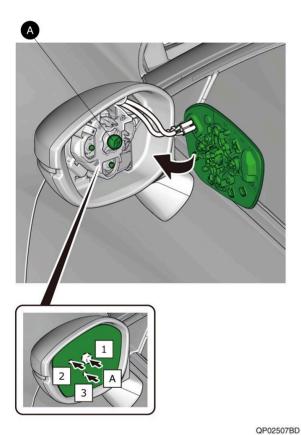


A	PIVOT
Α	Push.

QP02507BL

Check the left mirror holder.

S NOTE

Move the mirror holder in all directions to check if it is installed securely.

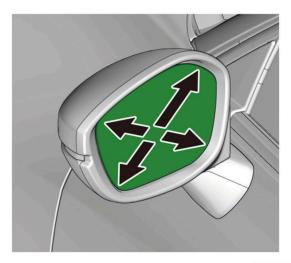

QP02508AD

Repeat steps 9 through 14 on the other side.



■ Check After Installation


16 Check that all parts are installed and properly routed.




- · Check that all harnesses are not pulled or pinched.
- · Make sure all clips and wire ties are securely installed.

Vehicle Check

Connect the negative cable to the battery.





Q060702BM

- 1 S Check that the turn signal and angle adjustment of the mirror operate properly.
- Make sure all accessories and systems operate properly.
- 20 Make sure that the reverse tilt mirror can work properly. (Vehicle equipped with reverse tilt mirror)
- If necessary, restore the systems back to normal operation as described in the service information.
- Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.