




DOOR VISORS	2026 Prelude MODEL SERIES	Publications No. VERSION 1
-------------	------------------------------	-------------------------------

GENERAL VIEW

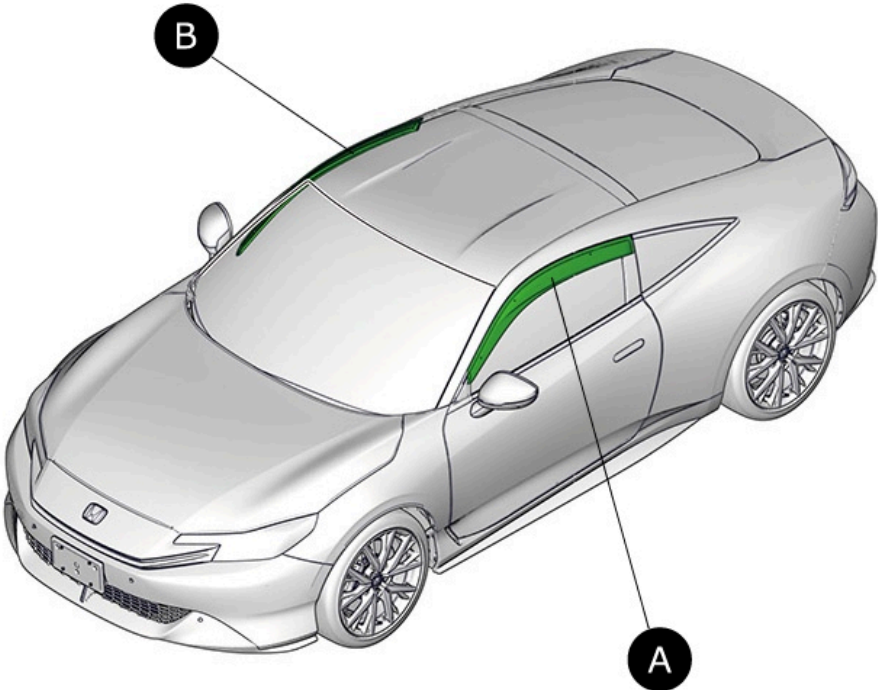

QPN1101AD

A	LEFT DOOR VISOR
B	RIGHT DOOR VISOR

## FOR YOUR SAFETY (Read carefully.)

### Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

\*All symbols are not used in all installation instructions.

#### DANGER

You will be killed or seriously hurt if you do not follow the instructions.

#### WARNING

You can be killed or seriously hurt if you do not follow the instructions.

#### CAUTION

You can be hurt if you do not follow the instructions.

#### NOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

#### NOTE

Gives helpful information or instructions to be followed when installing this product.





















Indicates a prohibited action.
















## Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

\*All icons are not used in all installation instructions.

	The location on the vehicle.		The location in the vehicle. (Instrument panel.)
	Wear eye protection.		Wear heavy gloves.
	Work by two or more people.		Place the part on a blanket.
	Mark with felt-tip pen.		Mark with pushpin. (Pierce through.)
	Mark with center punch.		Remove any burrs.
	Use touch-up paint and allow to dry.		Wrap the masking tape around the flat-tip screwdriver.
	Return the original part to the customer. (Do not reuse.)		Apply firm pressure while rolling, especially at the ends, to set the adhesive.
	Press firmly.		Tighten to the specified torque.
	Work perpendicularly.		Clean with isopropyl alcohol.

These icons indicate the name of part or location (also contain other instructions).

   ...	Name of part or location, etc.
   ...	Action or work instruction
   ...	Order of work
   ...	Position of clip
   ...	Position of retaining tab
(x 2) (x 3) (x 4) ...	Quantity

## **Safety: General**

### **CAUTION**

Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and safety of others.

### **NOTICE**

- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts.

### **NOTE**

- Visors may not be legal in all states. Please check the laws of your state.
- The illustrations may differ slightly from the actual accessory.







## **Safety: Accessory**

### **NOTICE**

- Do not shock or impact the accessories.
- Be careful that this accessory is easy to be invaded by the solvent or contact cleaner.
- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60 °F (15 °C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle for 24 hours to allow the adhesive to cure.

## PARTS LIST

### ■ Door Visors Kit (P/N 08R04-36W-100)

Parts	Parts name	QTY	Remarks
	Left door visor	1	
	Right door visor	1	
	Bracket A	4	
	Bracket B	2	
	Clip	6	
	Alcohol wipe	2	

## REQUIRED TOOLS AND SUPPLIES

- Masking tape
- Ruler
- Tape measure

The following tool is available through the Honda Tool and Equipment Program:  
Rubber Roller (T/N MHLE54D)

## INSTALLATION

### ■ Installing the Door Visors


1

Fully open the left window.

## 2 Install the bracket B.

### NOTE

Check the shape and the installation position of the bracket.



A	BRACKET B
B	DOOR SASH
C	GLASS RUN CHANNEL
D	EDGE OF THE LEFT DOOR CORNER TRIM

QPN0402AD



## 3 Install the glass run channel.




### NOTE

Make sure to correctly install the glass run channel.

## 4 Install the brackets A.

### NOTE

Check the shape and the installation position of the brackets.

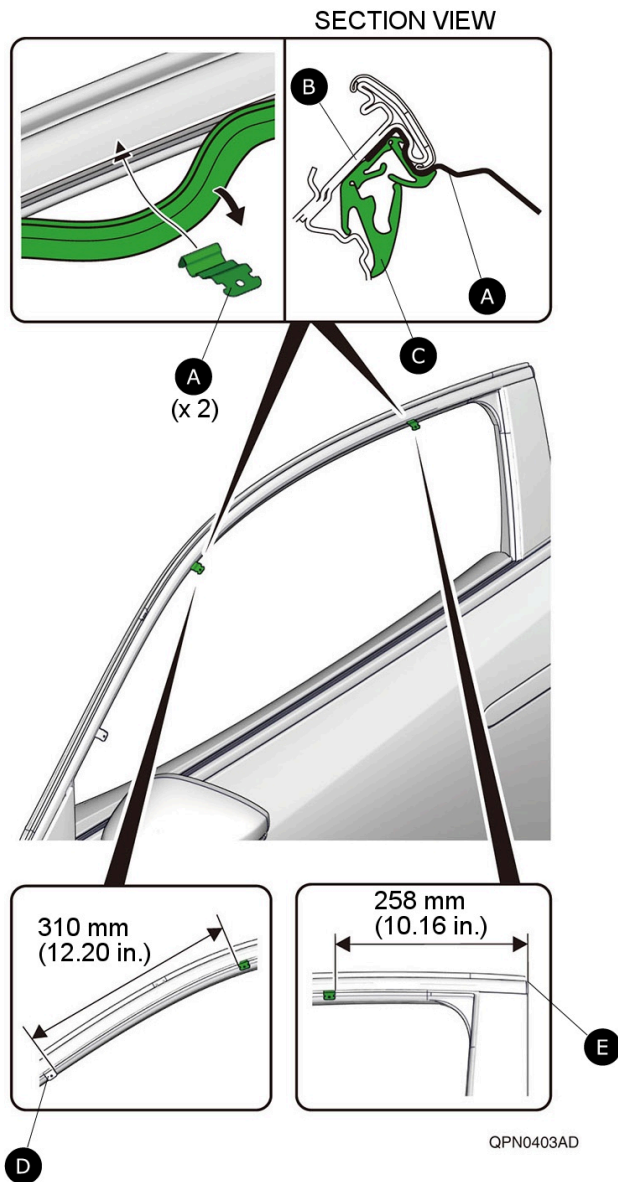

A	BRACKET A
B	DOOR SASH
C	GLASS RUN CHANNEL
D	BRACKET B
E	EDGE OF THE END CAP

## 5 Install the glass run channel.

### NOTE

Make sure to correctly install the glass run channel.


## 6 Clean the attaching area.

### NOTE

Allow to dry thoroughly.


**A**

ALCOHOL WIPE

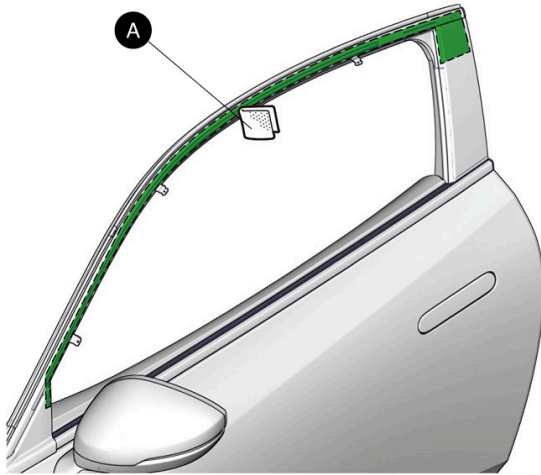

QPN1102AD

## 7 Temporarily attach the adhesive backings.

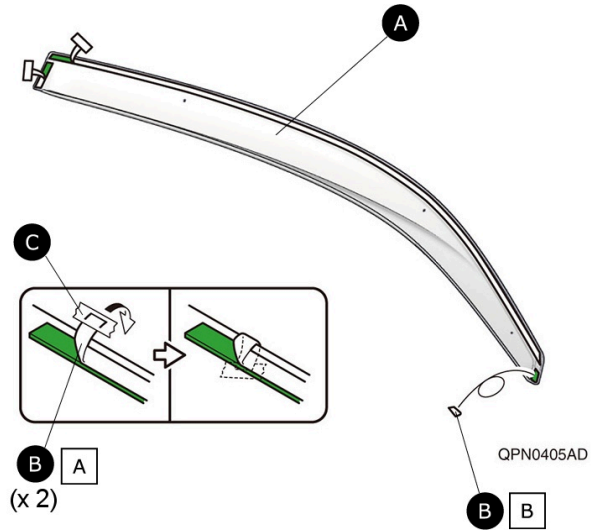


<b>A</b>	LEFT DOOR VISOR
<b>B</b>	ADHESIVE BACKING
<b>C</b>	MASKING TAPE
<b>A</b>	Attach.
<b>B</b>	Remove.

## 8 Remove the adhesive backing.

## 9 Install the left door visor.


### NOTE

- Be extremely careful when installing the clips. Clips can not be removed and reinstalled after installation.
- Do not press the double-sided adhesive tapes in this step, as it will be fixed in the post-process.

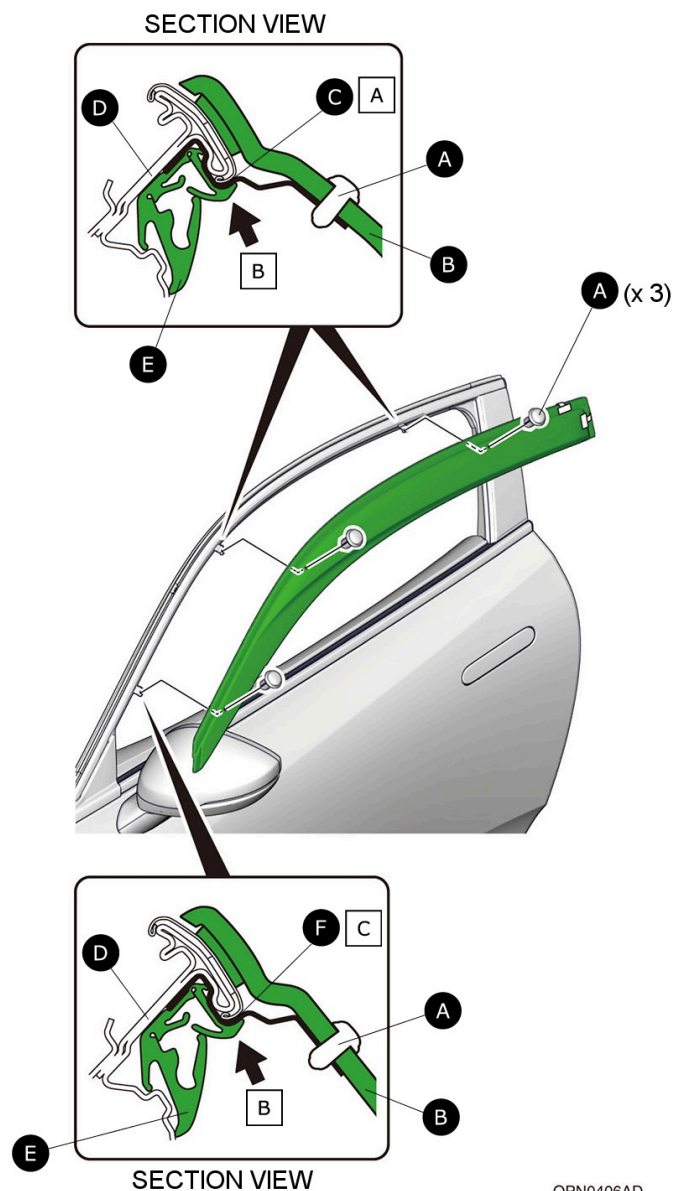

A	CLIP
B	LEFT DOOR VISOR
C	BRACKET A
D	DOOR SASH
E	GLASS RUN CHANNEL
F	BRACKET B
A	There should be no gap between the bracket A and the door sash.
B	Push up.
C	There should be no gap between the bracket B and the door sash.

## 10 Line up the left door visor.

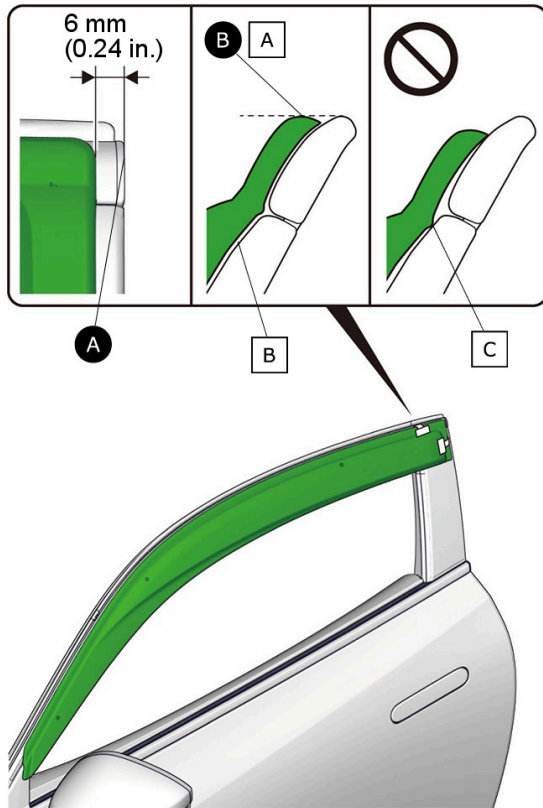

<b>A</b>	EDGE OF THE END CAP
<b>B</b>	TOP EDGE OF THE LEFT DOOR VISOR
<b>A</b>	Line up with the top edge of the left door outer molding.
<b>B</b>	Equal the gap between the left door center pillar trim and the left door visor.
<b>C</b>	Do not ride on the left door center pillar trim.


QPN0501BD

# 11

Secure the left door visor.

## NOTE

- Make sure that the door visor is installed in the correct position.
- Check the position of double-sided adhesive tapes and make sure to press firmly.

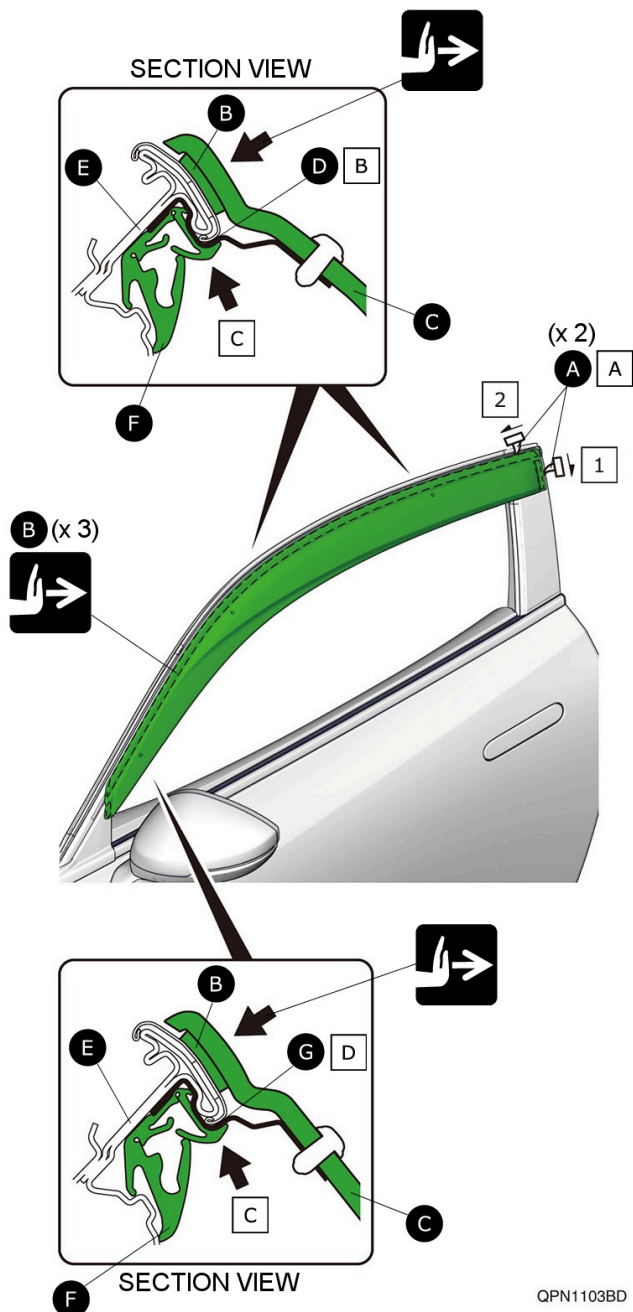


A	ADHESIVE BACKING
B	DOUBLE-SIDED ADHESIVE TAPE
C	LEFT DOOR VISOR
D	BRACKET A
E	DOOR SASH
F	GLASS RUN CHANNEL
G	BRACKET B
A	Remove.
B	There should be no gap between the bracket A and the door sash.
C	Push up.
D	There should be no gap between the bracket B and the door sash.

QPN1103BD

# 12

Secure the left door visor.

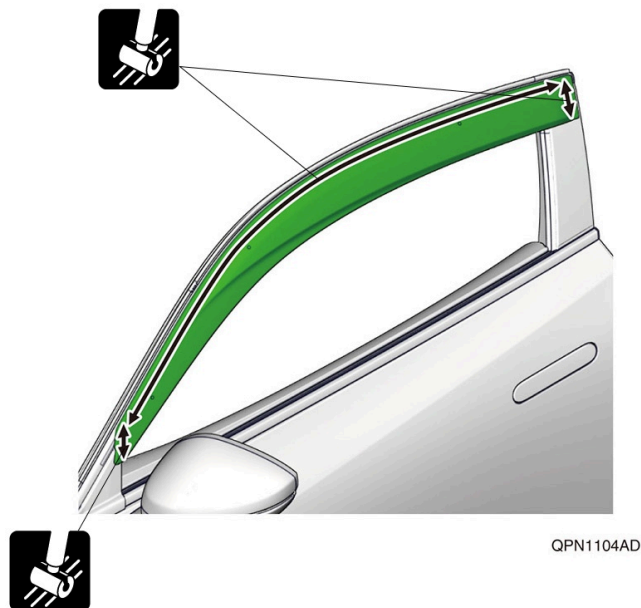

# 13

Repeat steps 1 through 12 on the other side.



# 14

Check that all parts are installed properly.



## Vehicle Check

### ● Resetting the Power Window Control Unit

#### NOTE

Refer to the service information.

**15** Perform the resetting.

**Give a copy of this page to your customer.**

## **■ Door Visor**

### **● Use and Care**

- To avoid damaging the surface, never use ammonia-based cleaners or solvents to clean the door visor.
- Clean with a solution of mild dishwashing soap and water using a soft cloth or chamois.