
HONDA

INSTALLATION INSTRUCTIONS

NOV. 2025

GENERAL VIEW

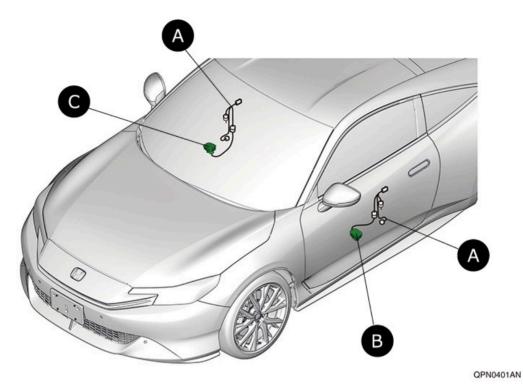

	A	HARNESS
Γ		LEET LICHT

B	LEFT LIGHT
0	RIGHT LIGHT

FOR YOUR SAFETY (Read carefully.)

Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

*All symbols are not used in all installation instructions.

A DANGER

You will be killed or seriously hurt if you do not follow the instructions.

▲ WARNING

You can be killed or seriously hurt if you do not follow the instructions.

CAUTION

You can be hurt if you do not follow the instructions.

MOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

■ NOTE

Gives helpful information or instructions to be followed when installing this product.




Indicates a prohibited action.

Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.



The location on the vehicle.



The location in the vehicle. (Instrument panel.)

	·		
	Wear eye protection.	Man	Wear heavy gloves.
ķ —≯	Work by two or more people.		Place the part on a blanket.
. All	Mark with felt-tip pen.	1	Mark with pushpin. (Pierce through.)
Ţ	Mark with center punch.	+	Remove any burrs.
ŢĒ	Use touch-up paint and allow to dry.	Z	Wrap the masking tape around the flat-tip screwdriver.
	Return the original part to the customer. (Do not reuse.)	77.0	Apply firm pressure while rolling, especially at the ends, to set the adhesive.
4>	Press firmly.) lb-ft	Tighten to the specified torque.
4 90°	Work perpendicularly.		Clean with isopropyl alcohol.

These icons indicate the name of part or location (also contain other instructions).

A B G	Name of part or location, etc.
A B C	Action or work instruction
123	Order of work
00 0	Position of clip
	Position of retaining tab
(x 2) (x 3) (x 4)	Quantity

Wire Harness Routing Precaution

Do not secure the accessory harness to the SRS harness. (except for instruction cases.)	Push the connectors and terminals together until they lock.
Do not pull the harness to unplug the connectors.	Install removed connectors in their original location.
Do not pull the harness.	Secure the accessory harness as shown.
Do not pinch the harness.	Cut off the excess wire tie.

Safety: General

CAUTION

Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.

MOTICE

- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts. Be extremely careful when handling retaining tabs and clips.
- Note the locations of the parts before removing them so they can be properly installed in their original positions.

★ NOTE

The illustrations may differ slightly from the actual accessory.

■ Safety: Electric Parts

MOTICE

Always disconnect the negative cable from the battery before beginning work.

Safety: Accessory

MOTICE

- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60 °F (15 °C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.

PARTS LIST

■ Pattern Projectors Kit (P/N 08V27-36W-100)

Parts	Parts name	QTY	Remarks
	Left light (identification mark: L)	1	
	Right light (identification mark: R)	1	
	Harness	2	
	Wire tie	8	
	Self-tapping screw	2	
	Fuse label	1	
	Aluminum tape	1	

REQUIRED TOOLS AND SUPPLIES

- · Phillips screwdriver
- 10 mm Open end wrench
- · Diagonal cutters
- Isopropyl alcohol
- Shop towel
- Pushpin
- Drill
- 3 mm, 6 mm, 8 mm, and 11 mm Drill bits
- File
- Scissors
- · Masking tape
- Eye protection (face shield, safety goggles, etc.)

The following tools are available through the Honda Tool and Equipment Program:

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)


INSTALLATION


Removing the Vehicle Parts


- Disconnecting the Battery Cable
 - Disconnect the negative cable from the battery.

◆ NOTE

Follow the "12 Volt Battery Terminal Disconnection and Reconnection" described in the service information since the work differs depending on the vehicle.







А	Lower.
В	Record.
	Disconnect.

Left Door Panel

Attach masking tape to protect the vehicle.

◆ NOTE

To prevent damage, do not remove the masking tape until after the parts are installed.





QPN0402AN

Remove the left door switch panel.




1	1
//	
/	
	Α

QPN0403AN

A	VEHICLE CONNECTORS
0	CLIP
	RETAINING TAB

Remove the cover.

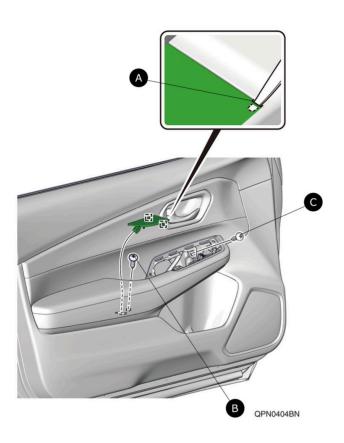

A	SLOT
В	SELF-TAPPING SCREW (long)
0	SELF-TAPPING SCREW (short)
	RETAINING TAB


5 Remove the self-tapping screws.

Release the left door panel.



CLIP	
------	--

Remove the left door panel.

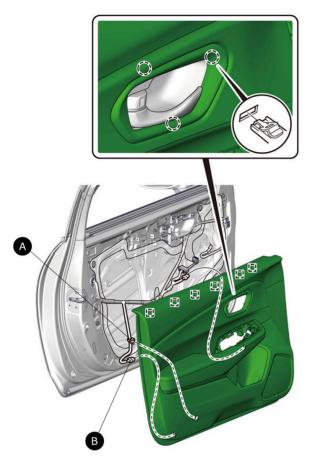

A	VEHICLE CLIP
В	VEHICLE CONNECTORS
\bigcirc	CLIP
	RETAINING TAB

QPN0406AN

Right Door Panel

Repeat steps 2 through 7 on the other side.



Q9D1014AM


Installing the Lights

9

Pierce the left door panel.

★ NOTE

Make sure to pierce the correct position to ensure the light projection angle is correct.

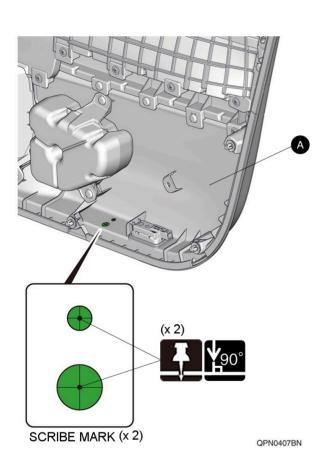




10 Drill the left door panel.



Make sure to drill the correct position to ensure the light projection angle is correct.



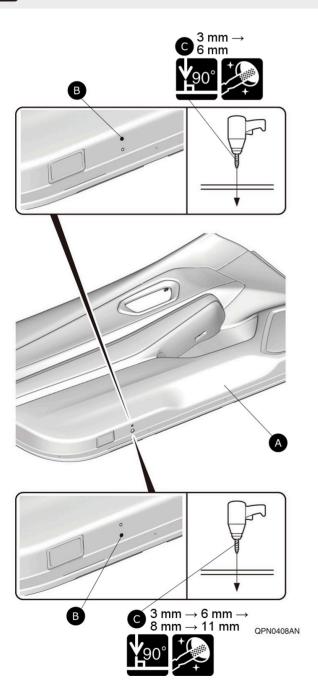


A	LEFT DOOR PANEL (outside)
В	MARK
0	DRILL BITS

Install the left light.


S NOTE

Check the identification mark and the installation position of the light to ensure the light projection angle is correct.

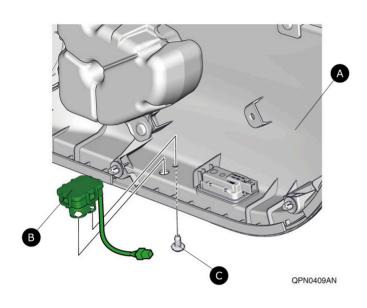

A	LEFT DOOR PANEL (inside)
В	LEFT LIGHT (identification mark: L)
0	SELF-TAPPING SCREW

12 Secure the left light cord.

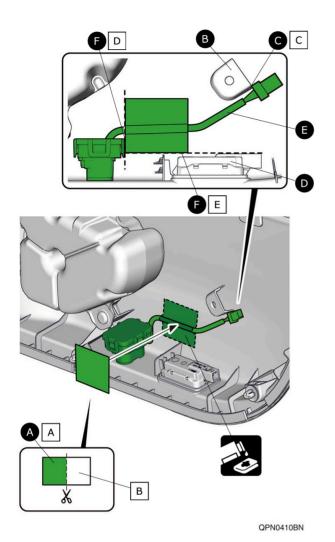

A	ALUMINUM TAPE
В	CLIP BASE
0	EDGE OF THE LEFT LIGHT 4-PIN CONNECTOR
D	COURTESY LIGHT
•	LEFT LIGHT CORD
•	EDGE OF THE ALUMINUM TAPE
А	Cut in half.
В	Used in the other side.
С	Line up with the clip base.
D	Line up with the left light.
Е	Line up with the courtesy light.


Repeat steps 9 through 12 on the other side.



Q9D1014AM

Routing the Harness


14 Attach the fuse labels.



A	HARNESS
B	FUSE LABEL (2A OPTION)
0	FUSE CASE

15 Secure the harness and fuse case.




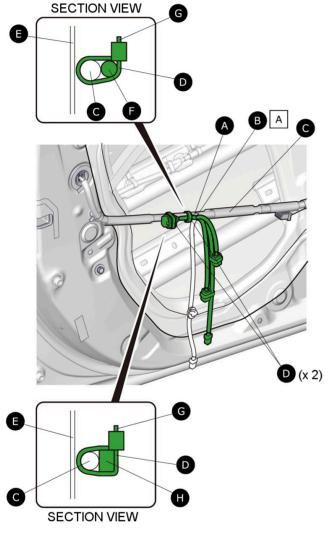

A	TION
B	HARNESS BRANCH SECTION
0	VEHICLE HARNESS
O	WIRE TIE
3	HOLE SEAL
(3)	HARNESS
G	CUT END
•	FUSE CASE
А	Line up with the vehicle harness branch section.

QPN0412BN


16 Plug-in the vehicle connector.

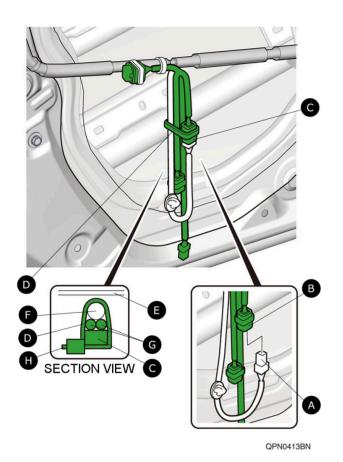

A	VEHICLE 2-PIN CONNECTOR
В	HARNESS 2-PIN CONNECTOR
0	2-PIN CONNECTORS
D	WIRE TIE
3	HOLE SEAL
(3)	VEHICLE HARNESS
G	HARNESS
•	CUT END


Secure the harness and connectors.

18 Secure the vehicle harness.

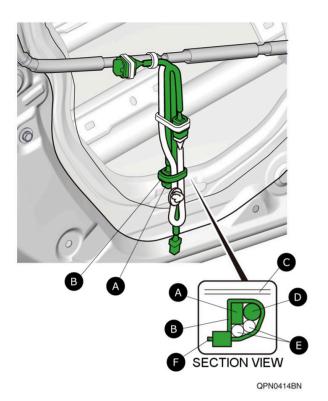

A	HARNESS 4-PIN CONNECTOR
В	WIRE TIE
0	HOLE SEAL
O	HARNESS
3	VEHICLE HARNESS
3	CUT END

1 9 Plug-in the harness connector and left light connector.

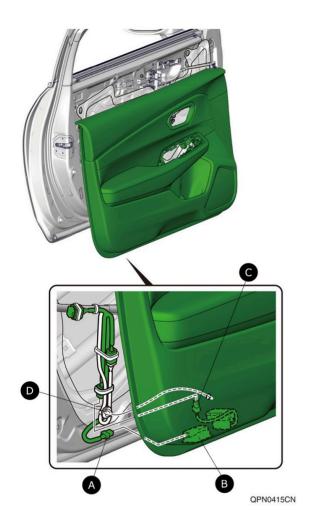

A	HARNESS 2-PIN CONNECTOR
Œ	COURTESY LIGHT
0	LEFT LIGHT 4-PIN CONNECTOR
0	VEHICLE CLIP

20 Install the left door panel.

Repeat steps 15 through 20 on the other side.



405101

■ Check After Installation

22 Check that all parts are installed and properly routed.




- Check that all harnesses are not pulled or pinched.
- Make sure all clips and wire ties are securely installed.


Installing All Removed Parts

23 Install all removed parts.

Operation Check

24 Connect the negative cable to the battery.

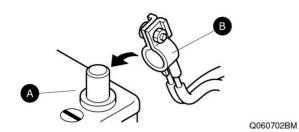





- 25 Check that the light comes on by opening a door.
- 26 Check that the light comes off by closing a door.

27 Check the lighting condition.

MOTICE

- If the logo mark illuminated on the ground is tilted against the vehicle, loosen the self-tapping screw secured in step 11 and adjust it so that the logo mark is not tilted.
- The illustration shows information on the left side of the vehicle. Repeat the same procedure for the right side of the vehicle.

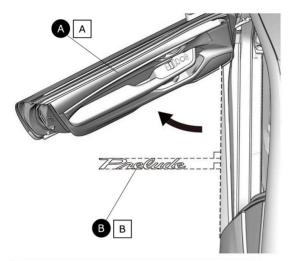

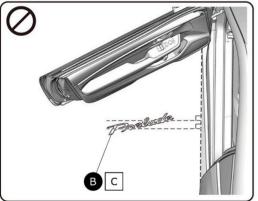

A	LEFT DOOR
B	LOGO MARK
Α	Open for two notches.
В	Check that it is not tilted against the vehicle.
С	It is tilted against the vehicle.

QQ31401AN

Vehicle Check

- 28 Make sure all accessories and systems operate properly.
- If necessary, restore the systems back to normal operation as described in the service information.
- Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.