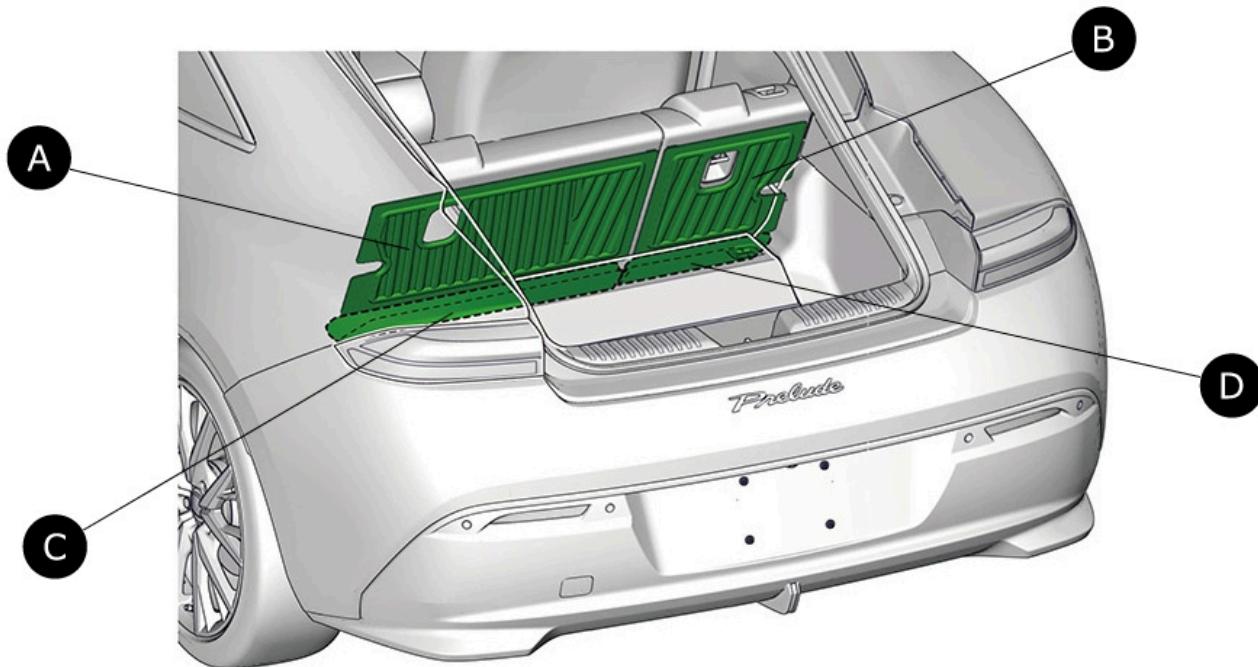


REAR SEAT-BACK PROTECTORS

2026 Prelude
MODEL SERIESPublications No.
VERSION 1**GENERAL VIEW**

QP03101BN

A	LEFT REAR SEAT-BACK PROTECTOR
B	RIGHT REAR SEAT-BACK PROTECTOR
C	LEFT CARGO FLOOR FLAP COVER
D	RIGHT CARGO FLOOR FLAP COVER

FOR YOUR SAFETY (Read carefully.)

■ Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

*All symbols are not used in all installation instructions.

DANGER

You will be killed or seriously hurt if you do not follow the instructions.

WARNING

You can be killed or seriously hurt if you do not follow the instructions.

CAUTION

You can be hurt if you do not follow the instructions.

NOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

NOTE

Gives helpful information or instructions to be followed when installing this product.





Indicates a prohibited action.




Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.

	The location on the vehicle.		The location in the vehicle. (Instrument panel.)
	Wear eye protection.		Wear heavy gloves.
	Work by two or more people.		Place the part on a blanket.
	Mark with felt-tip pen.		Mark with pushpin. (Pierce through.)
	Mark with center punch.		Remove any burrs.
	Use touch-up paint and allow to dry.		Wrap the masking tape around the flat-tip screwdriver.
	Return the original part to the customer. (Do not reuse.)		Apply firm pressure while rolling, especially at the ends, to set the adhesive.
	Press firmly.		Tighten to the specified torque.
	Work perpendicularly.		Clean with isopropyl alcohol.

These icons indicate the name of part or location (also contain other instructions).

	Name of part or location, etc.
	Action or work instruction
	Order of work
	Position of clip
	Position of retaining tab
	Quantity

Safety: General

CAUTION

Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.

NOTICE


- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts.

NOTE

The illustrations may differ slightly from the actual accessory.

PARTS LIST

Rear Seat-back Protectors Kit (P/N 08P30-36W-100)



Parts	Parts name	QTY	Remarks
	Left rear seat-back protector	1	
	Right rear seat-back protector	1	
	Left cargo floor flap cover	1	
	Right cargo floor flap cover	1	

INSTALLATION

Installing the Rear Seat-back Protectors

1


Fold down the left and right rear seat-backs.

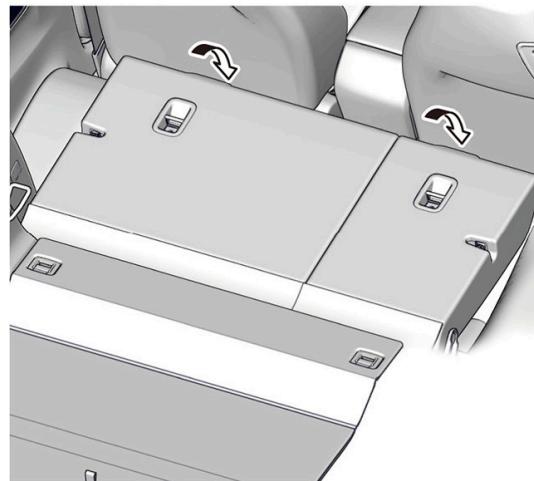

QQ32607AD

2


Remove the protective clothes.

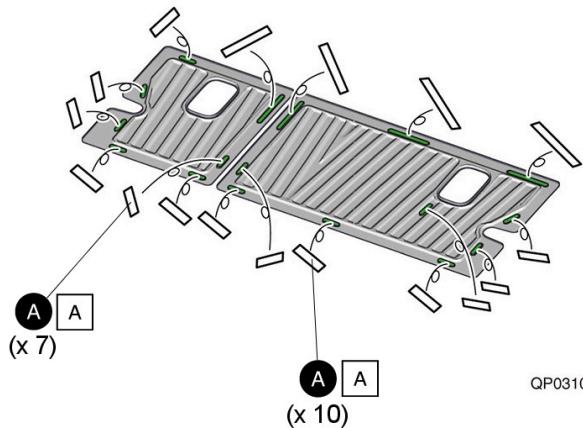

	PROTECTIVE CLOTH
	Remove.

QP03105AN


3 Position the left and right rear seat-back protectors.

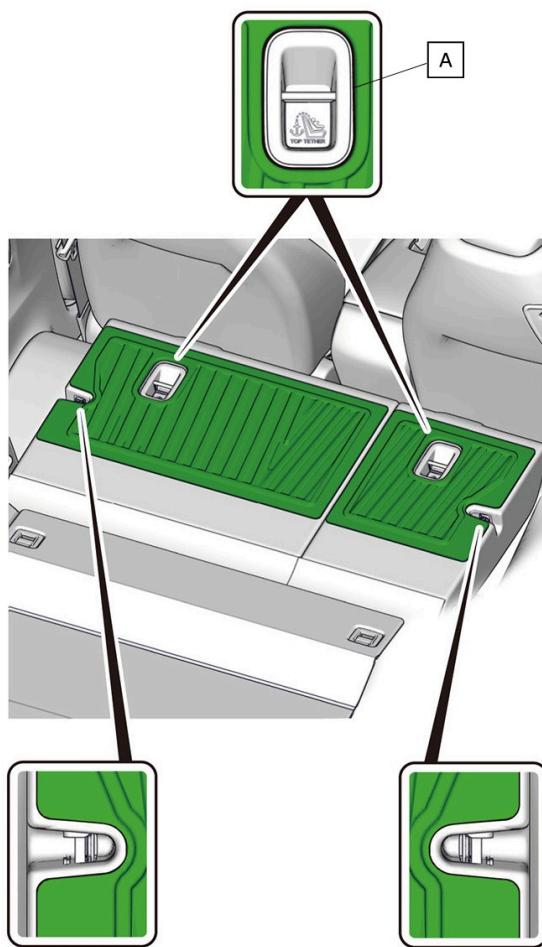

A Line up with the tether anchor cover.

QP03107BN

4 Secure the left and right rear seat-back protectors.

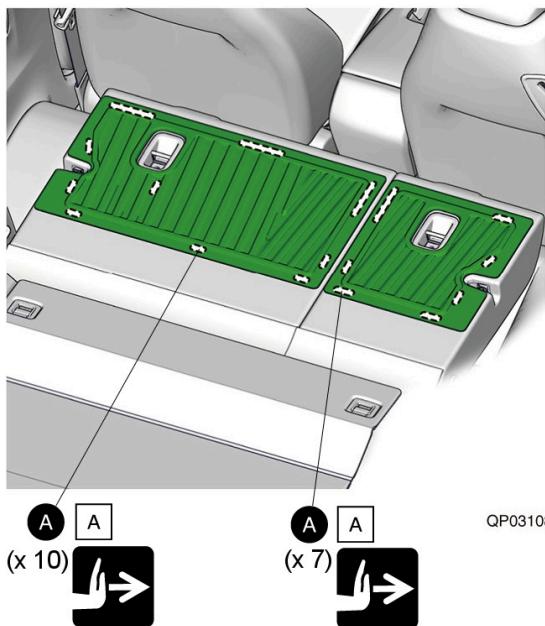


	FASTENER
	Attach the fasteners by firmly pressing them back and forth and left and right.

Installing the Cargo Floor Flap Covers

5 Remove the protective clothes.




	PROTECTIVE CLOTH
	Remove.

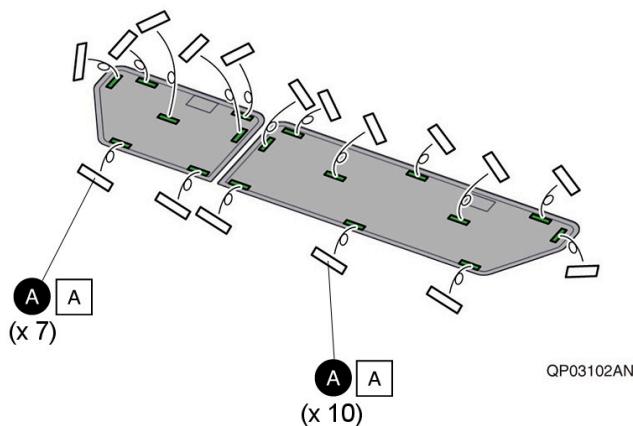

6 Position the left and right cargo floor flap covers.


NOTE

Make sure that there is no gap between the cargo floor flap covers and the rear seat-back protectors.

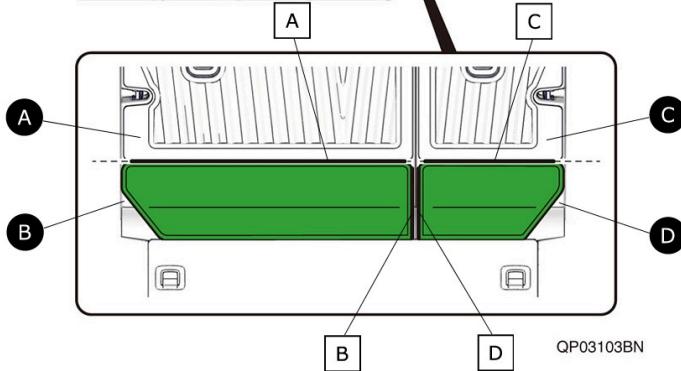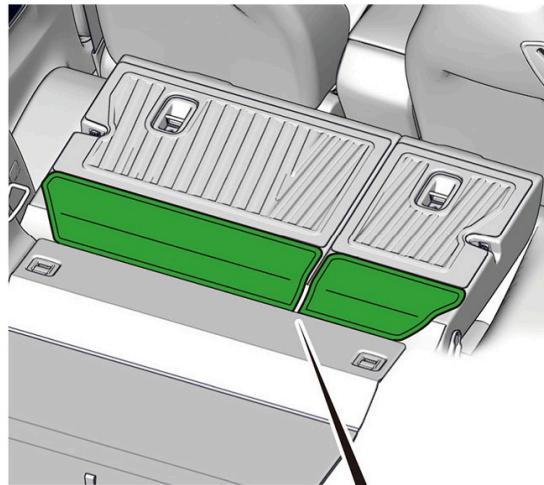

A	LEFT REAR SEAT-BACK PROTECTOR
B	LEFT REAR SEAT-BACK
C	RIGHT REAR SEAT-BACK PROTECTOR
D	RIGHT REAR SEAT-BACK
<input type="checkbox"/> A	Line up with the edge of the left rear seat-back protector.
<input type="checkbox"/> B	Line up with the left rear seat-back.
<input type="checkbox"/> C	Line up with the edge of the right rear seat-back protector.
<input type="checkbox"/> D	Line up with the right rear seat-back.

7 Secure the left and right cargo floor flap covers.

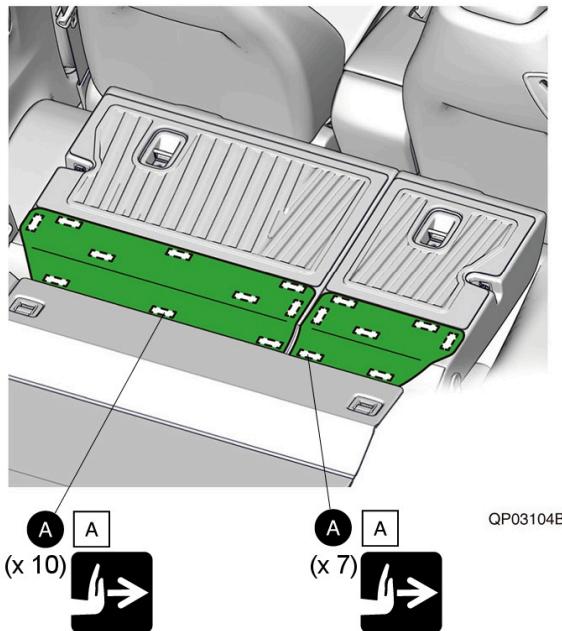

A	FASTENER
A	Attach the fasteners by firmly pressing them back and forth and left and right.

8 Raise the left and right rear seat-backs.

9 Check that all parts are installed properly.