



## HONDA INSTALLATION INSTRUCTIONS

### Accessory

REAR SEAT COVERS  
P/N 08P32-T6Z-100

### Application

2018 RIDGELINE

### Publications No.


VERSION 1

### Issue Date

JUL 2017

## PARTS LIST

Rear seat covers




### Illustration of the Rear Seat Covers in the Vehicle




## INSTALLATION

### NOTE:


- Do not damage the vehicle during installation.
  - Do not install the seat covers on the front seat. Improperly covering the front seat may prevent the side airbag from inflating during a side impact.
  - Identify each seat cover by the tag on the back.
1. While pressing on each head restraint guide button, remove the head restraints by pulling them upward.

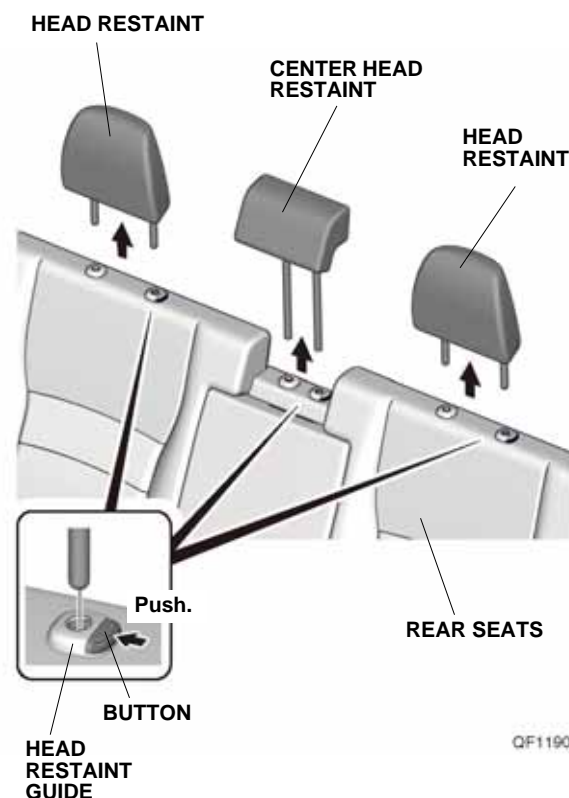


- Fit the head restraint covers over the head restraints as shown.

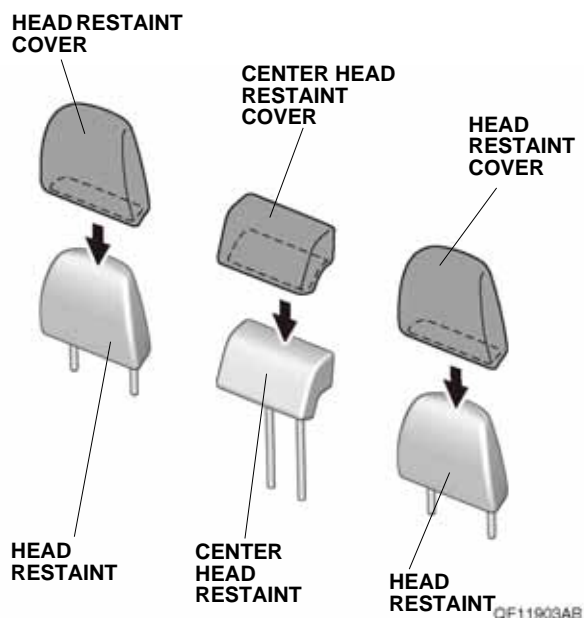


- Pull down the armrest and fit the right rear seat-back cover onto the right rear seat-back. Insert the right rear seat-back cover under each head restraint guide.

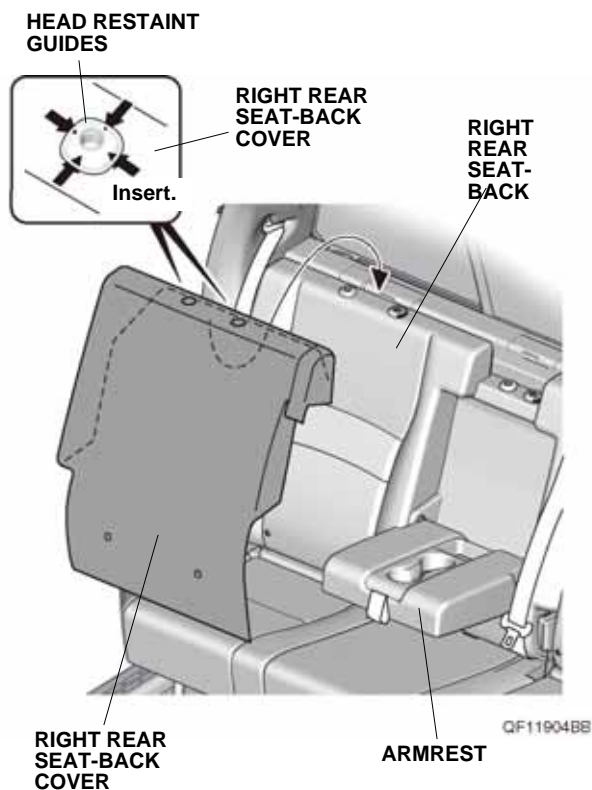

- Insert the right rear seat-back cover and the three tabs into the right rear seat-back.

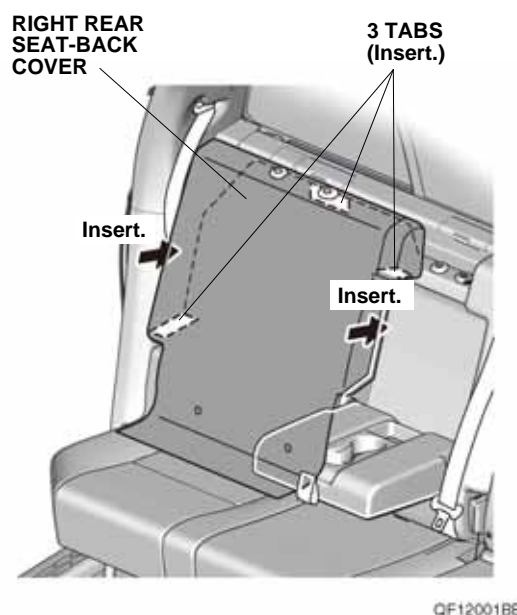


- Raise the armrest and right rear seat cushion. Pull out the right rear seat-back cover between the right rear seat-back and right rear seat cushion. Insert the right rear seat-back cover between the right rear seat-back and each anchor, then secure the right rear seat-back cover with one fastener.

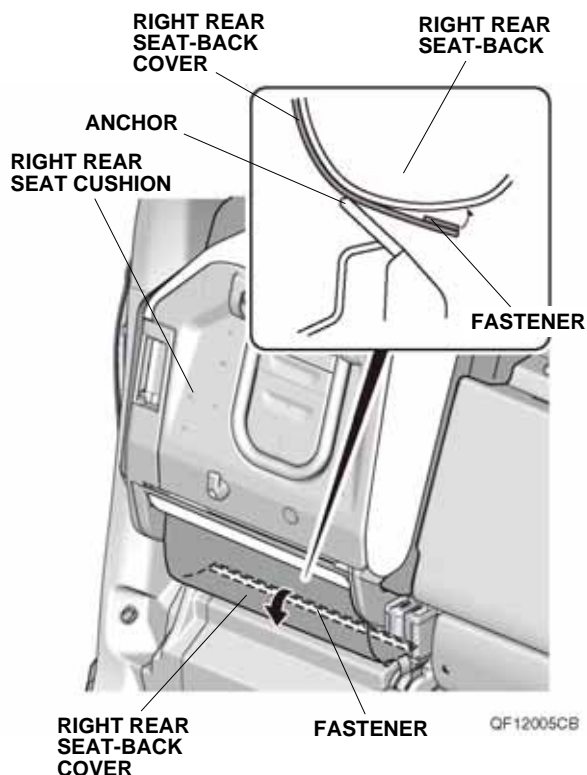


- Pull down the right rear seat cushion and armrest.


7. Fit the armrest cover onto the armrest.

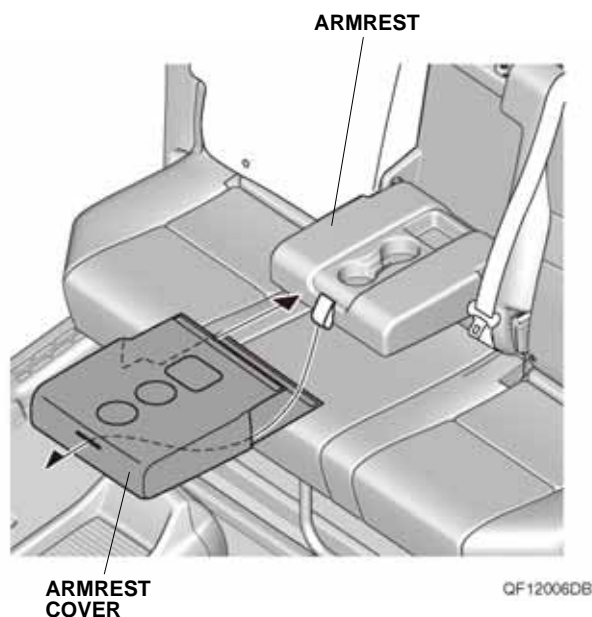


8. Raise the armrest. Pull out the armrest cover between the armrest and the rear seat-back and secure the armrest cover with the fasteners as shown.

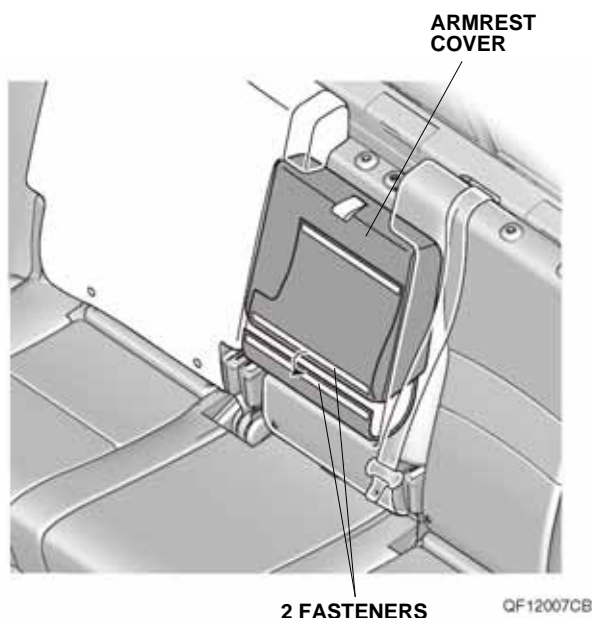


9. Pull down the armrest. Fit the left rear seat-back cover onto the left rear seat-back through the center seat belt. Insert the left seat-back cover under each head restraint guide.

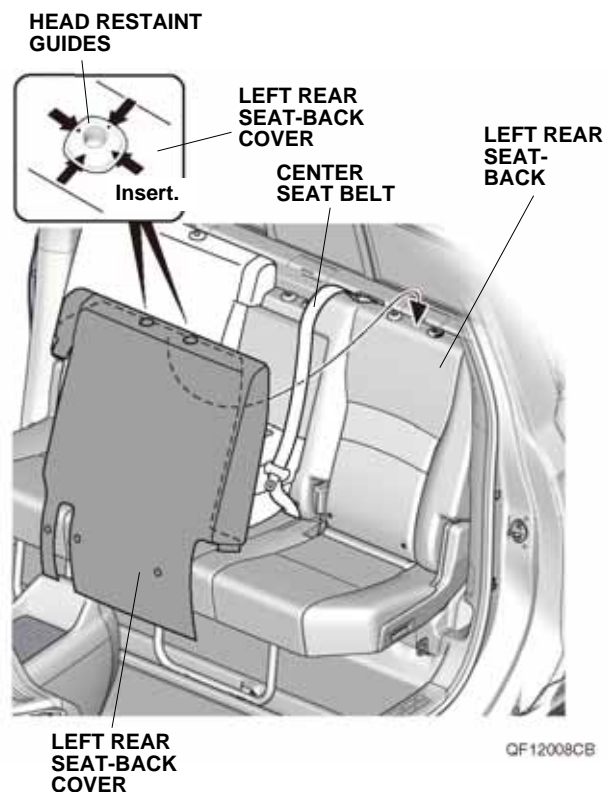

10. Insert the left rear seat-back cover and the three tabs into the left rear seat-back.

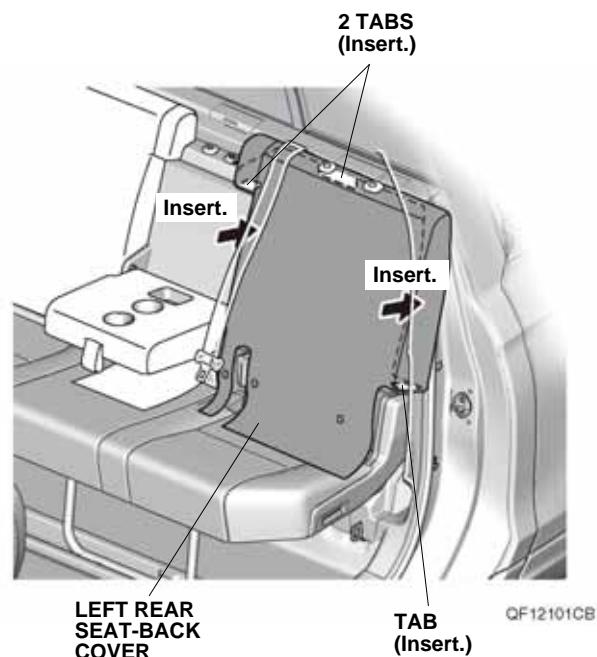


11. Raise the armrest and left rear seat cushion. Pull out the left rear seat-back cover between the left rear seat-back and left rear seat cushion. Insert the left rear seat-back cover between the left rear seat-back and each anchor, then secure the armrest cover and the left rear seat-back cover with the three fasteners.

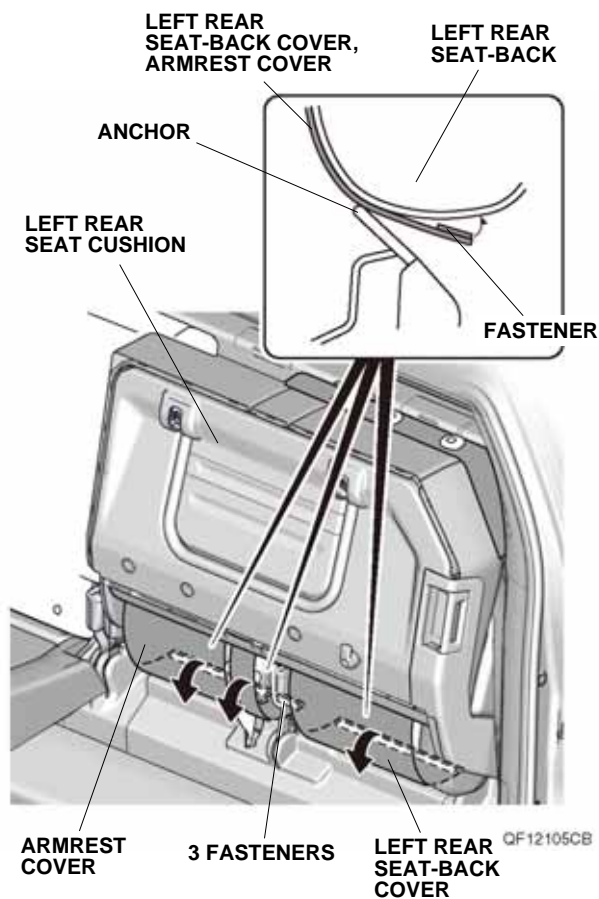


12. Pull down the left rear seat cushion.

13. Fit the left rear seat cushion cover onto the left rear seat cushion.

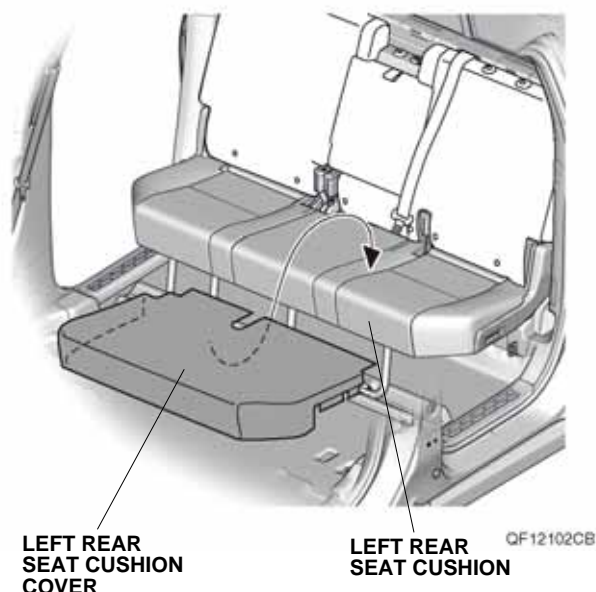


14. Raise the left rear seat cushion and secure the left rear seat cushion cover with the eight hooks and two tabs.

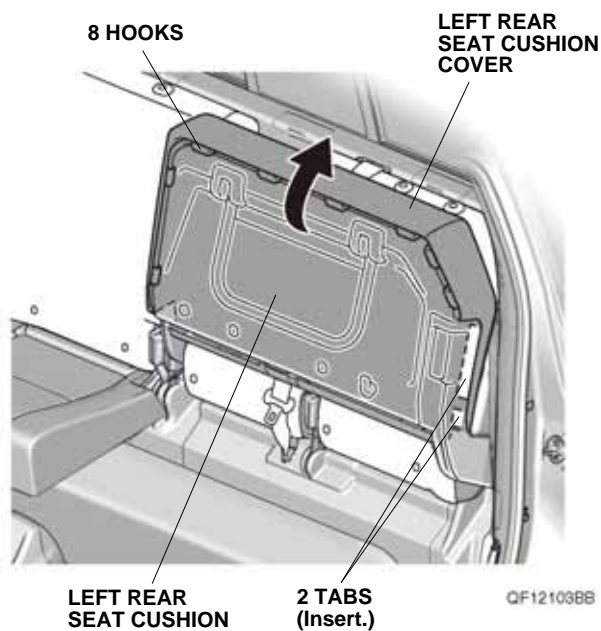





15. Secure the left rear seat cushion cover with the two fasteners.

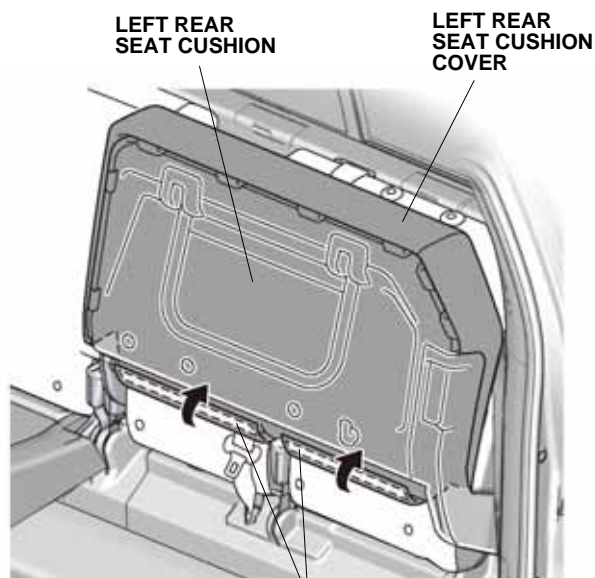


16. Pull down the left rear seat cushion.  
17. Fit the right rear seat cushion cover onto the right rear seat cushion.

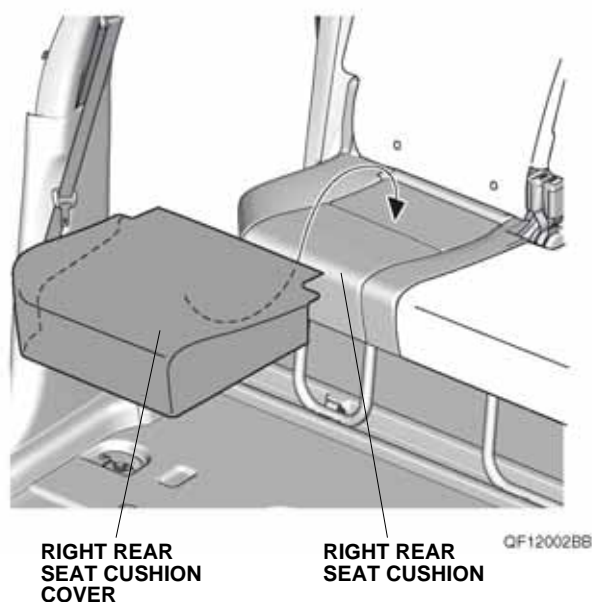

18. Raise the right rear seat cushion and secure the right rear seat cushion cover with the six hooks and two tabs.

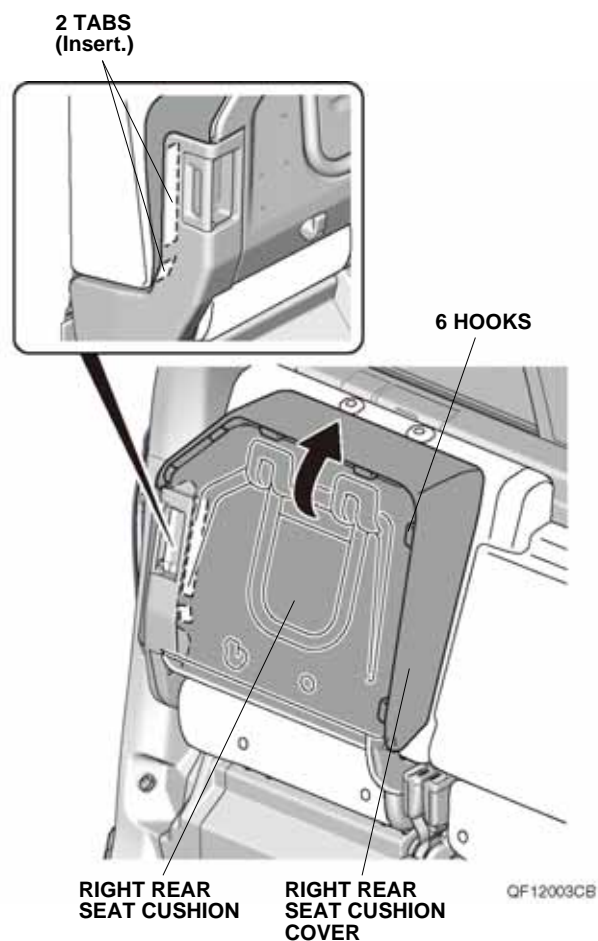

19. Secure the right rear seat cushion cover with one fastener.

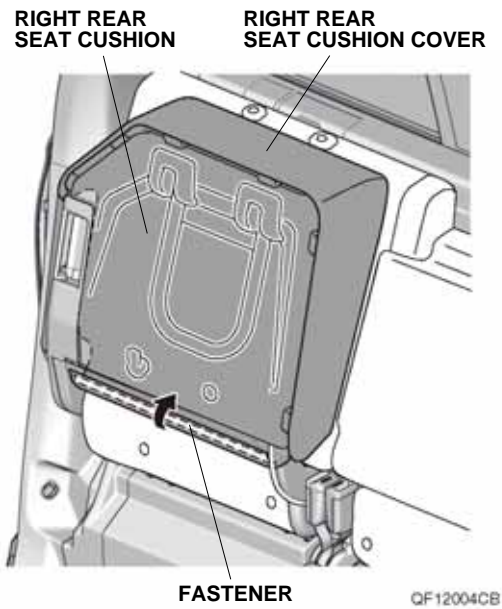

20. Pull down the right rear seat cushion.
21. Install each head restraint into the rear seats.