



# INSTALLATION INSTRUCTIONS

Accessory

REAR SPLASH GUARDS  
P/N 08P09-S9V-101

Application

2006 PILOT

Publications No.


All 30506

Issue Date


SEP 2005

## PARTS LIST

Left rear splash guard



Right rear splash guard



6 Self-tapping screws, 5 x 25 mm



2 Clip nuts



## TOOLS REQUIRED


Stubby Phillips screwdriver

Phillips screwdriver


## INSTALLATION

NOTE: These installation instructions show the left rear splash guard being installed; the same procedure applies to installing the right rear splash guard.

1. Remove the two self-tapping screws from the rear bumper and the inner fender.

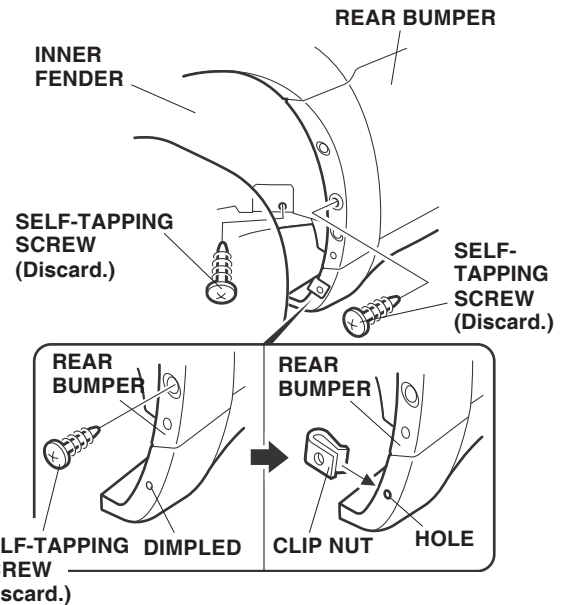

2. Piece the dimpled area of the rear bumper with a self-tapping screw. Remove the screw, and slide one clip nut over each dimpled hole.
3. Position the left rear splash guard on the inner fender and rear bumper, and install the three 5 x 25 mm self-tapping screws.

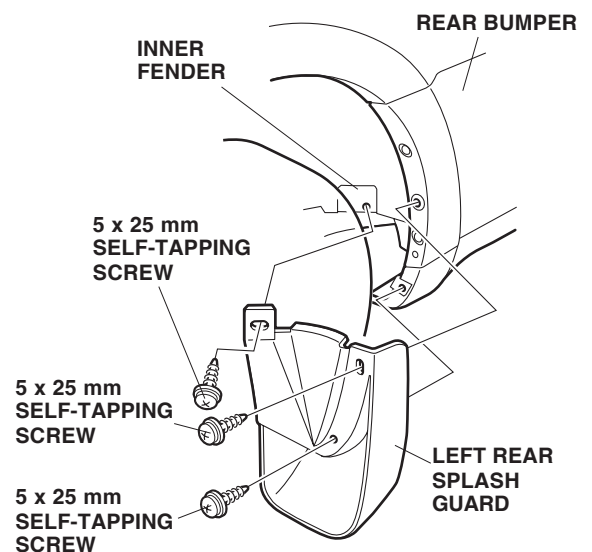

4. Repeat steps 1 through 3 to install the right splash guard.