



INSTALLATION INSTRUCTIONS

Accessory
WIRELESS CHARGER

Application
2021 ODYSSEY

Publications No.
VERISON 1
Issue Date
JUL 2020

PARTS LIST

Wireless Charger Attachment Kit
P/N 08U58-THR-100B

Wireless charger panel



4 Self-tapping screws



8 Clips
(Some may not be used)



Wireless Charger Unit Kit
P/N 08U58-THR-100C

Wireless charger unit




TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver
10 mm Open end wrench
Shop towel

The following tools are available through the Honda Tool and Equipment Program. On the iN, click on Service > Service Bay > Tool and Equipment Program, then enter the number under "Search." Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)
- Plastic Trim Tool (T/N SILTRIMTL10)

Illustration of the Wireless Charger in the Vehicle

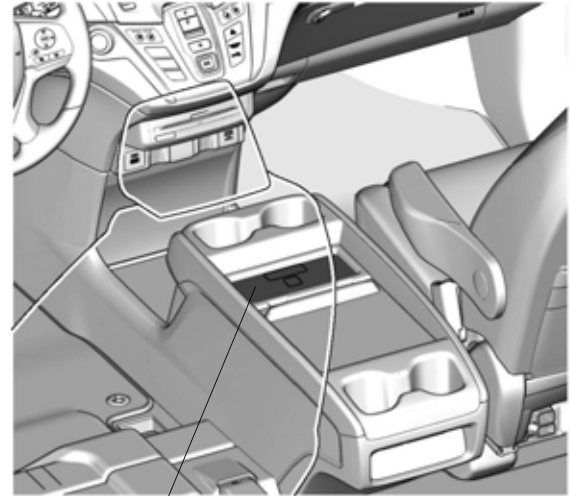

WIRELESS CHARGER UNIT



QJ92001AA

INSTALLATION

Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

1. Disconnect the negative cable from the battery:
 - Wrap a shop towel around the hood latch lever.

HOOD LATCH LEVER
(Wrap with a shop towel.)

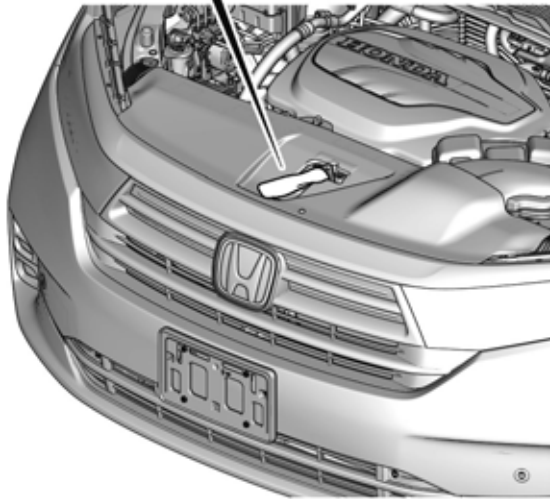


QJ92002AB

- Remove the front bulkhead cover.

FRONT BULKHEAD COVER

8 CLIPS

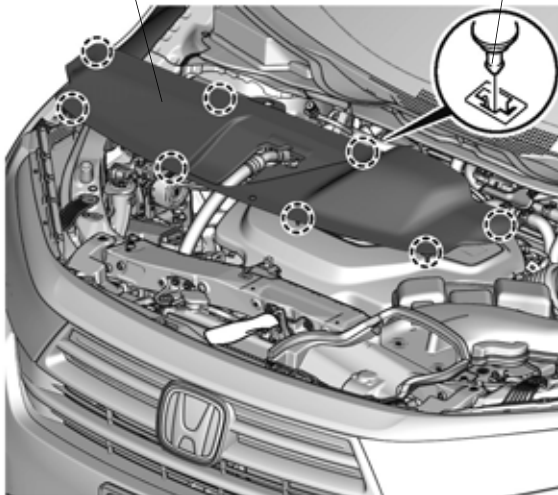


QJ92003AB

- Remove the intake air tube.
- Disconnect the negative cable from the battery.

2 CLIPS

INTAKE AIR TUBE

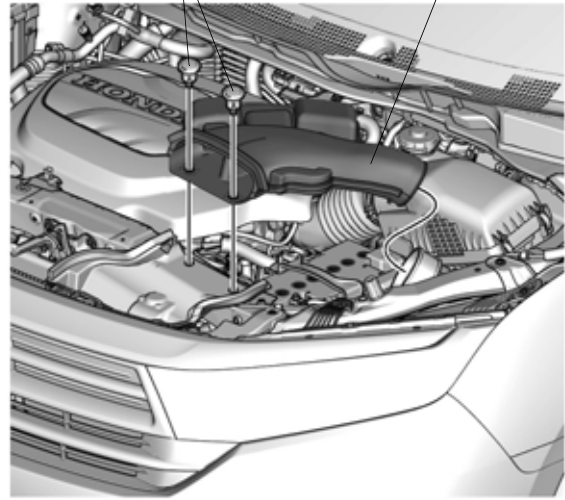


QJ92004AB

2. Using a trim tool, pry up on the rear of the center console trim to release the clips and retaining tabs. Remove the center console trim.

20 CLIPS

CENTER CONSOLE TRIM

2 RETAINING TABS

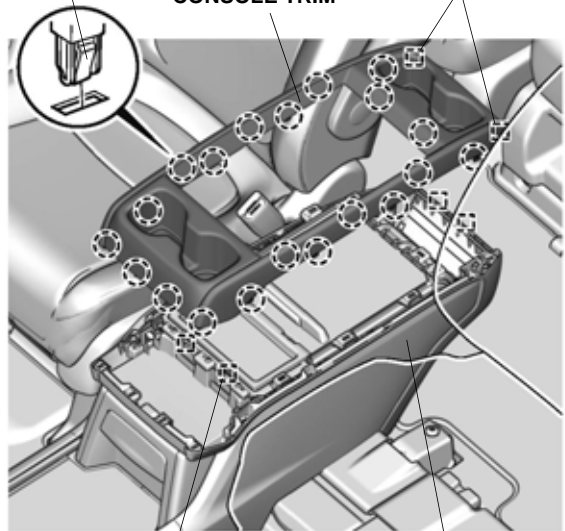


4 RETAINING TABS

CENTER CONSOLE


QJ92002AA

- If equipped, open the shutter.

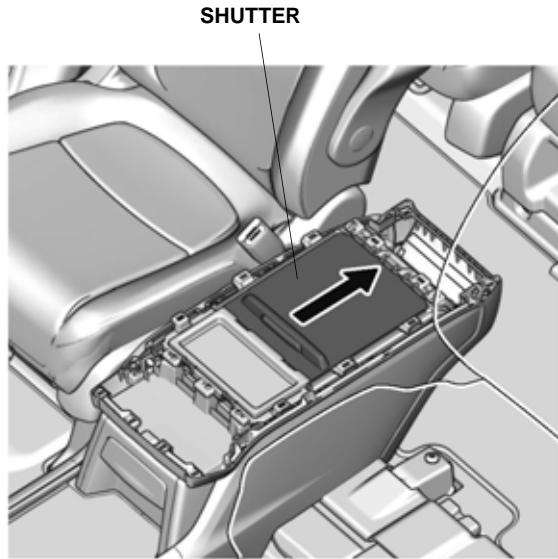

QJ92003AA


- Remove the tray and unplug the vehicle connector.

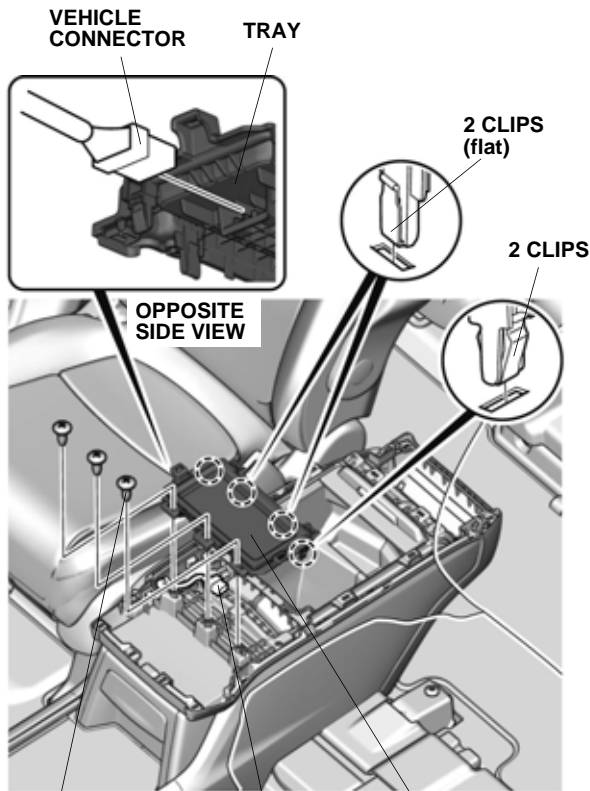

QJ92004BA


3 SELF-TAPPING SCREWS VEHICLE CONNECTOR TRAY

- Remove the two clips and two clips (flat) from the tray, and install them to the wireless charger panel. NOTE: Make sure to install the clips in the correct position and orientation.

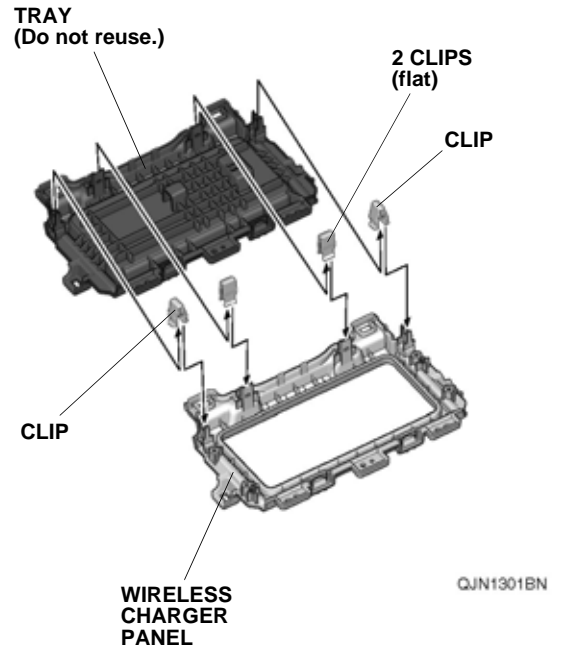


QJN1301BN

- Install the wireless charger unit on the wireless charger panel with four self-tapping screws.

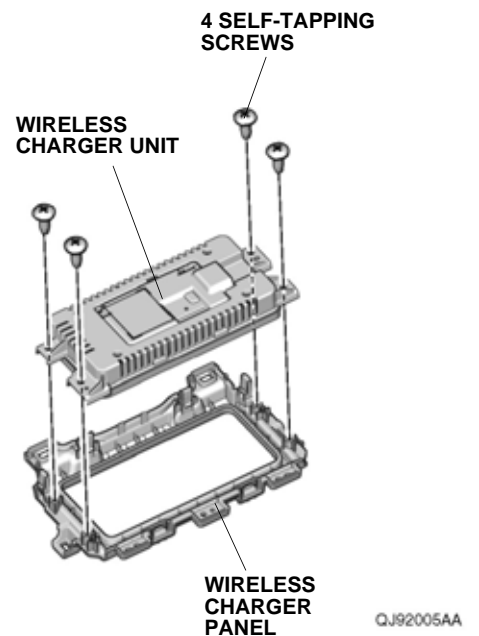


QJ92005AA

7. Plug the vehicle 7-pin connector into the wireless charger unit, and secure the wireless charger unit to the center console as shown.

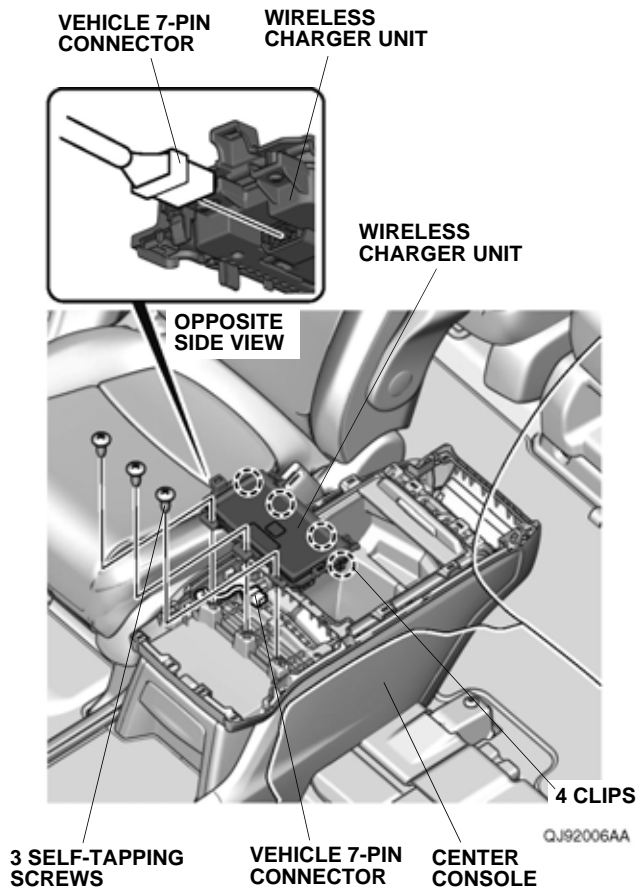

8. Make sure none of the clips are broken. If a clip is broken, replace it with one of the clips supplied in this kit.
NOTE: Make sure to install the clips in the correct orientation.

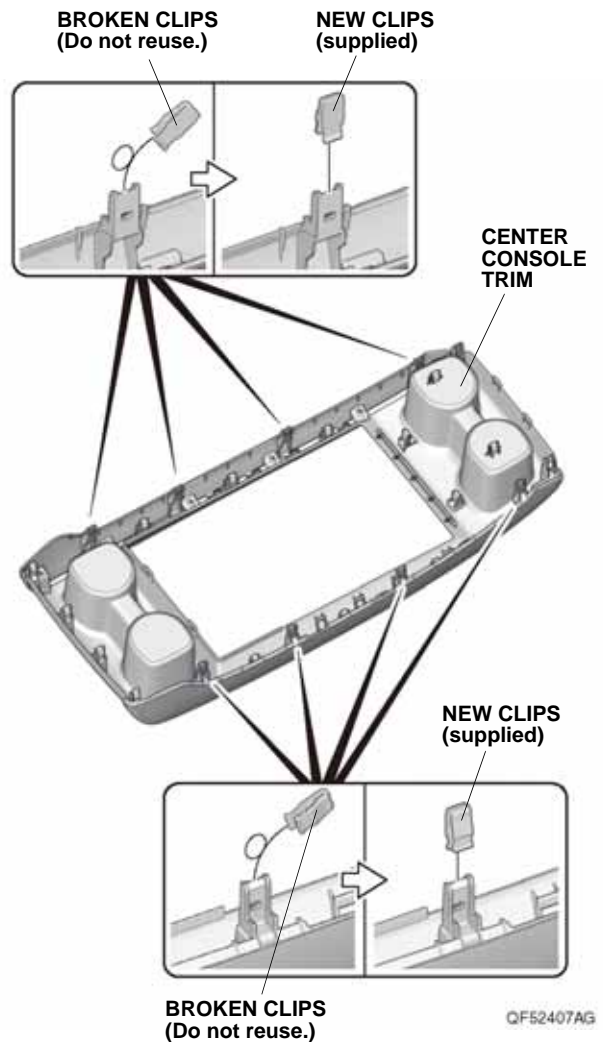

9. Install the center console trim.
10. Check that all wire harnesses are routed properly and all connectors are plugged in.
11. Connect the negative cable to the battery.
12. Install the front bulkhead cover and the intake air tube.
13. Press and hold the audio unit power button for 2 seconds to restore the audio and navi (if equipped) system functions.
14. Set the clock on vehicles without navigation.
15. If necessary, restore the systems back to normal operation as described in the service information.

Check the Operation of the Wireless Charger

16. Check that the wireless charger work properly as described in the vehicle owner's manual.