




REAR EMBLEMS	2026 PASSPORT MODEL SERIES	Publications No. VERSION 1
--------------	-------------------------------	-------------------------------

GENERAL VIEW

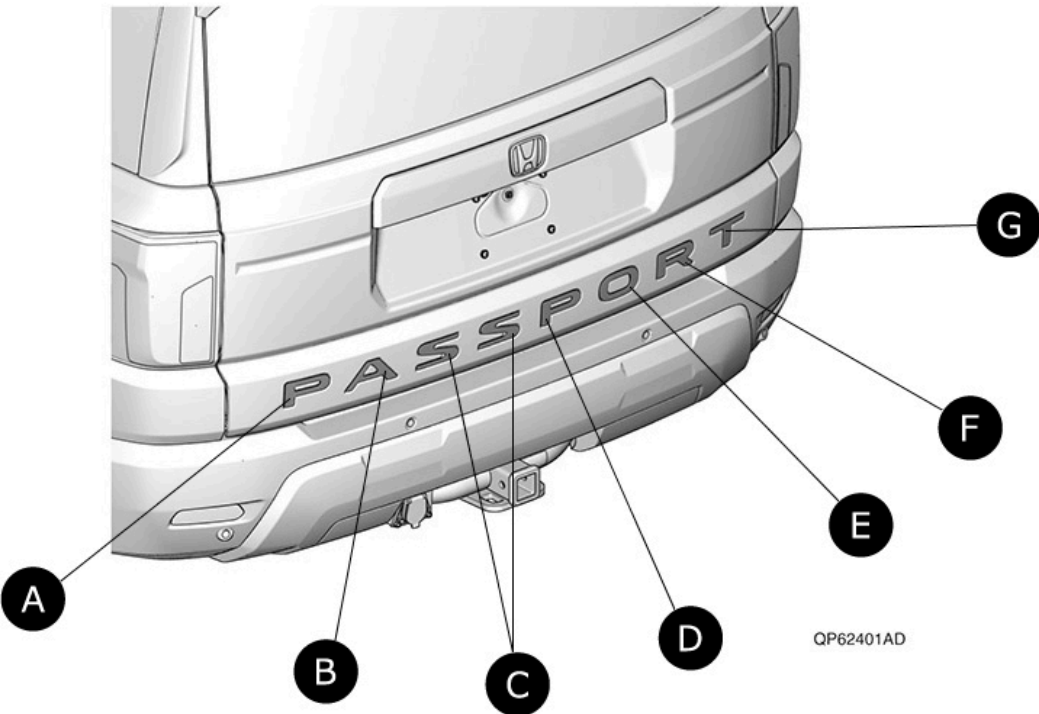

A	P EMBLEM (outer)
B	A EMBLEM
C	S EMBLEM(2)
D	P EMBLEM (inner)
E	O EMBLEM
F	R EMBLEM
G	T EMBLEM

FOR YOUR SAFETY (Read carefully.)

Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

*All symbols are not used in all installation instructions.

DANGER

You will be killed or seriously hurt if you do not follow the instructions.

WARNING

You can be killed or seriously hurt if you do not follow the instructions.

CAUTION

You can be hurt if you do not follow the instructions.

NOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

NOTE

Gives helpful information or instructions to be followed when installing this product.

















Indicates a prohibited action.

Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

*All icons are not used in all installation instructions.

	The location on the vehicle.		The location in the vehicle. (Instrument panel.)
	Wear eye protection.		Wear heavy gloves.
	Use an assistant.		Place the part on a blanket.
	Work perpendicular.		Remove any burrs.
	Use touch-up paint and allow to dry.		Tighten to the specified torque.
	Apply firm pressure while rolling, especially at the ends, to set the adhesive.		Press firmly.
	Clean with isopropyl alcohol.		Return the original part to the customer. (Do not reuse.)

Safety: General









- Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and safety of others.
- Always use the parts and tools specified in the installation instructions.
- Be careful not to damage the vehicle or the parts.
- The illustrations may differ slightly from the actual accessory.

| Safety: Accessory








- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60°F (15°C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle for 24 hours to allow the adhesive to cure.

PARTS LIST

■ Rear Emblems Kit (P/N 08F20-3BM-100) (P/N 08F20-3BM-100F)

Parts	Parts name	QTY	Remarks
	P emblem (outer)	1	
	A emblem	1	
	S emblem	2	
	P emblem (inner)	1	
	O emblem	1	
	R emblem	1	
	T emblem	1	
	Alcohol wipe	4	

■ Rear Emblems Kit (P/N 08F20-3BM-P00) (P/N 08F20-3BM-P00F)

Parts	Parts name	QTY	Remarks
	P emblem (outer)	1	
	A emblem	1	
	S emblem	2	
	P emblem (inner)	1	
	O emblem	1	
	R emblem	1	
	T emblem	1	

REQUIRED TOOLS AND SUPPLIES

- Masking tape
- Ruler

The following tool is available through the Honda Tool and Equipment Program:
Rubber Roller (T/N MHLE54D)



INSTALLATION

■ Installing the Rear Emblems

1 Clean the attaching areas.

NOTE

Allow to dry thoroughly.

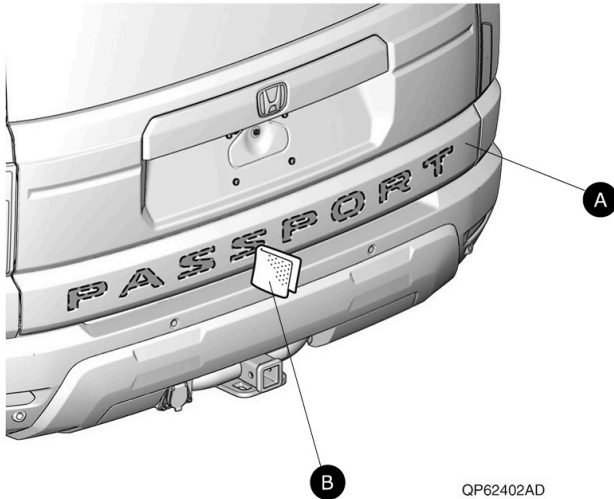



A	TAILGATE
B	ALCOHOL WIPE(4)



2 Line up the P emblem (outer).

NOTE

Make sure to prepare the correct shape of the adhesive backing before proceeding with the installation.

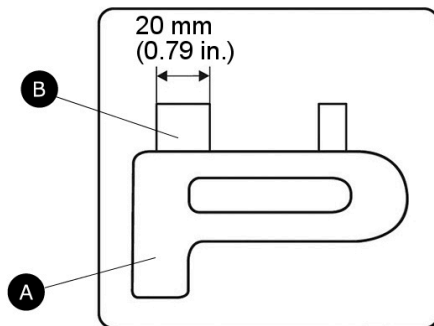



A	P EMBLEM (outer)
B	ADHESIVE BACKING
C	TAILGATE
D	END OF THE CURVED SURFACE
A	Equal spacing.

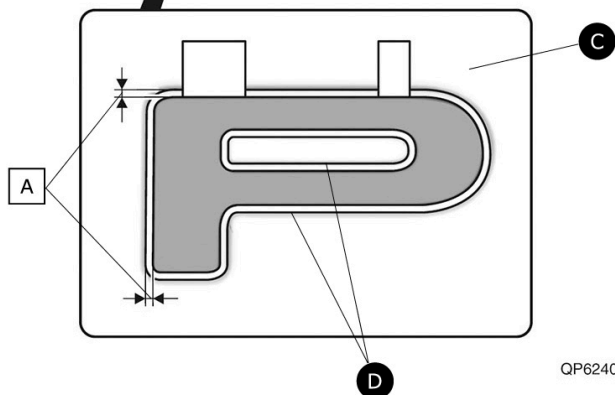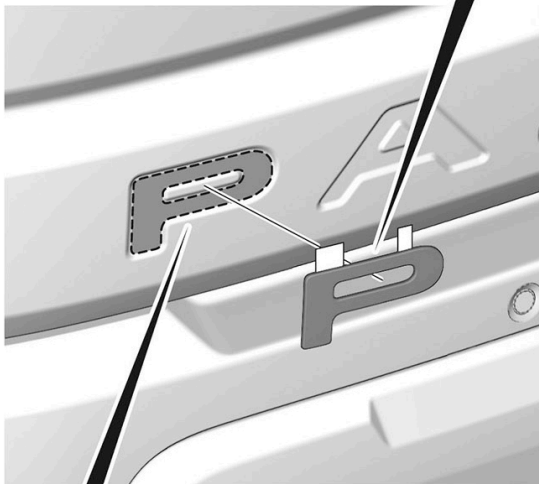

QP62403AD

3 Loosely secure the P emblem (outer).

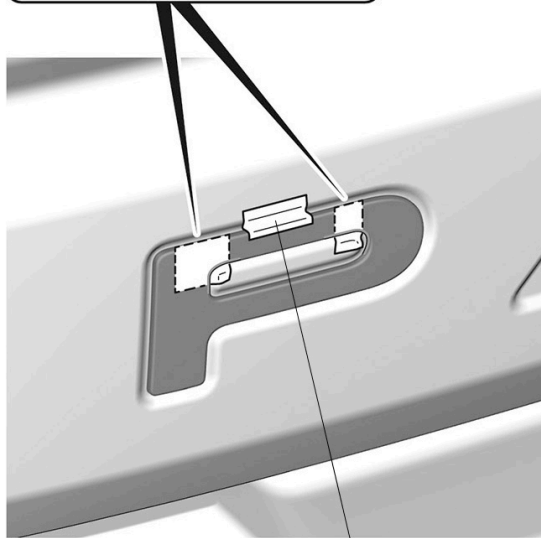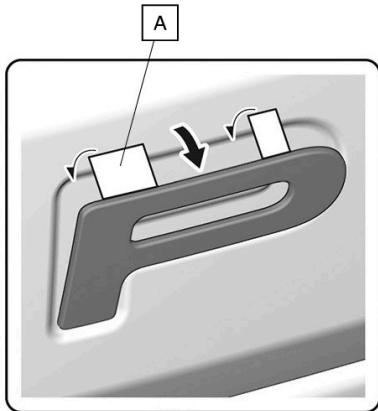



QP62501AD

A	Fold.
A	MASKING TAPE

4 Secure the P emblem (outer).

NOTE


Check the position of double-sided adhesive tape and make sure to press firmly.

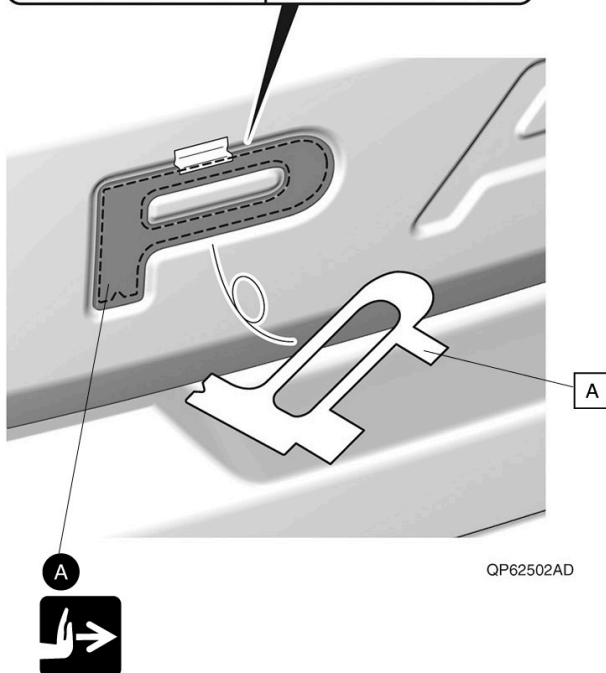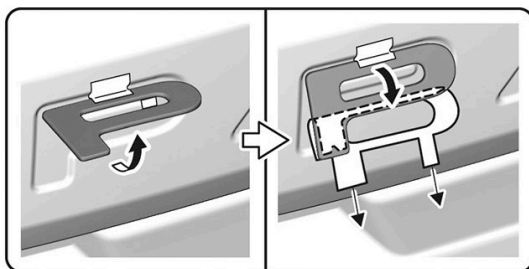

A	Remove.
A	DOUBLE-SIDED ADHESIVE TAPE


5 Remove the masking tape.

6 Secure the P emblem (outer).

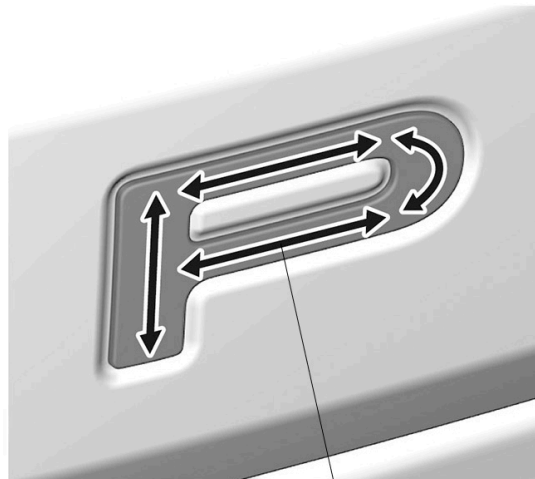

QP62503AD


7 Line up the A emblem.

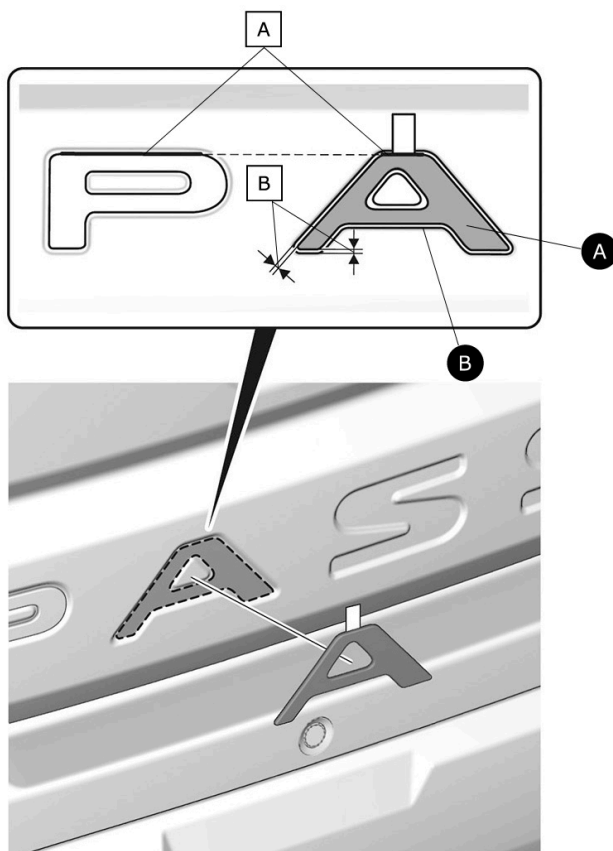

A	A EMBLEM
B	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.

QP62504AD

8 Loosely secure the A emblem.

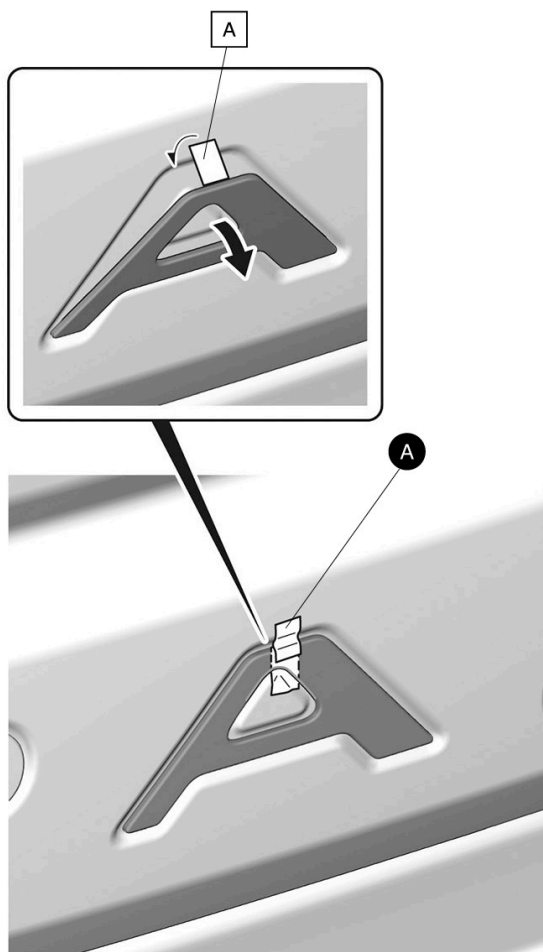



A	ADHESIVE BACKING (Fold.)
A	MASKING TAPE

QP62505AD

9 Secure the A emblem.

NOTE

Check the position of double-sided adhesive tape and make sure to press firmly.

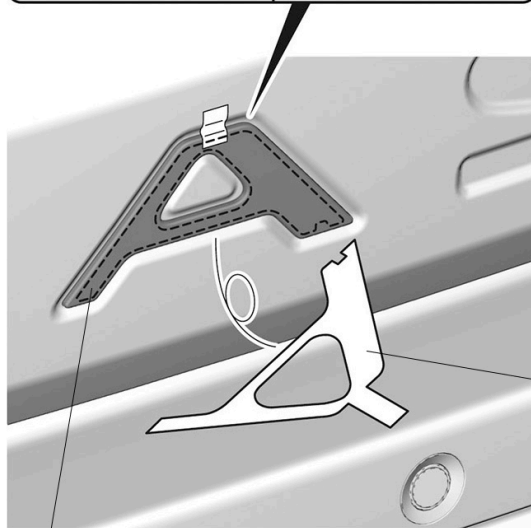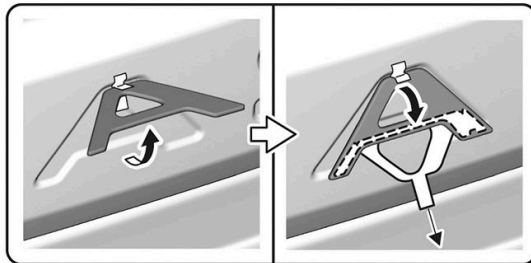

QP62601AD



A	Remove.
A	DOUBLE-SIDED ADHESIVE TAPE

10 Remove the masking tape.

11


Secure the A emblem.



QP62602AD

12



Line up the S emblem.

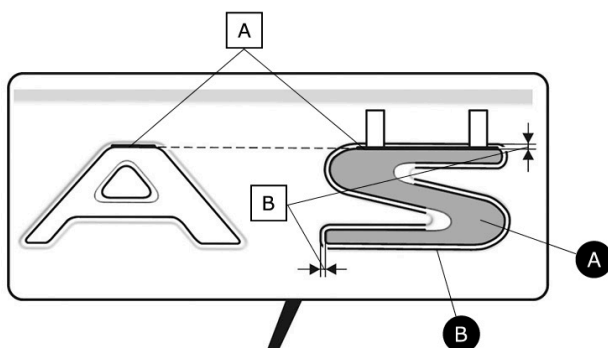

QP62603AD

A	S EMBLEM
B	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.

13 Loosely secure the S emblem.

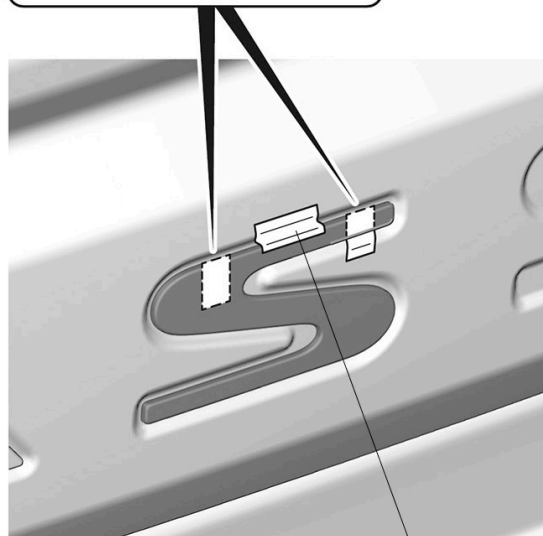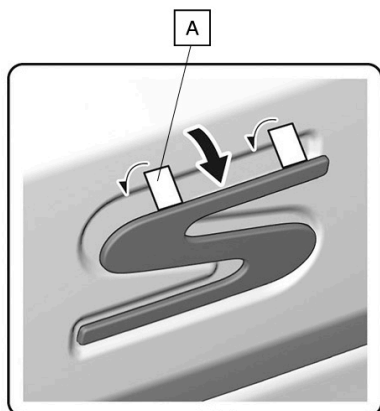



QP62604AD

A	ADHESIVE BACKING (Fold.)
A	MASKING TAPE

14 Secure the S emblem.

NOTE

Check the position of double-sided adhesive tape and make sure to press firmly.

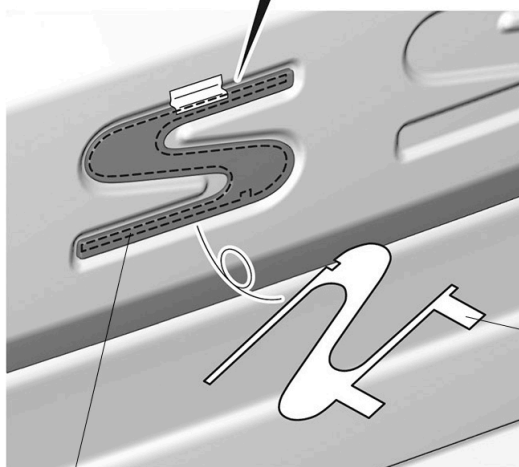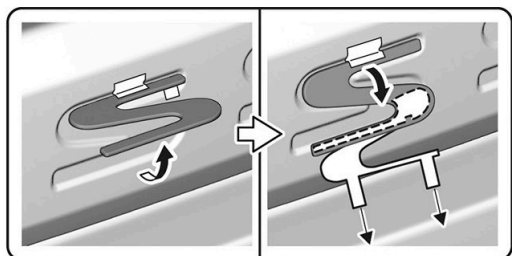

A

QP62605AD

A



A

Remove.

A

DOUBLE-SIDED ADHESIVE TAPE

15 Remove the masking tape.

16

Secure the S emblem.



QP62606AD





17

Repeat steps 12 through 16 for the S emblem.

18

Line up the P emblem (inner).

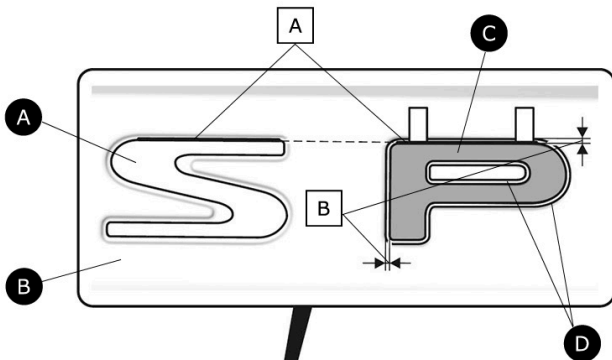


QP62607AD

A	S EMBLEM
B	TAILGATE
C	P EMBLEM (inner)
D	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.

19

Repeat steps 3 through 6 for the P emblem (inner).



20 Line up the O emblem.

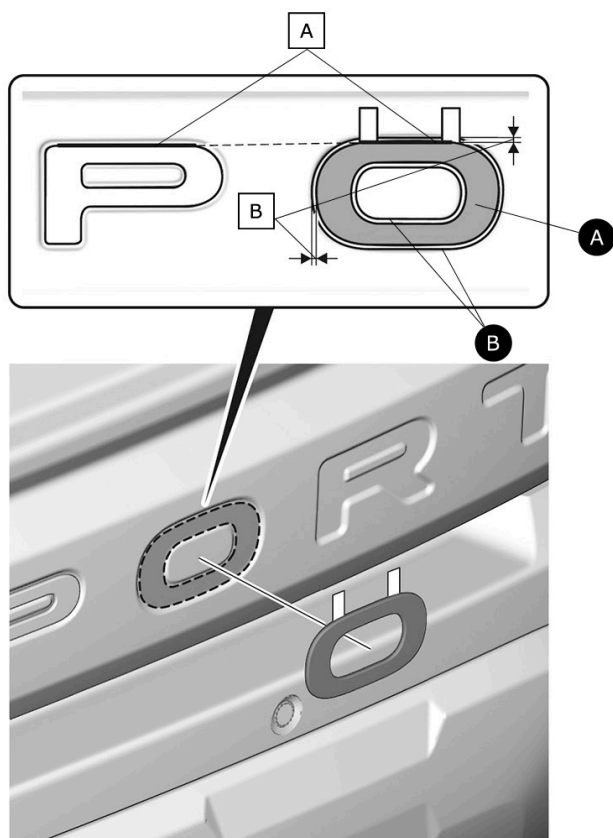

A	O EMBLEM
B	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.

QP62608AD

21 Loosely secure the O emblem.

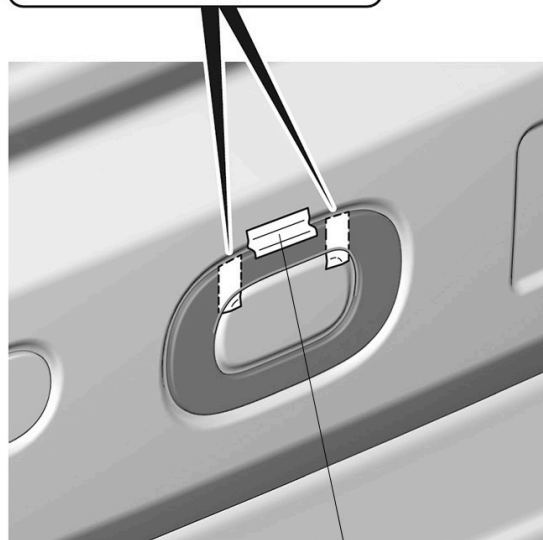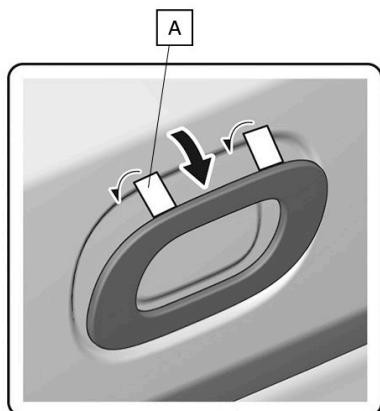

A



QP62609AD

A	ADHESIVE BACKING (Fold.)
A	MASKING TAPE

22 Secure the O emblem.

NOTE

Check the position of double-sided adhesive tape and make sure to press firmly.

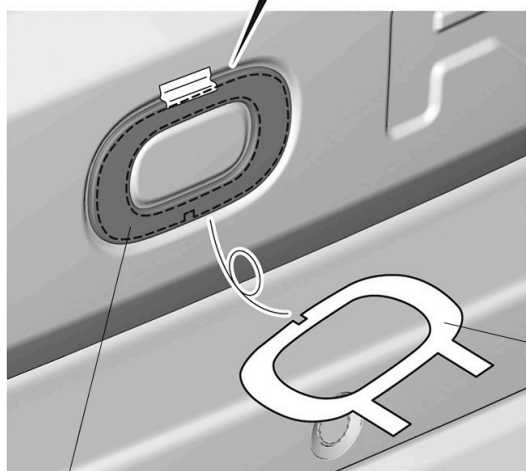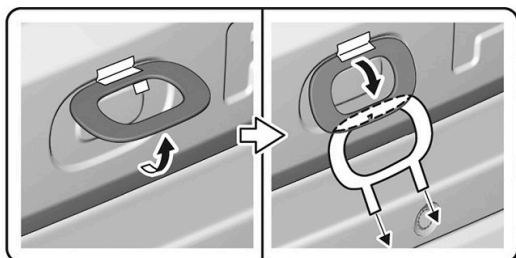

QP62610AD



A	Remove.
A	DOUBLE-SIDED ADHESIVE TAPE

23 Remove the masking tape.


24 Secure the O emblem.



QP62611AD



25 Line up the R emblem.


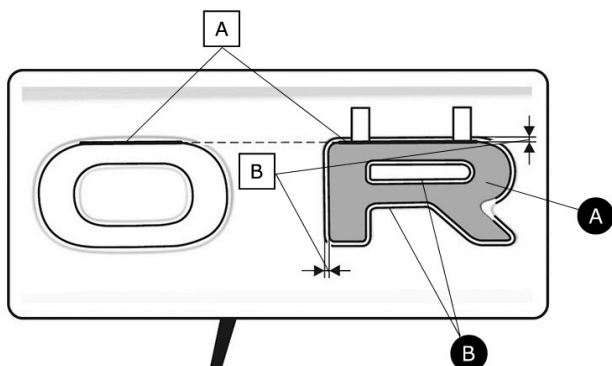


A	R EMBLEM
B	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.



QP62612AD

26 Loosely secure the R emblem.

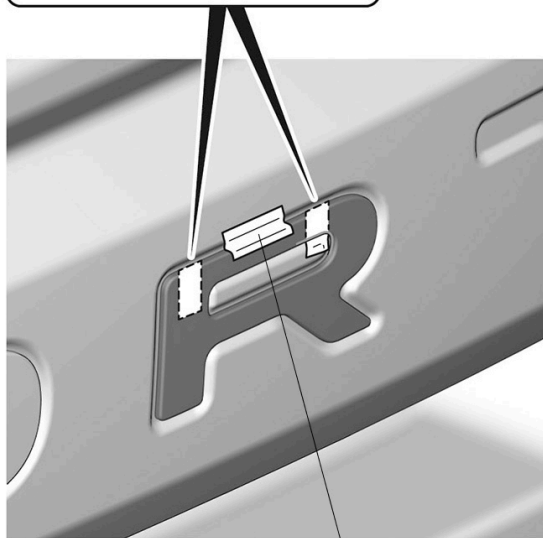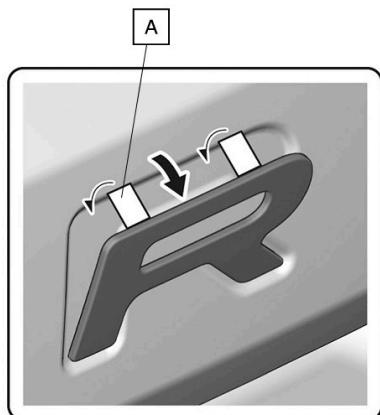

A



QP62701AD

A	ADHESIVE BACKING (Fold.)
A	MASKING TAPE

27 Secure the R emblem.

NOTE

Check the position of double-sided adhesive tape and make sure to press firmly.

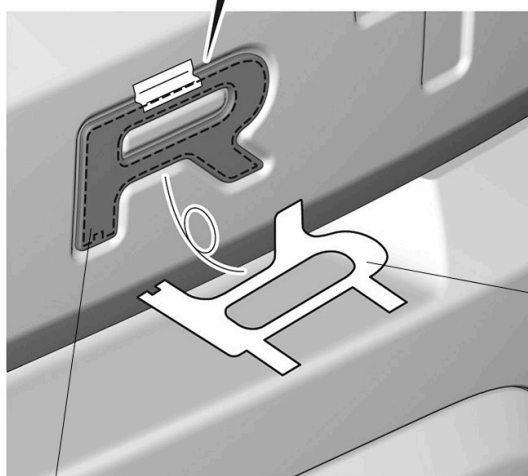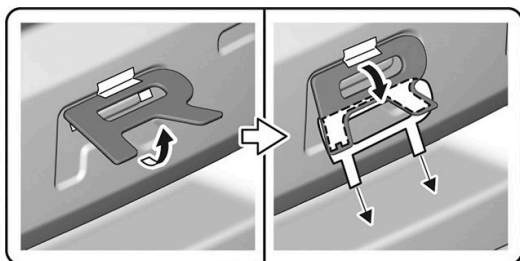

QP62702AD



A	Remove.
A	DOUBLE-SIDED ADHESIVE TAPE

28 Remove the masking tape.

29



Secure the R emblem.



QP62703AD





30 Line up the T emblem.

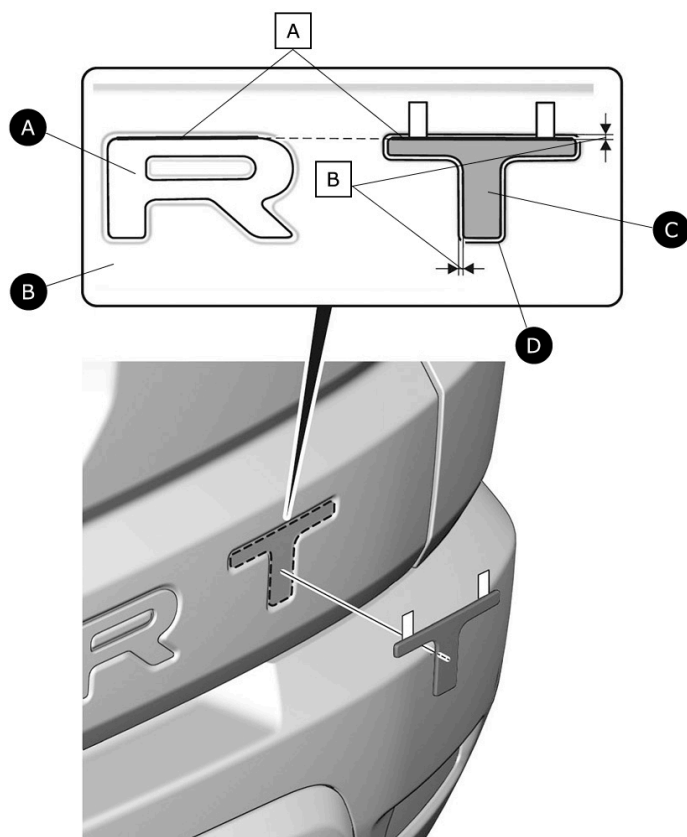

A	R EMBLEM
B	TAILGATE
C	T EMBLEM
D	END OF THE CURVED SURFACE
A	Line up.
B	Equal spacing.

QP62704AD

31 Loosely secure the T emblem.

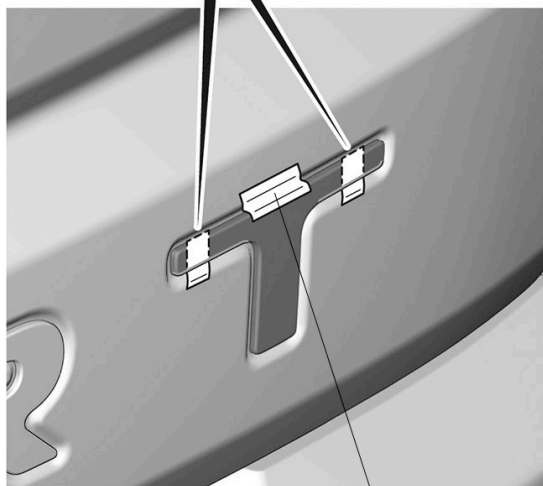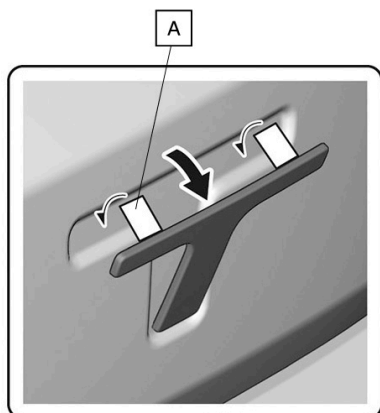



QP62705AD

A	ADHESIVE BACKING (Fold.)
A	MASKING TAPE

32 Secure the T emblem.

NOTE

Check the position of double-sided adhesive tape and make sure to press firmly.

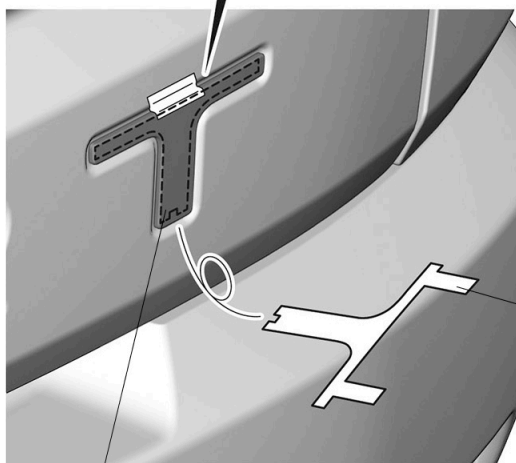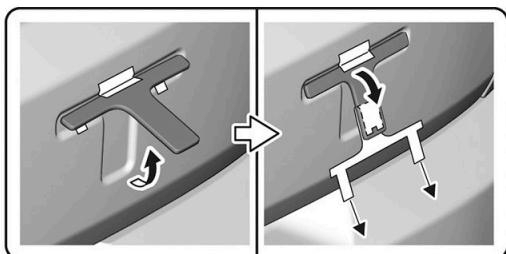

QP62706AD

A



A	Remove.
A	DOUBLE-SIDED ADHESIVE TAPE

33 Remove the masking tape.

34

Secure the T emblem.



QP62707AD

35

Check that all parts are installed properly.