




19" ALUMINUM WHEEL	2026 Prelude MODEL SERIES	Publications No. VERSION 1
--------------------	------------------------------	-------------------------------

GENERAL VIEW

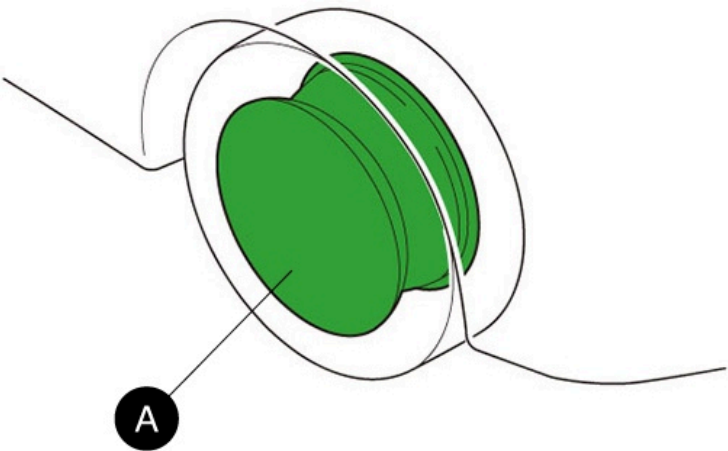

QP01702AD

<b>A</b>	ALUMINUM WHEEL
----------	----------------

## FOR YOUR SAFETY (Read carefully.)

### Warning Symbols

Safety: Your safety, and the safety of others, is important. To help you make informed decisions about service procedures, we have provided safety messages where appropriate. Of course, it is not practical or possible to warn you about all the hazards associated with servicing a vehicle - you must use your own good judgment.

You will find important safety messages preceded by one of the following symbols:

\*All symbols are not used in all installation instructions.

#### DANGER

You will be killed or seriously hurt if you do not follow the instructions.

#### WARNING

You can be killed or seriously hurt if you do not follow the instructions.

#### CAUTION

You can be hurt if you do not follow the instructions.

#### NOTICE

Gives advice to prevent damage to the product, vehicle, the environment or other property.

#### NOTE

Gives helpful information or instructions to be followed when installing this product.





















Indicates a prohibited action.
















## Procedure and Location Icons

These icons indicate the work location and the worker's point of view.

\*All icons are not used in all installation instructions.

	The location on the vehicle.		The location in the vehicle. (Instrument panel.)
	Wear eye protection.		Wear heavy gloves.
	Work by two or more people.		Place the part on a blanket.
	Mark with felt-tip pen.		Mark with pushpin. (Pierce through.)
	Mark with center punch.		Remove any burrs.
	Use touch-up paint and allow to dry.		Wrap the masking tape around the flat-tip screwdriver.
	Return the original part to the customer. (Do not reuse.)		Apply firm pressure while rolling, especially at the ends, to set the adhesive.
	Press firmly.		Tighten to the specified torque.
	Work perpendicularly.		Clean with isopropyl alcohol.


These icons indicate the name of part or location (also contain other instructions).

   ...	Name of part or location, etc.
   ...	Action or work instruction
   ...	Order of work
   ...	Position of clip
   ...	Position of retaining tab
(x 2) (x 3) (x 4) ...	Quantity


**Safety: General**

 **CAUTION**

Observe all safety notes and precautions described in the service information, in addition to those described in this Installation Instruction. Be extremely careful for your safety and the safety of others.

 **NOTICE**

- Always use the parts and tools specified in the installation instructions.
- Use a tire changer to install and remove the tires according to the directions in the operation manual furnished with the tire changer. Do not use a tire lever to install and remove the tires as it may cause damage to the tire and aluminum wheel.
- Follow the instructions in the online owner’s manual when raising the vehicle, and when removing and installing the wheels. Do not overtighten the wheel nuts.
- Be careful not to damage the vehicle or the parts.
- When using wheel balancer, refer to the Owner's Manual of used machinery.

 **NOTE**

The illustrations may differ slightly from the actual accessory.

## **Safety: Accessory**



### **NOTICE**

- This aluminum wheel is equipped with a tire pressure sensor. See the service information for the tire replacement and sensor installation procedures.
- Always install the correct sized tires specified in the tire and loading information label.
- Always use the specified wheel nuts and wheel lock nuts.
- The standard wheel nuts may not be used with the aluminum wheels. Replace them with the correct wheel nuts which are sold separately as described below.
- Do not install the accessory on a dirty surface or in direct sunlight.
- Make sure the ambient air temperature is 60 °F (15 °C) or above when installing accessories that use adhesive material.
- When pressing the accessory firmly with the palm of your hand, be careful not to damage it or the vehicle.
- When applying adhesive material, make sure it is lined up properly before attaching. Once the adhesive material touches the surface, do not try to remove it. If you do, you could damage the part.
- Do not wash the vehicle or moisten it for 24 hours to allow the adhesive to cure.









### **NOTE**

- The illustration is an example. It may differ from the actual parts such as shapes.
- This aluminum wheel is designed for use on a vehicle equipped with a tire pressure monitoring system (TPMS).

## PARTS LIST

### Aluminum Wheel Kit (P/N 08W19-36W-100)

Parts	Parts name	QTY	Remarks
	Aluminum wheel	1	The illustration may differ from the actual wheel.
	Wheel center cap	1	The illustration may differ from the actual center cap.
	Valve	1	
	Optional tire and loading information label	1	May not be used
	TPMS Information	1	Make sure your customer receives this information.
	Supplemental information	1	Make sure your customer receives this information.

## REQUIRED TOOLS AND SUPPLIES

- Ratchet
- 22 mm Socket
- Torque wrench
- Shop towel
- Isopropyl alcohol
- i-HDS
- Lubricant

## SPECIFICATIONS

Rim size	19 x 8 1/2J (inset 60)	
Tire size	235/40ZR19 96Y	
Bolt hole PCD	120 (5 holes)	
Tire pressure	Front	35 psi (240 kPa)
	Rear	33 psi (230 kPa)



## INSTALLATION

### ■ Installing the Wheels

**1** Install the valves.

**2** Install the tires.

#### CAUTION

- Check that there is no damage to the bead area.
- Use a lubricant to install the tires.
- Always adjust to the tire pressure specified in the tire and loading information label.

**3** Install the wheel center caps.

**4** Install the wheels.

#### NOTE



The wheel nut torque is 94 lb-ft (127 N·m).

5 Choose one of these options.

• Installing optional summer tire	
	Go to step <a href="#">6</a>
• Installing standard tire	
	Go to step <a href="#">26</a>

6 Clean the attaching area.

7 Attach the optional tire and loading information label.

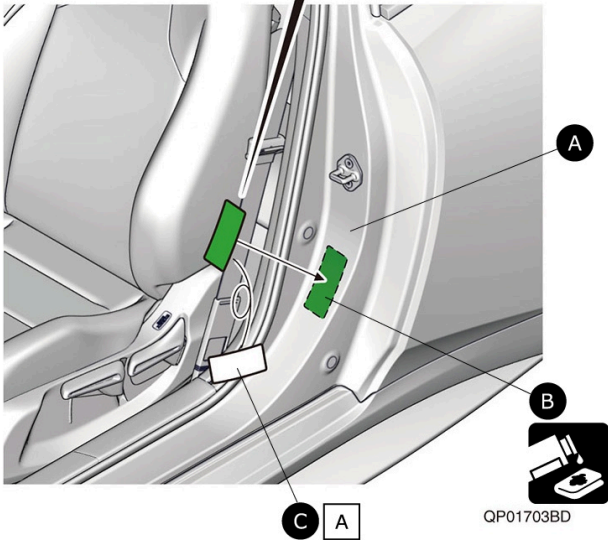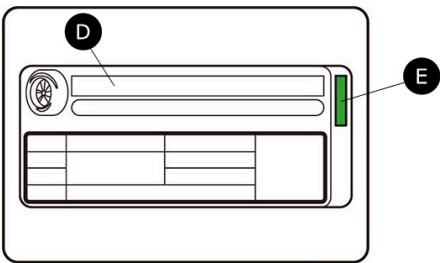

<b>A</b>	VEHICLE PANEL
<b>B</b>	STANDARD TIRE AND LOADING INFORMATION LABEL
<b>C</b>	ADHESIVE BACKING
<b>D</b>	OPTIONAL TIRE AND LOADING INFORMATION LABEL
<b>E</b>	6W19A
<b>A</b>	Remove.

## ■ Tire Pressure Programming

### NOTE

Make sure you are using the latest i-HDS version as described on SIS.

- 8 Connect the i-HDS to the OBD II data link connector, then turn the ignition switch to ON.
- 9 Start the Diagnostic System, select Connect to the Vehicle.
- 10 Select System Selection Menu.
- 11 Select ABS/VSA, and click the check button.
- 12 Select Deflation Warning System, and click the check button.
- 13 Select YES.
- 14 Select YES.
- 15 Select 19 inch, and click the check button.
- 16 Select Summer, and click the check button.
- 17 When you see this message: Turn the ignition switch off. Turn the ignition to OFF.
- 18 When you see this message: Turn the ignition switch on. Turn the ignition to ON.
- 19 Click the check button.

**20** Disconnect the i-HDS.

**21** Do the TPMS calibration according to the instructions in the service information (TPMS Calibration).

**22** After finishing the work, write tire size, tire type, tire pressure, i-HDS version, dealer name, technician's signature, and date in Service History Page for Honda Accessory Alloy Wheels page included in this kit.

**NOTE**

Make sure to give the TPMS information to your customer and explain any tire pressure changes.

## ■ Deflation Warning System Threshold Rewriting

If the standard tires are to be installed back on the vehicle, you must change the threshold value with the i-HDS.

**23** Refer to steps [8](#) to [21](#).

### NOTE

For step [16](#), select the Mud and snow.

**24** Attach the standard tire and loading information label over the old label in the driver's doorjamb.

**25** After finishing the work, write tire size, tire type, tire pressure, i-HDS version, dealer name, technician's signature, and date in Service History Page for Honda Accessory Alloy Wheels page.

**26** Check that all parts are installed properly.